



Another Way to View Propagation Predictions for DXing and Contesting

By R. Dean Straw, N6BV
Senior Assistant Technical Editor, ARRL

April 22, 2006

International DX Convention
Visalia, CA



I will talk about the following:

- Area-coverage predictions using *VOAAREA*.
- I will compare *VOAAREA* predictions to actual results for the 2005 Sweepstakes Phone contest.
- I will discuss how to make customized antennas for *VOAAREA*.



The *VOAAREA* Program

- *VOAAREA* is one of the programs in the software suite that come with *VOACAP*.
- *VOAAREA* creates customizable contours on several selectable map projections.
- One of the key parameters is setting the antenna properly, for both receiver and transmitter.



Table of Sigs/Elevs -- Chicago

04 = Zone, Nov., CA (San Francisco) to IL (Chicago), SSN = Very Low, S-Units

GMT	Sig	Elev	Sig	Elev	Sig	Elev	Sig	Elev	Sig	Elev
0	9+	29.3	9+	22.6	9+	2.6	4	5.9	-	-
1	9+	22.1	9+	13.9	9+	6.1	-	-	-	-
2	9+	22.9	9+	15.7	9	6.3	-	-	-	-
3	9+	24.3	9	10.3	4	6.7	-	-	-	-
4	9+	25.7	9+	11.4	2	5.3	-	-	-	-
5	9+	26.2	9+	11.5	2	7.6	-	-	-	-
6	9+	25.9	9+	11.1	4	7.5	-	-	-	-
7	9+	25.2	9+	10.6	6	7.2	-	-	-	-
8	9+	24.7	9+	17.6	8	7.0	-	-	-	-
9	9+	24.8	9+	17.6	7	7.1	-	-	-	-
10	9+	25.7	9+	19.4	5	7.5	-	-	-	-
11	9+	26.8	9	4.1	-	-	-	-	-	-
12	9+	27.0	9	4.2	-	-	-	-	-	-
13	9+	25.6	9+	18.3	7	7.7	-	-	-	-
14	9+	31.5	9+	14.9	9+	4.9	-	-	-	-
15	9	27.5	9+	22.3	9+	2.4	9	6.3	-	-
16	5	34.7	9	15.6	9+	15.1	9+	6.4	1	6.0
17	-	-	9	22.4	9+	13.8	9+	3.1	5	6.0
18	-	-	7	22.5	9+	13.1	9	2.3	7	5.8
19	-	-	7	23.5	9+	13.0	9	2.2	8	5.9
20	-	-	7	23.7	9+	13.8	9+	2.6	8	5.8
21	-	-	9	17.9	9+	14.3	9+	3.1	6	6.1
22	7	34.9	9+	15.4	9+	14.8	9+	3.6	1	6.0
23	9	30.9	9+	21.9	9+	2.1	9+	5.9	-	-

Decent 15
meter opening
predicted

Some 10
meter signals
predicted

I've presented this tabular format in various forums in the past.



Table of Sigs/Elevs – East Coast

05 = Zone, Nov., CA (San Francisco) to Washington (D.C.), SSN = Very Low, S-Units

GMT	Sig	Elev	Sig	Elev	Sig	Elev	Sig	Elev	Sig	Elev
0	9	21.9	9+	15.7	9	13.3	-	-	-	-
1	9+	22.1	9+	17.0	1	13.7	-	-	-	-
2	9+	23.2	9+	9.5	4	1.2	-	-	-	-
3	9+	24.7	9+	10.8	1	1.6	-	-	-	-
4	9+	25.9	9+	11.9	1	2.0	-	-	-	-
5	9+	26.3	9+	12.0	2	2.1	-	-	-	-
6	9+	25.8	9+	11.3	3	2.0	-	-	-	-
7	9+	25.0	9+	10.7	5	1.8	-	-	-	-
8	9+	24.5	9+	10.3	6	1.6	-	-	-	-
9	9+	24.8	9+	10.5	6	1.7	-	-	-	-
10	9+	25.8	9+	11.3	2	2.1	-	-	-	-
11	9+	26.7	9+	12.4	-	-	-	-	-	-
12	9+	26.0	9+	11.7	1	2.3	-	-	-	-
13	9	24.2	9+	19.2	8	1.9	-	-	-	-
14	8	23.9	9+	16.1	8	14.4	1	1.3	-	-
15	4	26.9	9	15.4	9+	8.5	-	-	-	-
16	-	-	8	16.7	9+	7.7	4	13.1	-	-
17	-	-	5	21.7	9+	7.4	8	12.6	-	-
18	-	-	3	22.7	9	15.7	8	13.0	-	-
19	-	-	3	24.1	9+	9.0	9	13.1	-	-
20	-	-	6	19.2	9+	8.5	9	13.0	-	-
21	1	34.8	8	17.6	9+	8.4	7	13.3	-	-
22	4	27.5	9	15.9	9+	8.4	2	13.2	-	-
23	8	23.3	9+	21.7	9+	9.1	2	13.2	-	-


No 10 meters

15 meters
doesn't last
long



“Traditional” Summary, All Bands


San Francisco to Rest of USA, November 2005 SS

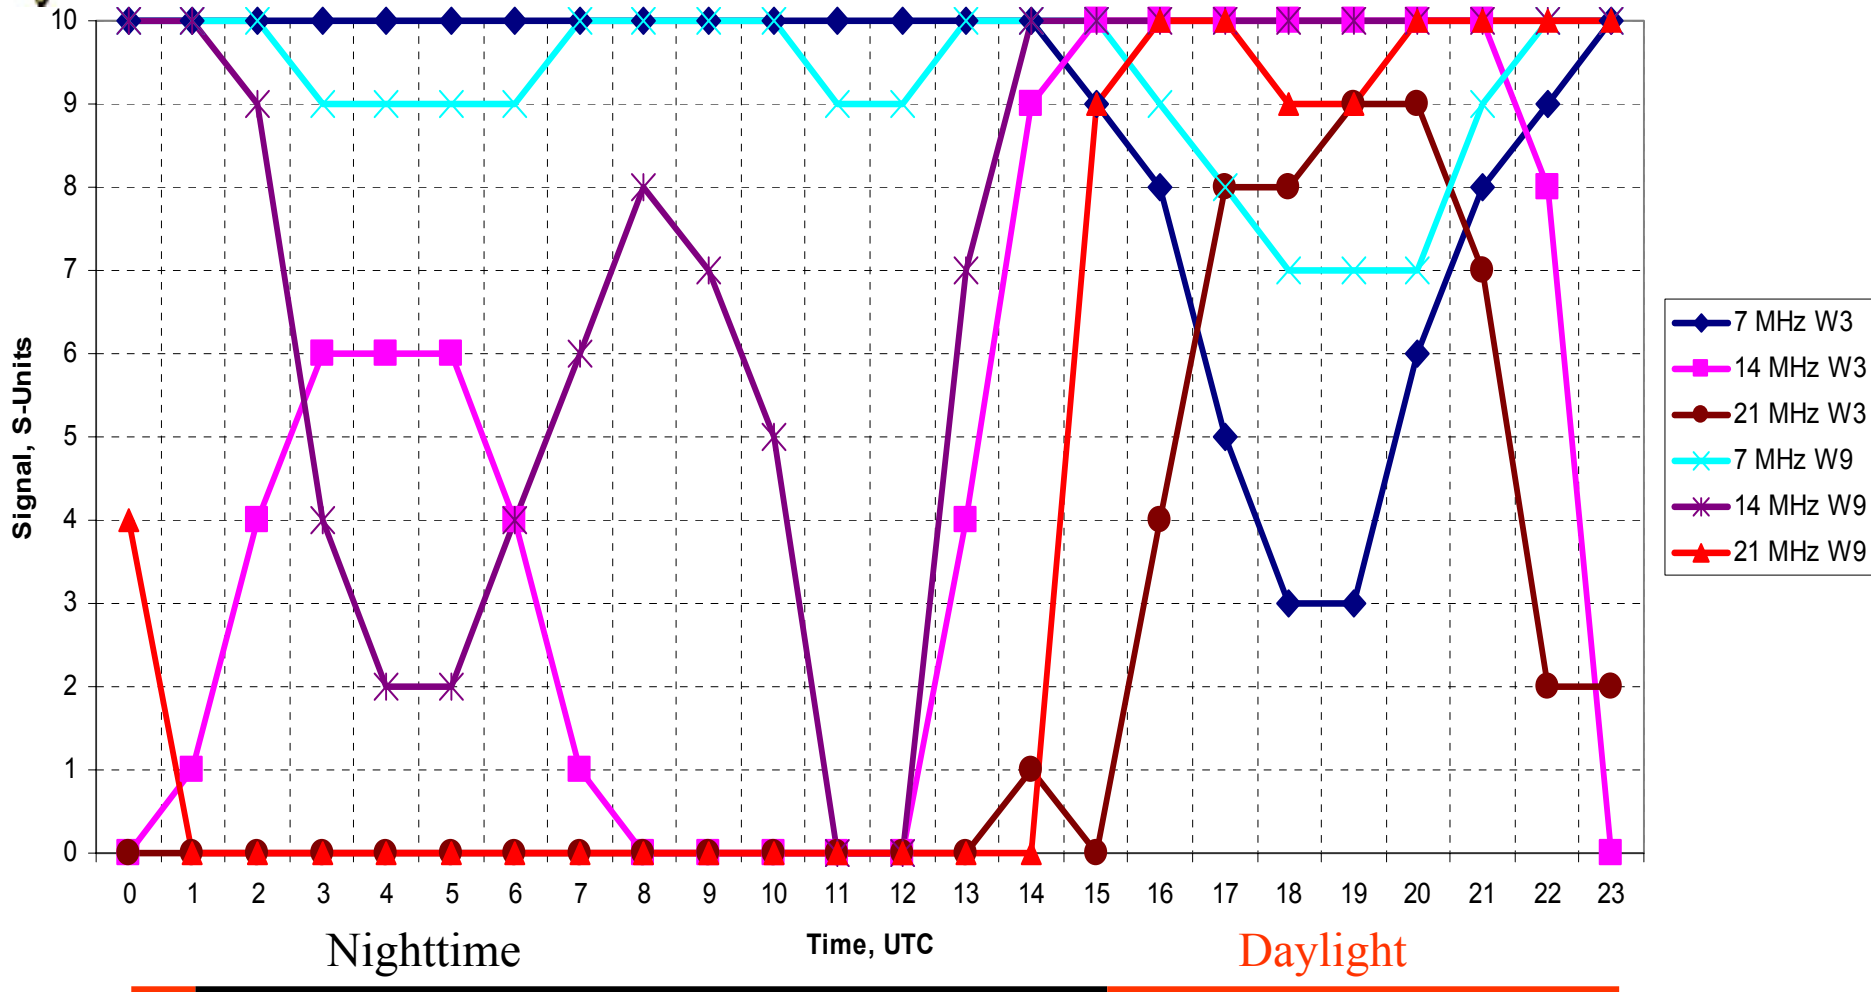


Complicated, isn't it??



Coverage – Most Populous Areas

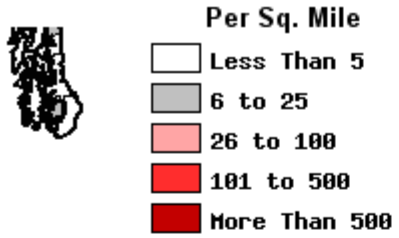


2000 Population Density

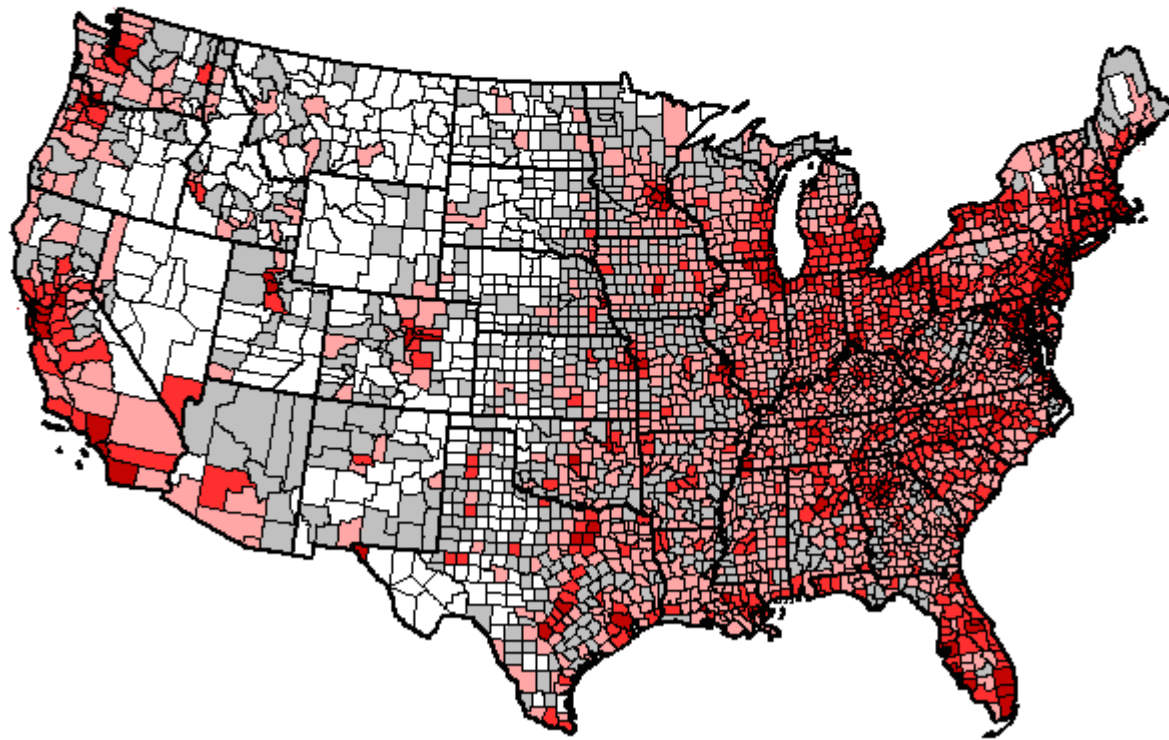

US Census 2000 Data



Coverage – Most Populous Areas

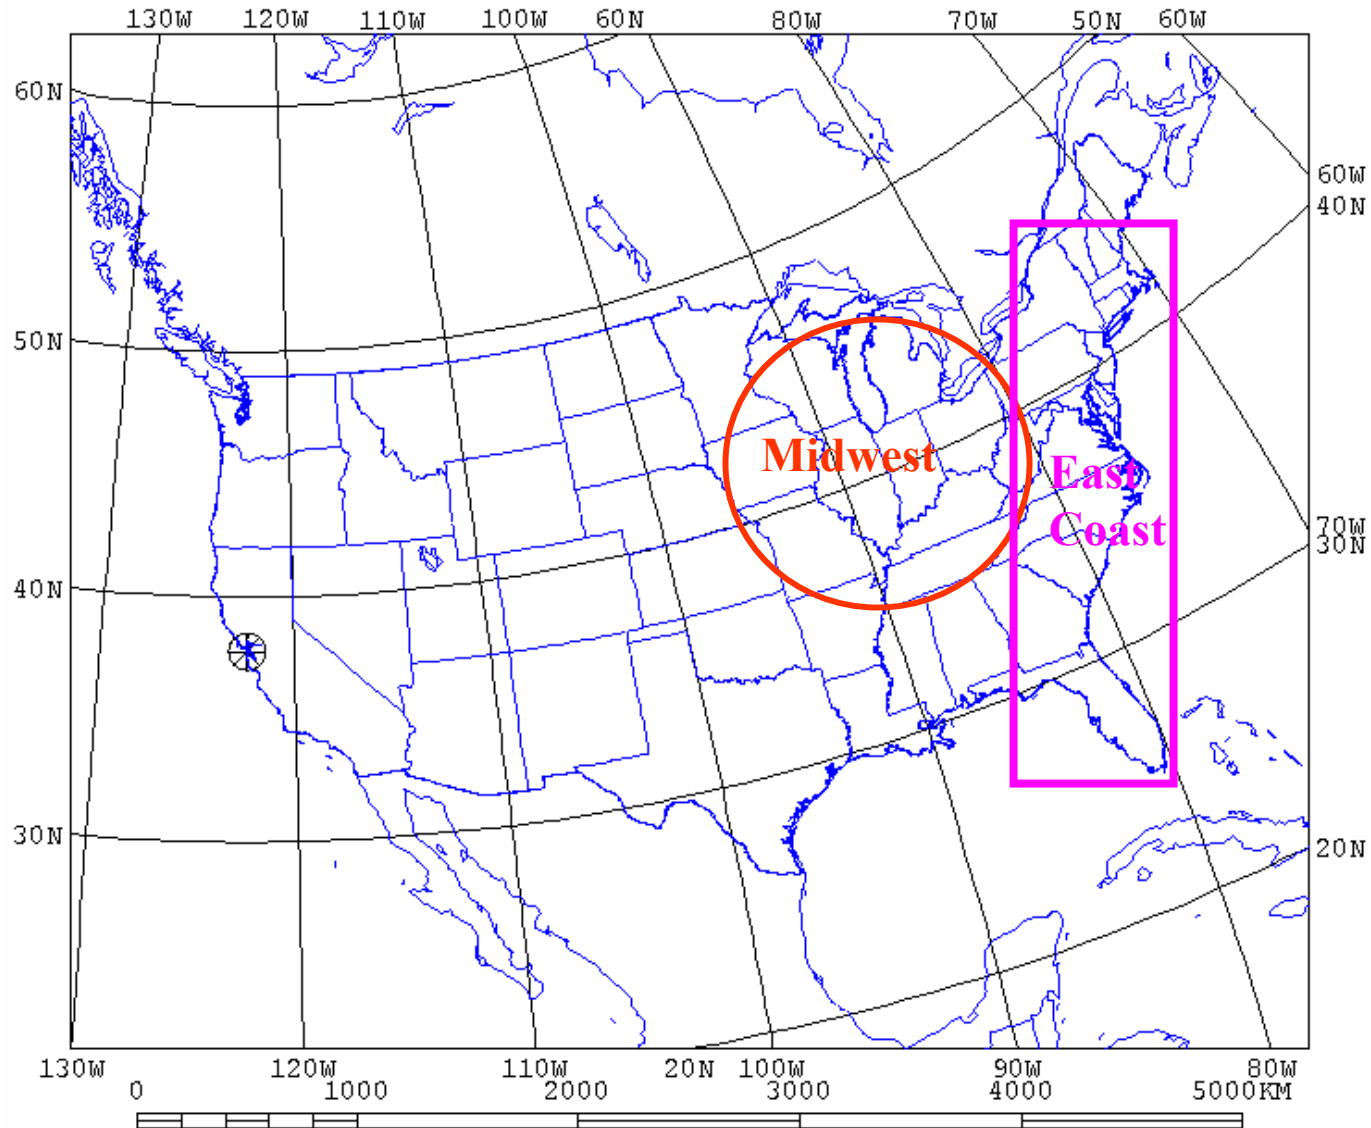



Sweepstakes 2005 Modeling Assumptions for *VOAAREA*

- Antennas: 3-element Yagi at 55 feet over flat ground for 20, 15 and 10 meters.
- Antennas for 40 and 80 meters: Dipoles at 75 feet over flat ground.
- Antenna are a little smaller than my usual assumptions but represent realistic stations.
- 1500 W of RF power.
- Very Low SSN = 10.



80-Meter Coverage


- Unless you have really big antennas on 80 meters, this band can be very challenging in Sweepstakes from California.
- Particularly to the East Coast.
- The area coverage plots that follow are centered on Chicago, Washington (DC) and San Francisco.

CHICAGO [Dipole @ 7] 1.5kW 80deg 02ut 3.800MHz Nov 10ssn

SDBW

Tx location to grid of Rx

AREADATA\DEFAULT\CHIC4.V19

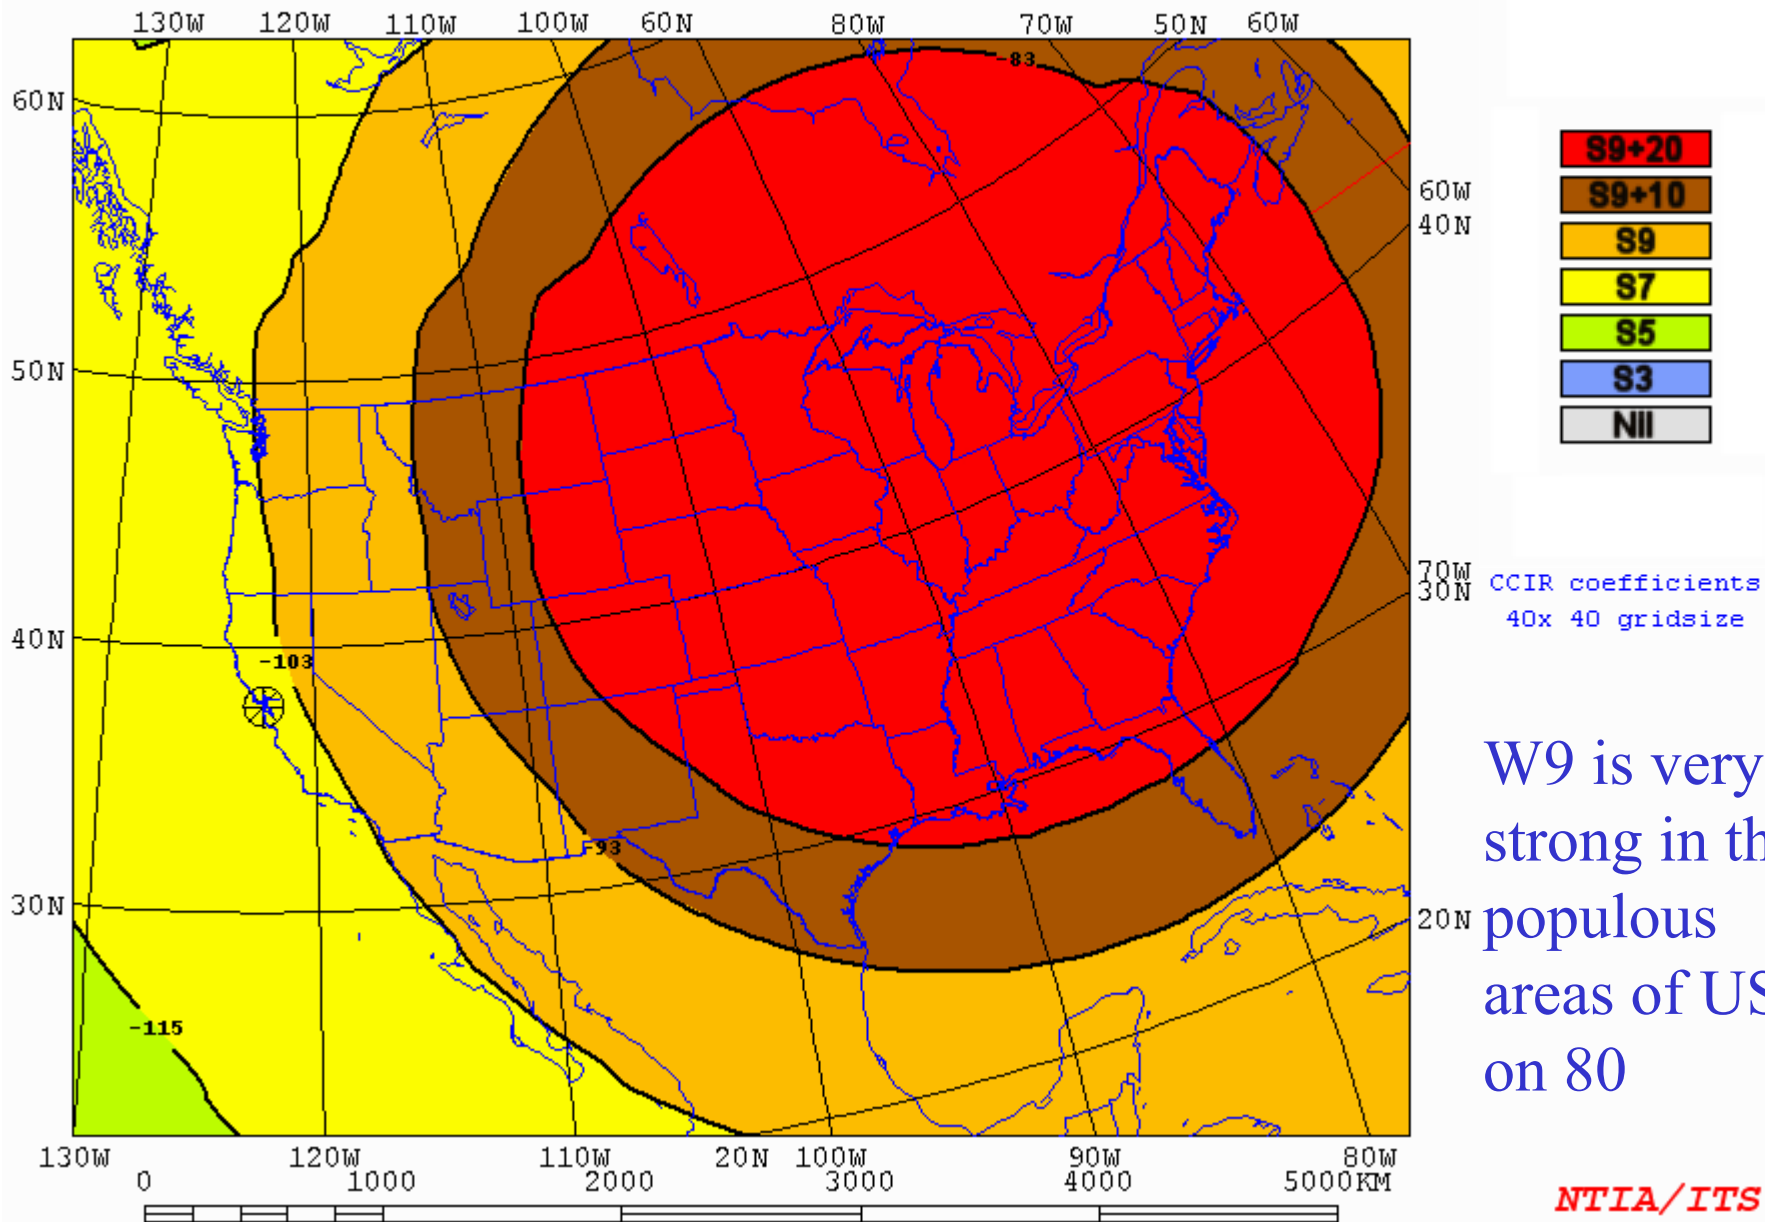


W9 is very strong in the populous areas of USA on 80

WASHINGTON [Dipole @ 7] 1.5kW 80deg 02ut 3.800MHz Nov 10ssn

SDBW


Tx location to grid of Rx

AREADATA\DEFAULT\WASH4.V19

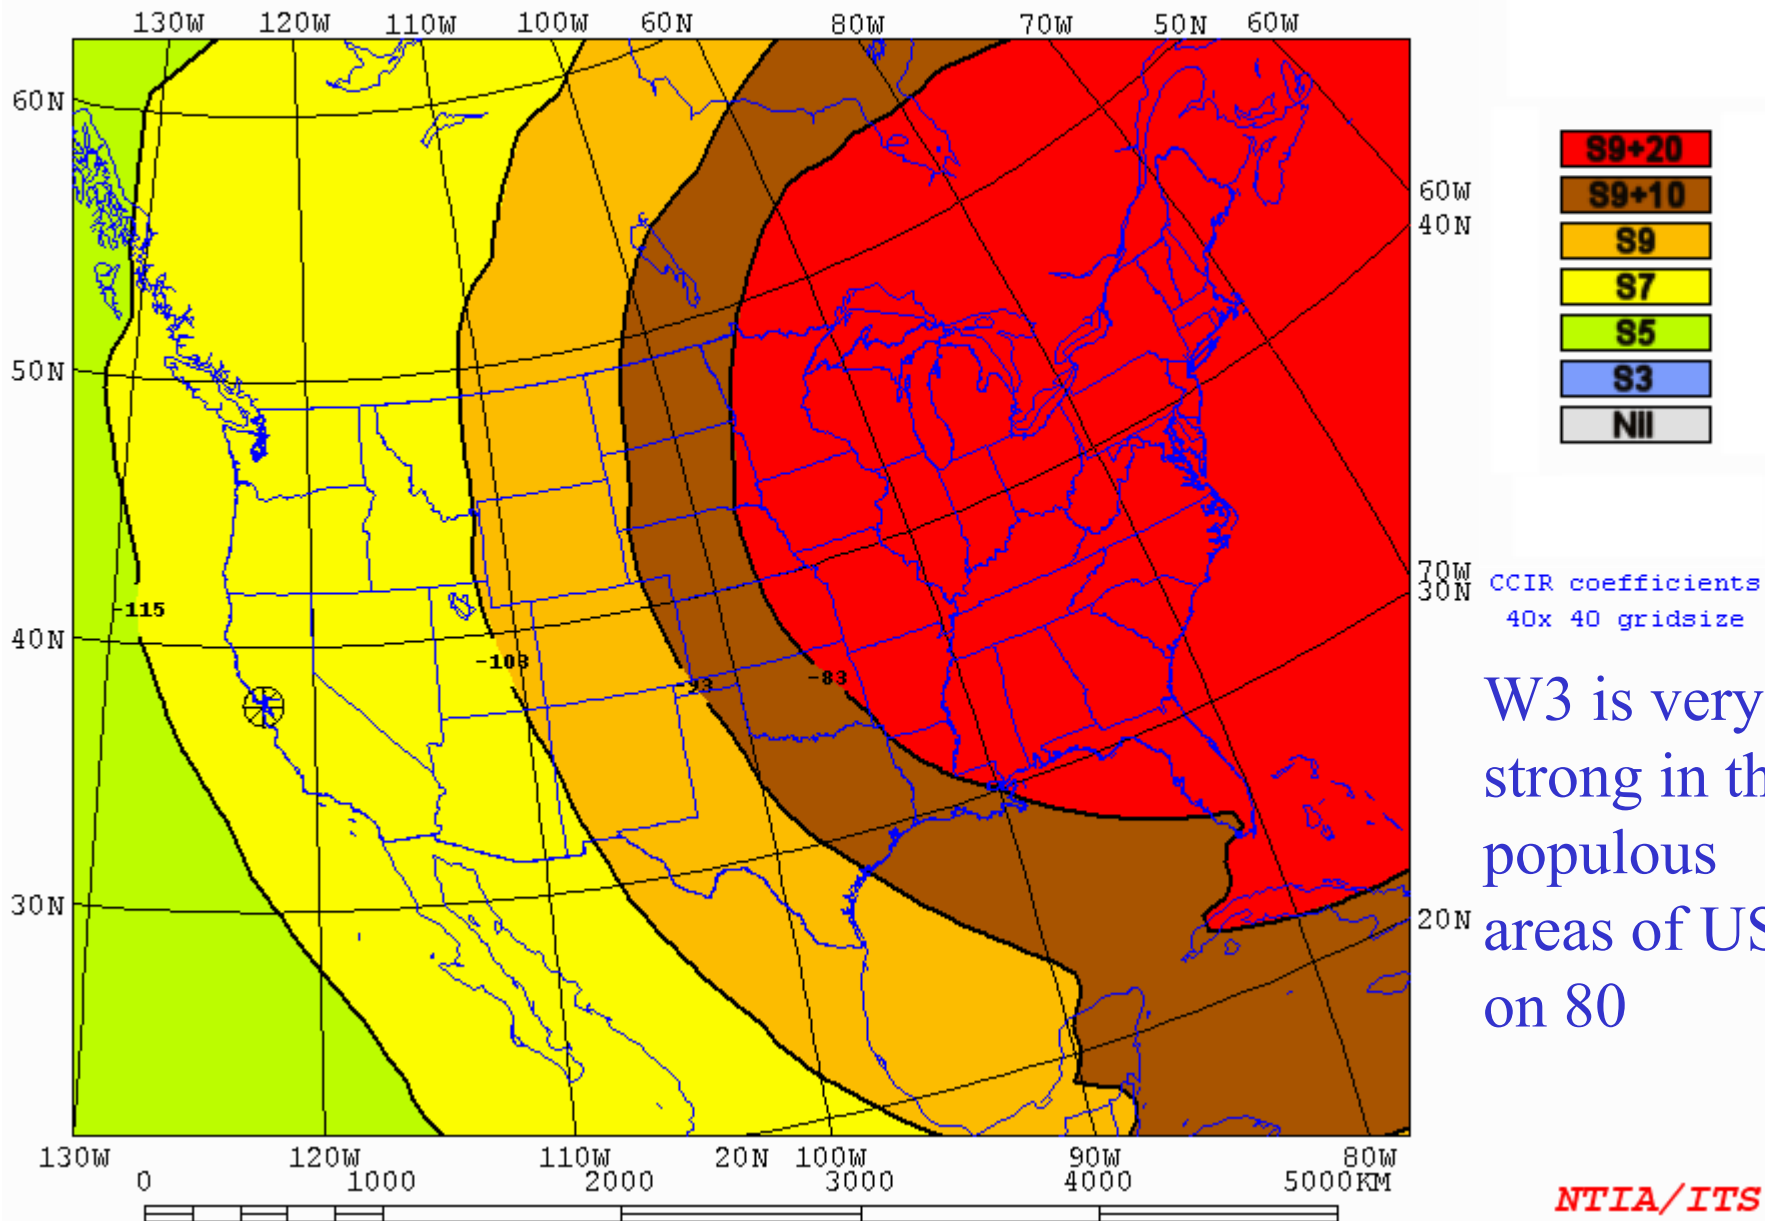

Tx location to grid of Rx

AREADATA\DEFAULT\SF4.V19

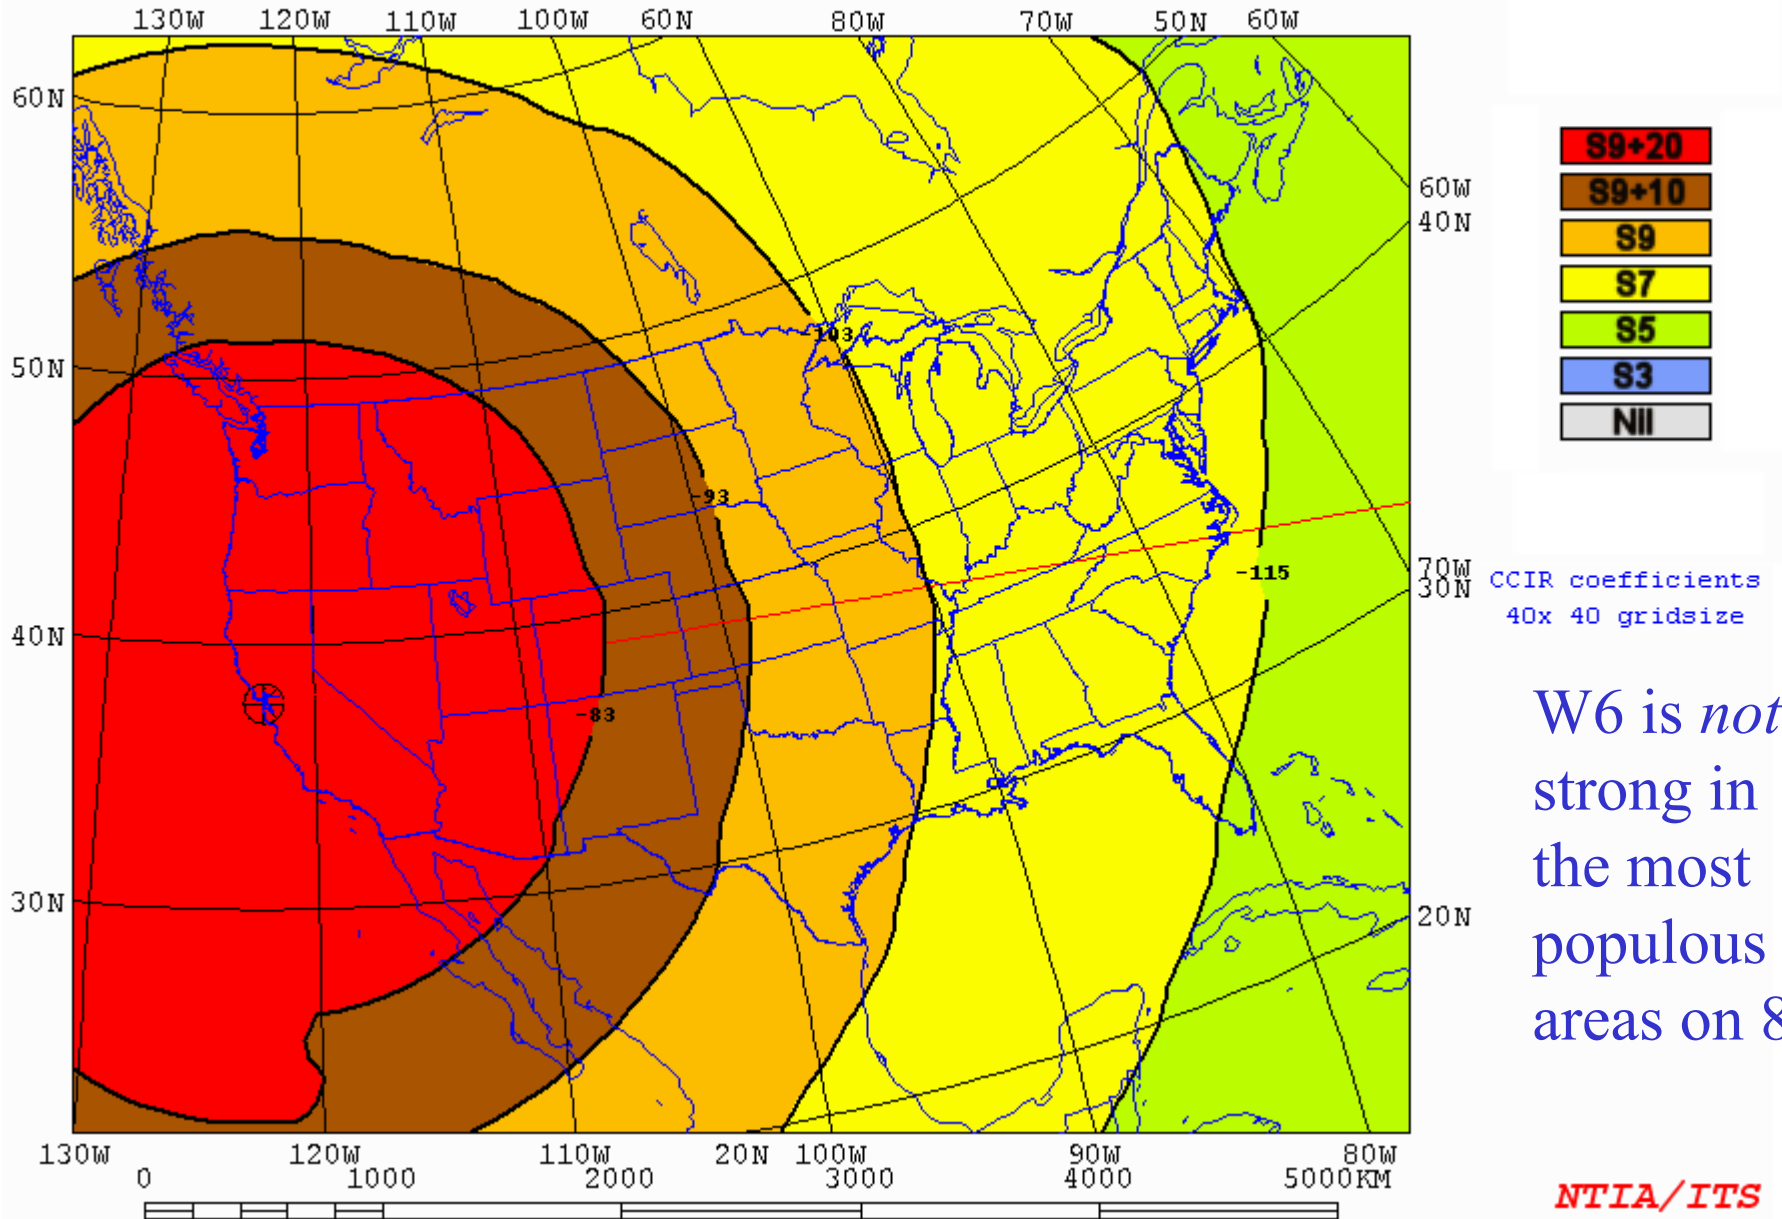



40-Meter Coverage


- Bigger antennas help on 40 meters (although dipoles don't do badly).
- Big antennas are needed on phone, especially to run the East Coast.
- QRO is important for rate on 40.
- There are times when the East Coast and Midwest go “long skip” and then Californians can have some advantages.

CHICAGO [Dipole @ 7] 1.5kW 80deg 02ut 7.200MHz Nov 10ssn

SDBW


Tx location to grid of Rx

AREADATA\DEFAULT\CHIC7.V19

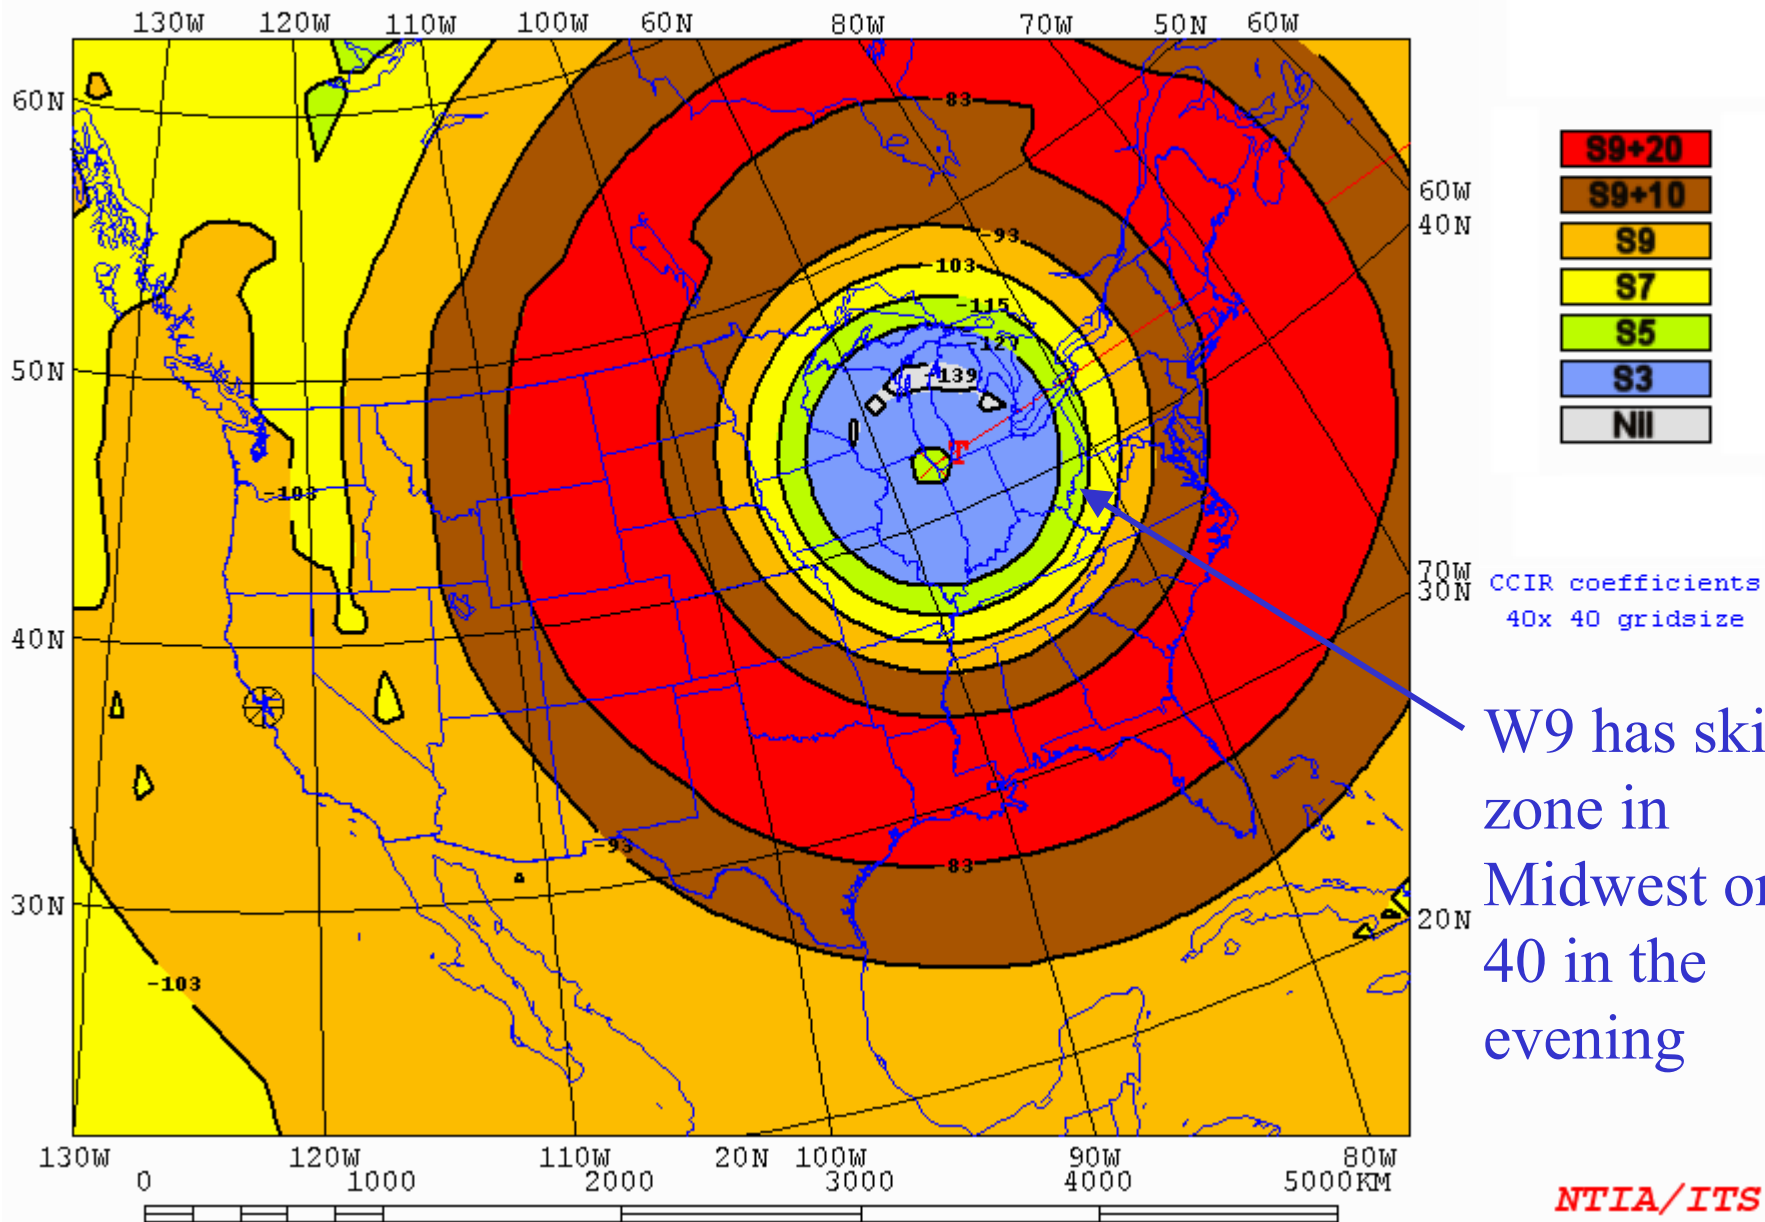


Tx location to grid of Rx

AREADATA\DEFAULT\WASH7.V19

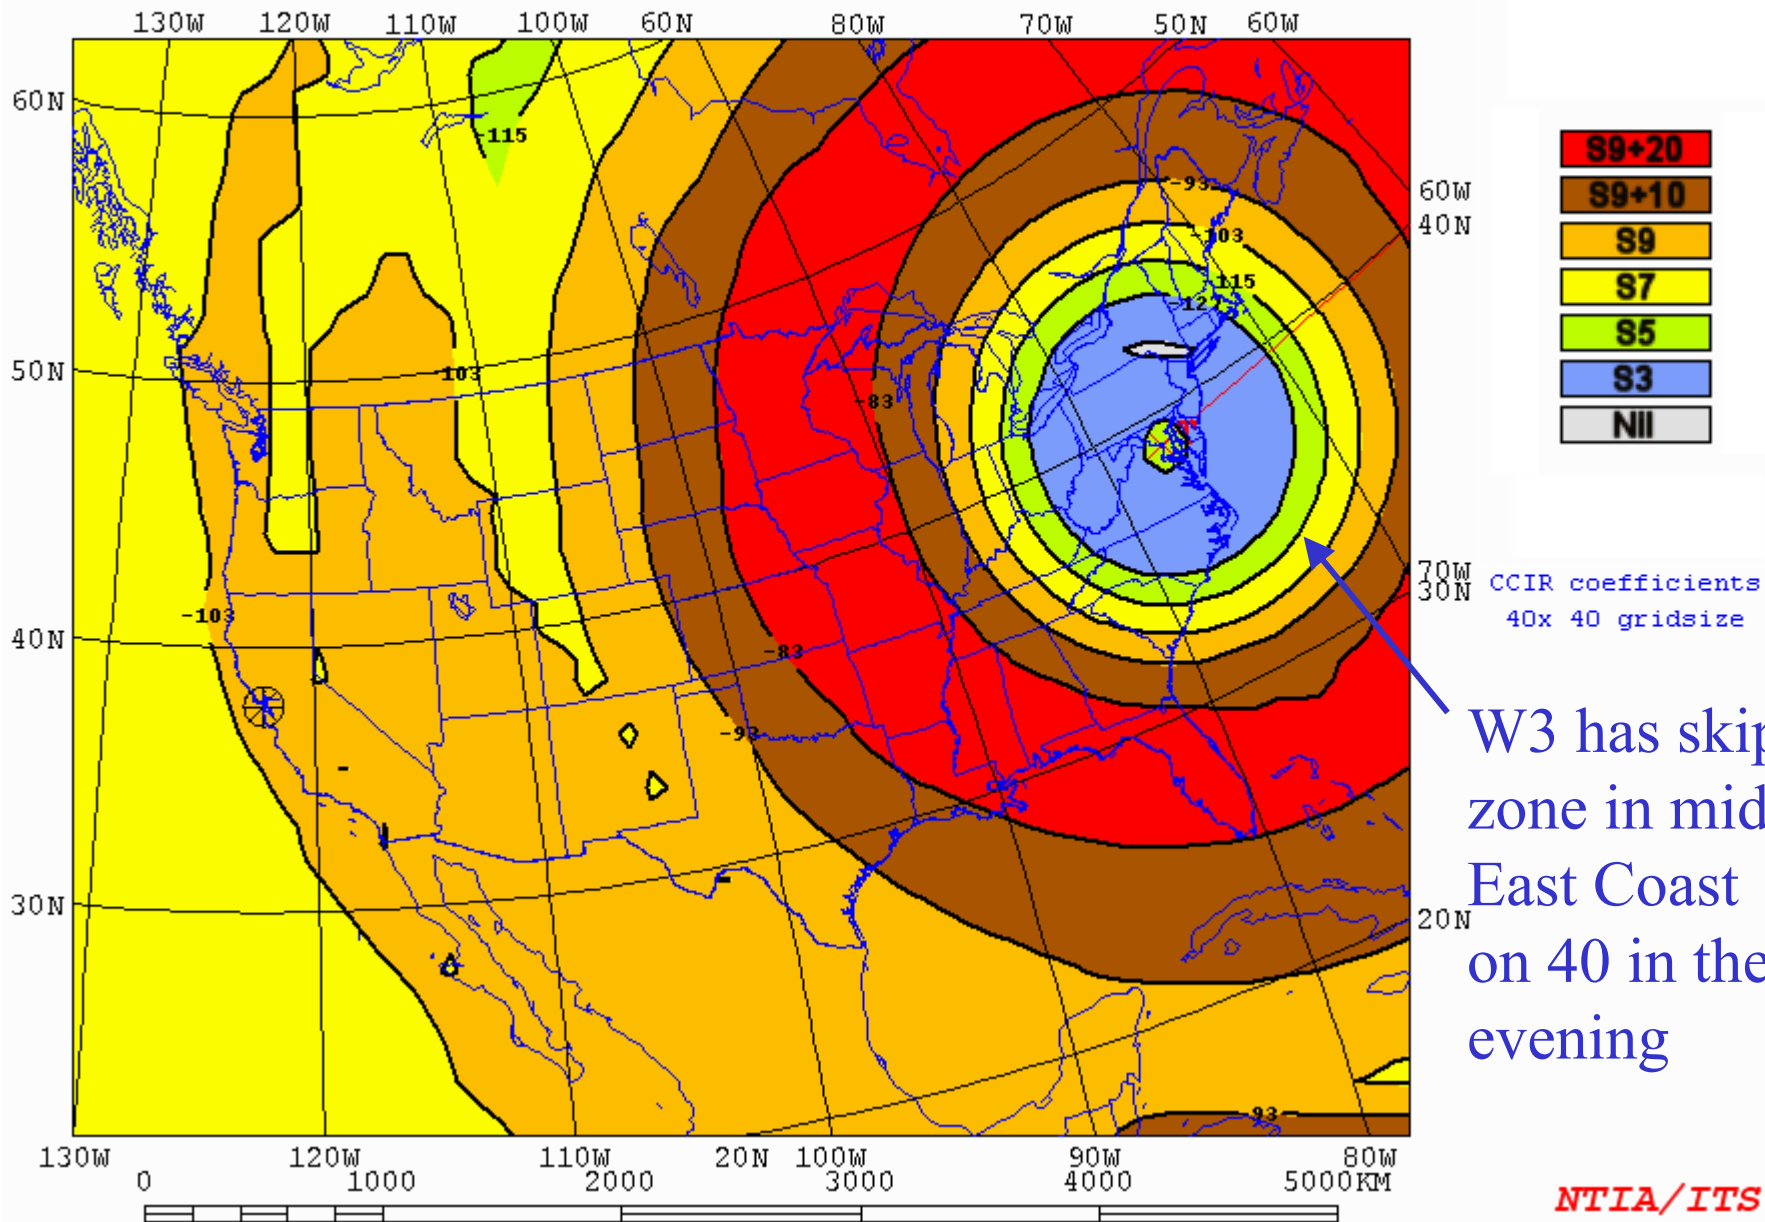

Tx location to grid of Rx

AREADATA\DEFAULT\SF7.V19

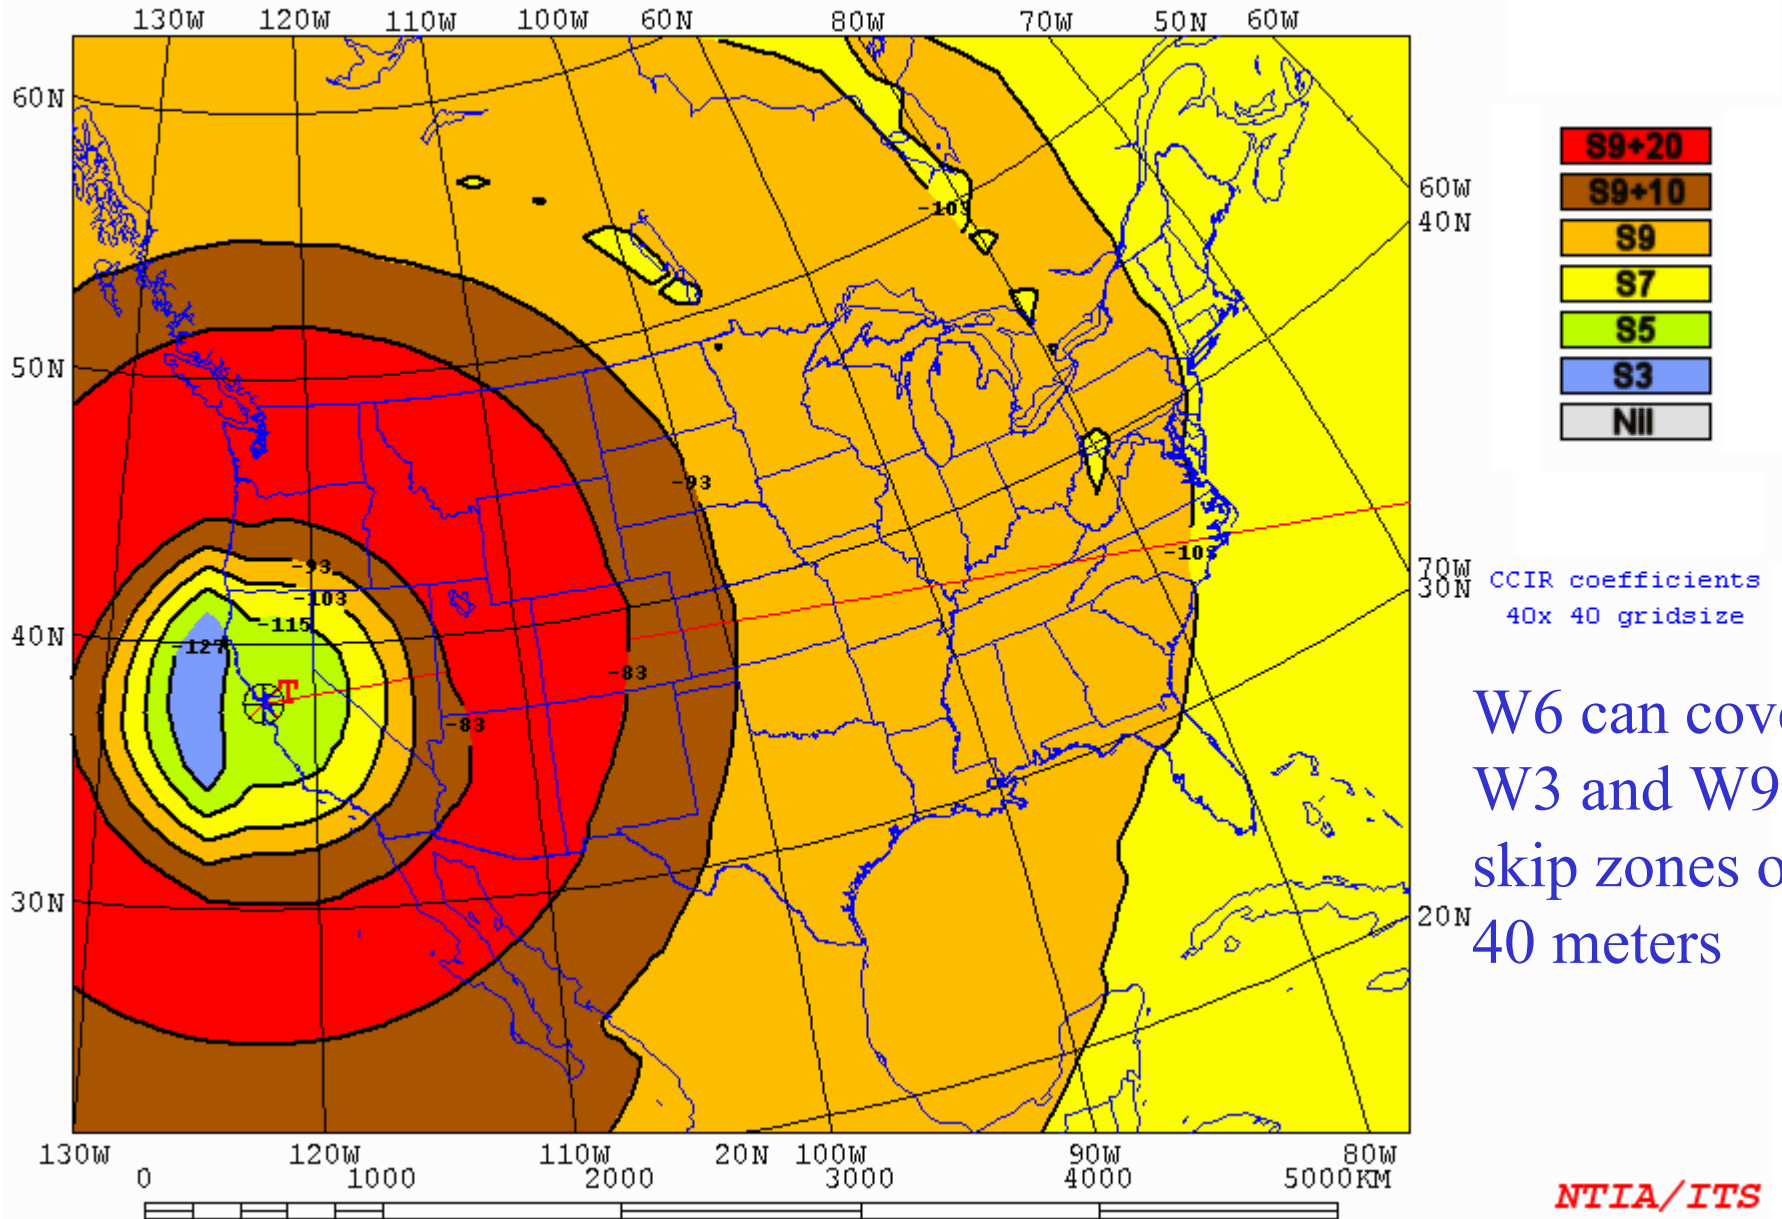



40-Meter “Movie” Sequence


- From 23 UTC to 12 UTC (late afternoon to East Coast sunrise).
- Assumes 75-foot high 40-meter dipoles.
- Assumes 1500 W.

SAN FRANCISCO [Dipole @ 7] 1.5kW 80deg 23ut 7.200MHz Nov 10ssn

SDBW

Tx location to grid of Rx

AREADATA\DEFAULT\SF7.V16

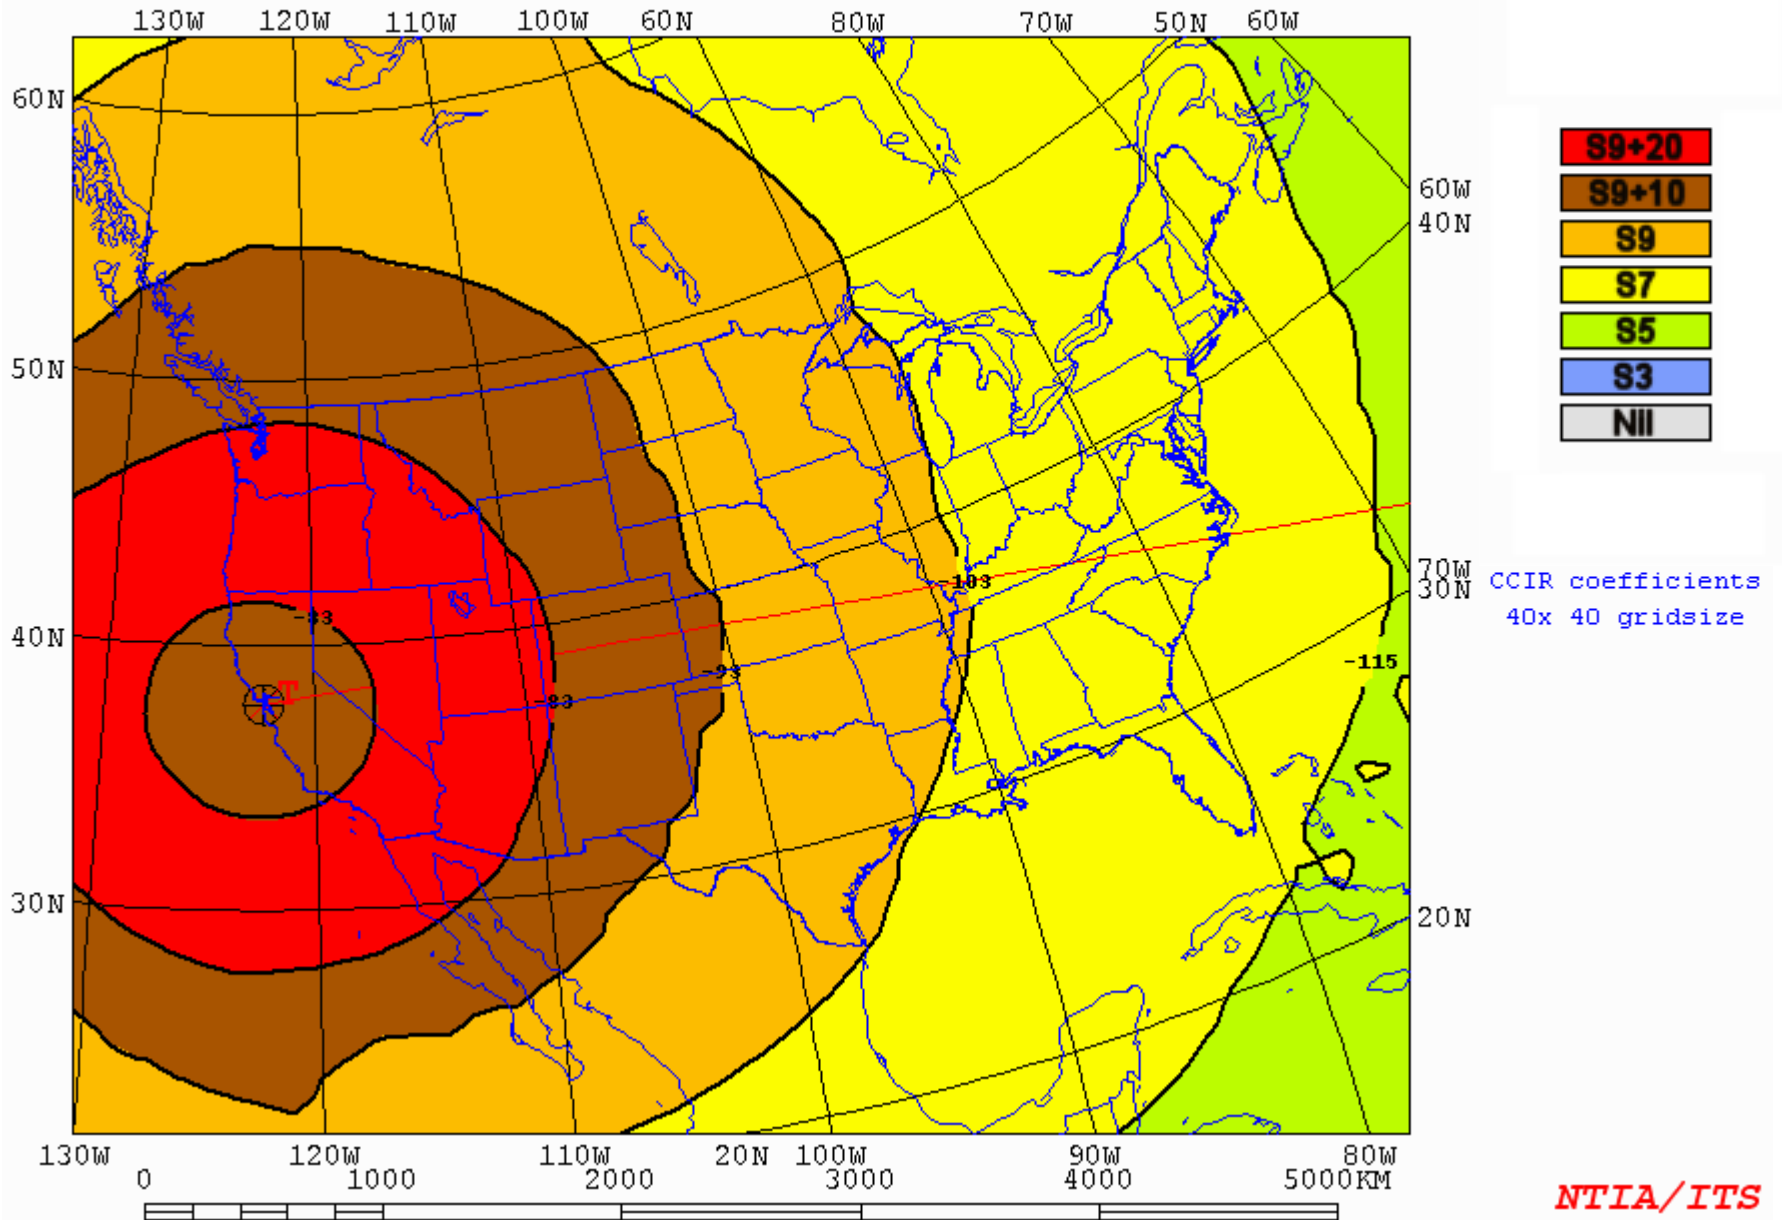


SAN FRANCISCO [Dipole @ 7] 1.5kW 80deg 24ut 7.200MHz Nov 10ssn

SDBW



Tx location to grid of Rx

AREADATA\DEFAULT\SF7.V17

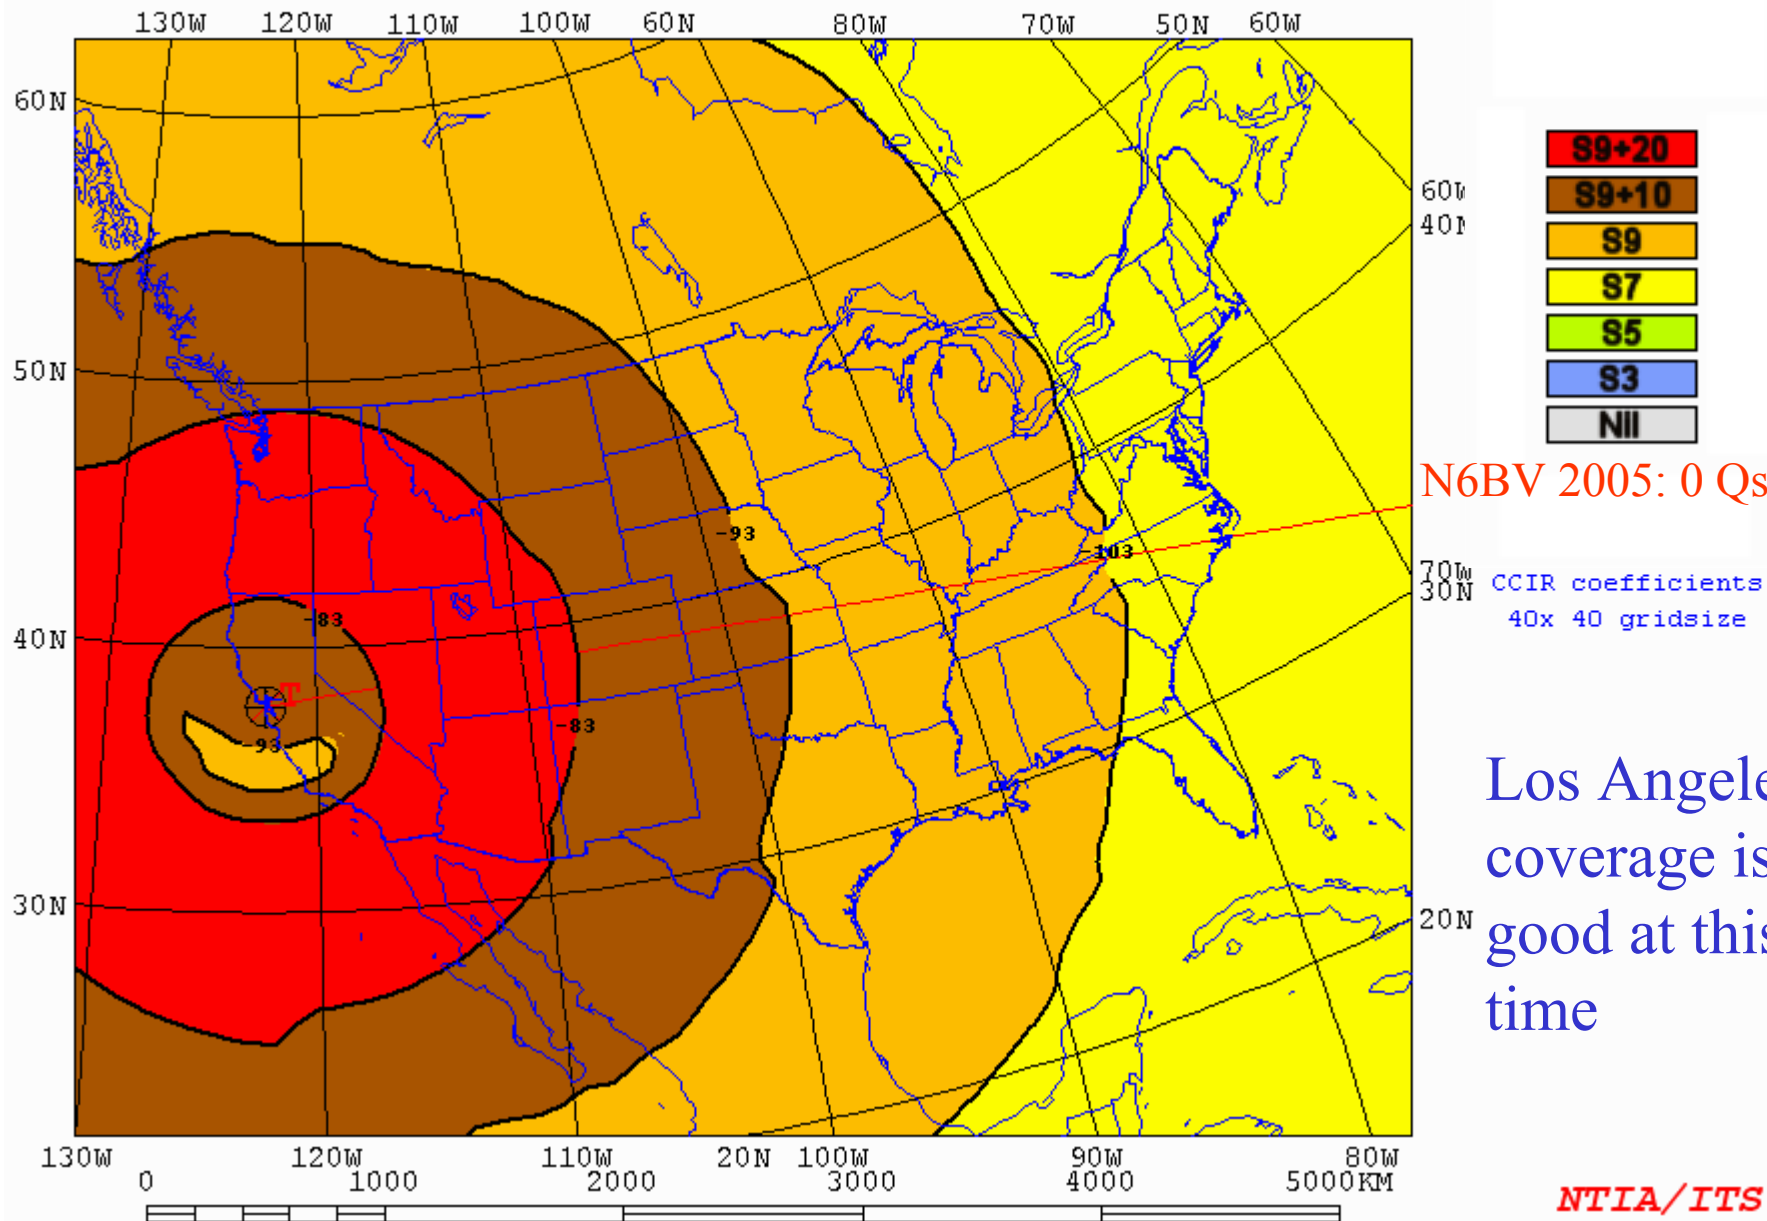

Tx location to grid of Rx

AREADATA\DEFAULT\SF7.V18

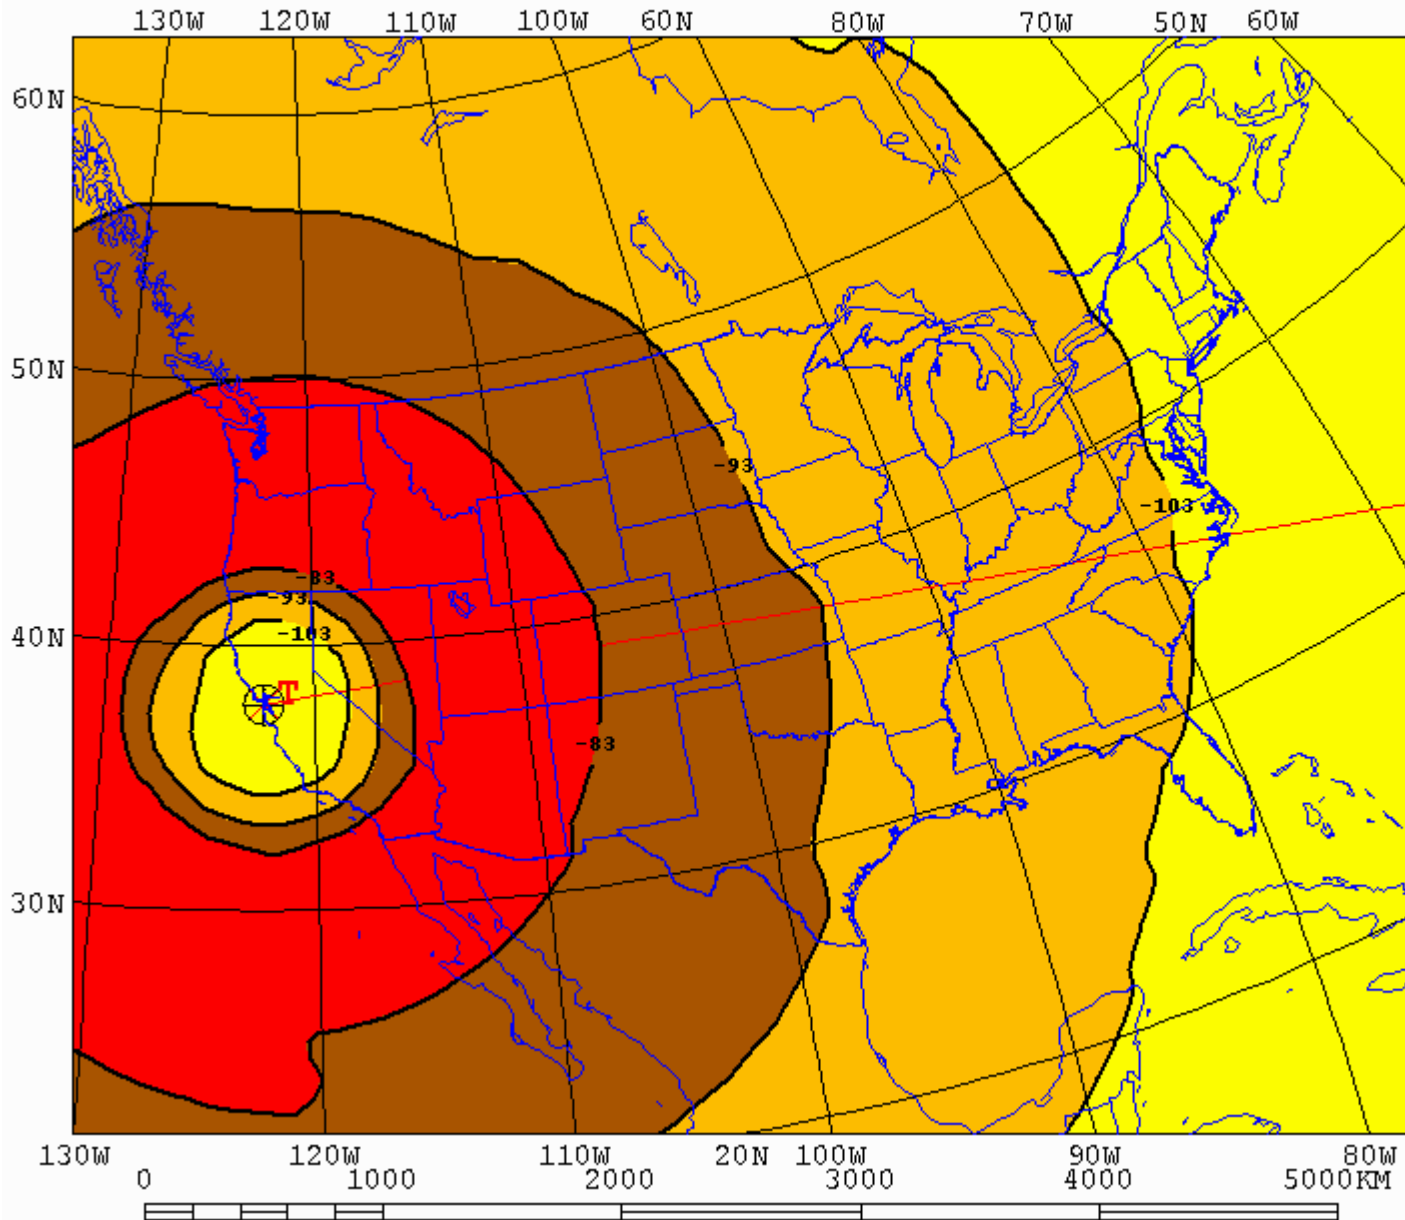


2005: 59 Qs

CCIR coefficients
40x 40 gridsize

Los Angeles
coverage
beginning to
go long


Tx location to grid of Rx

AREADATA\DEFAULT\SF7.V19

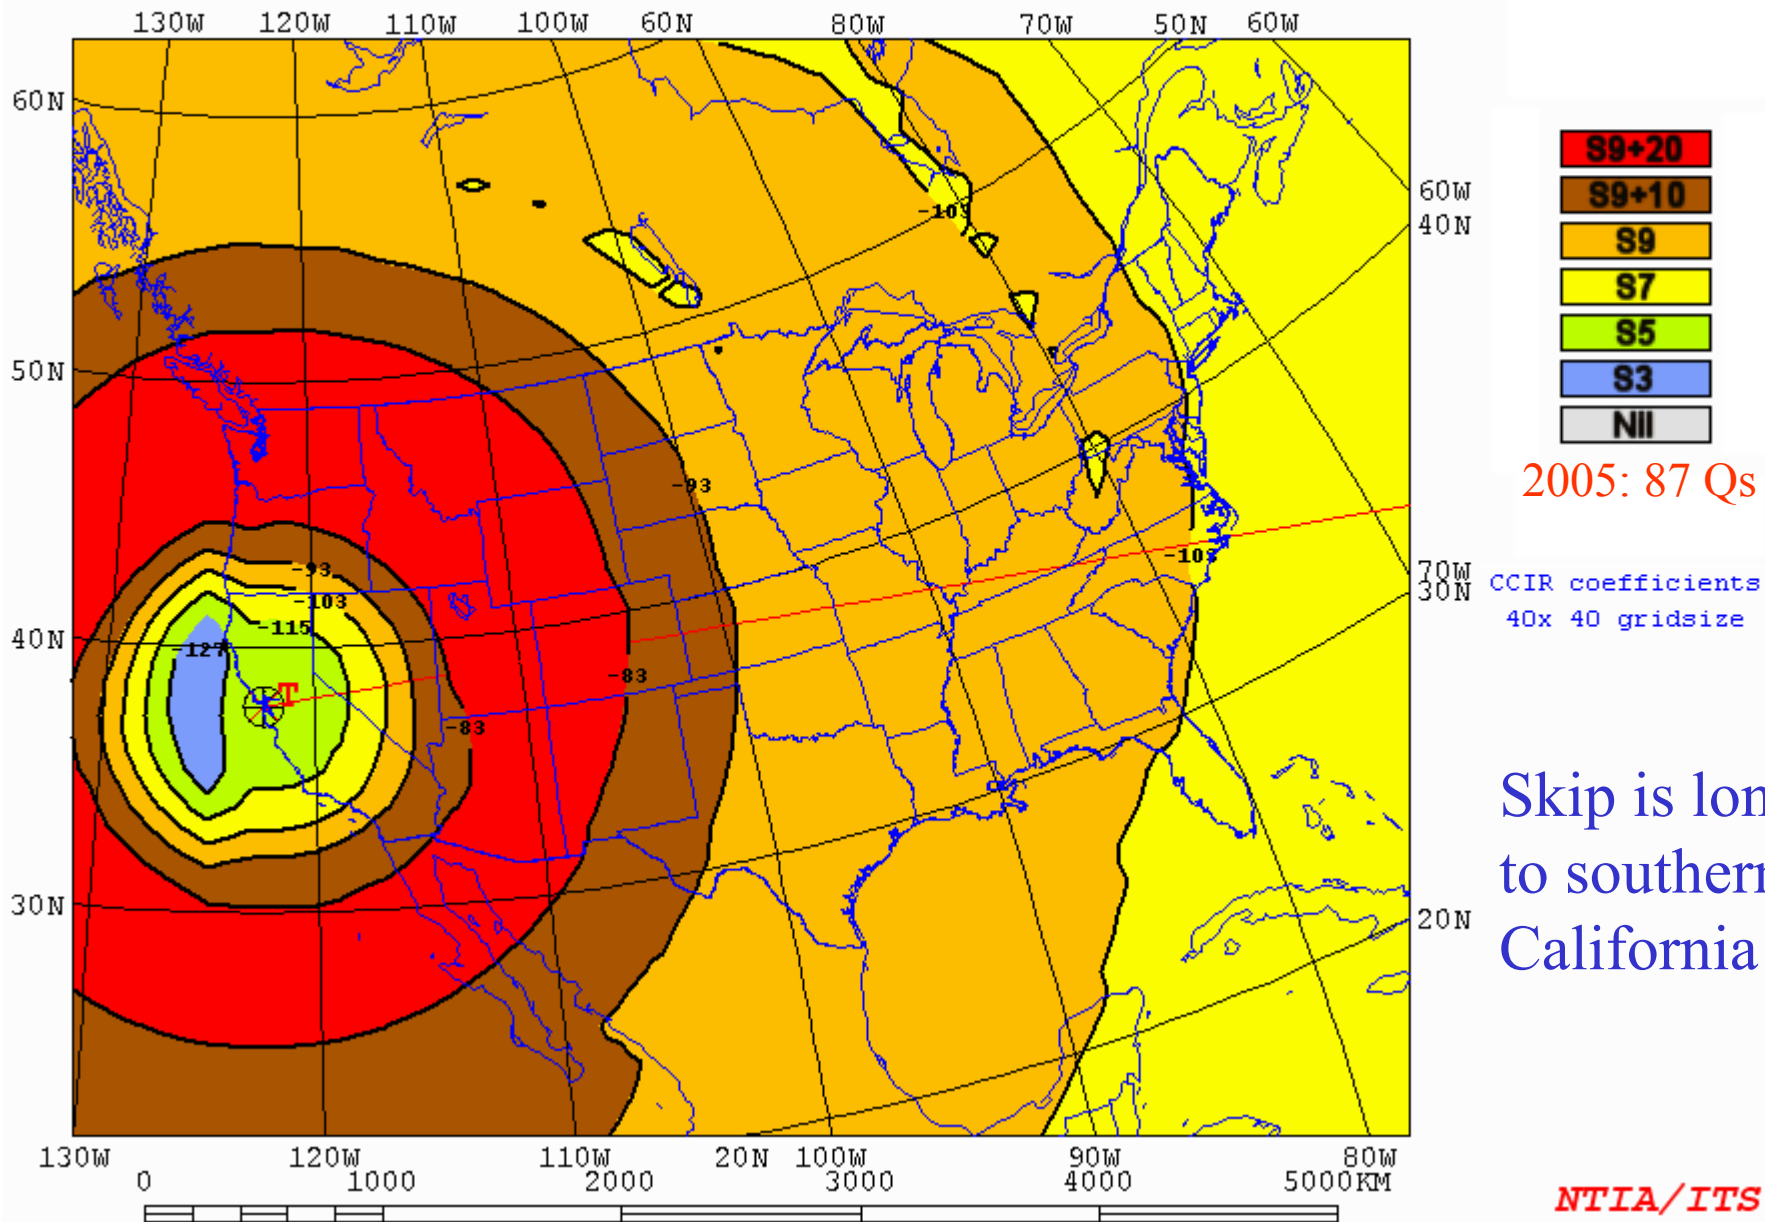


Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V11

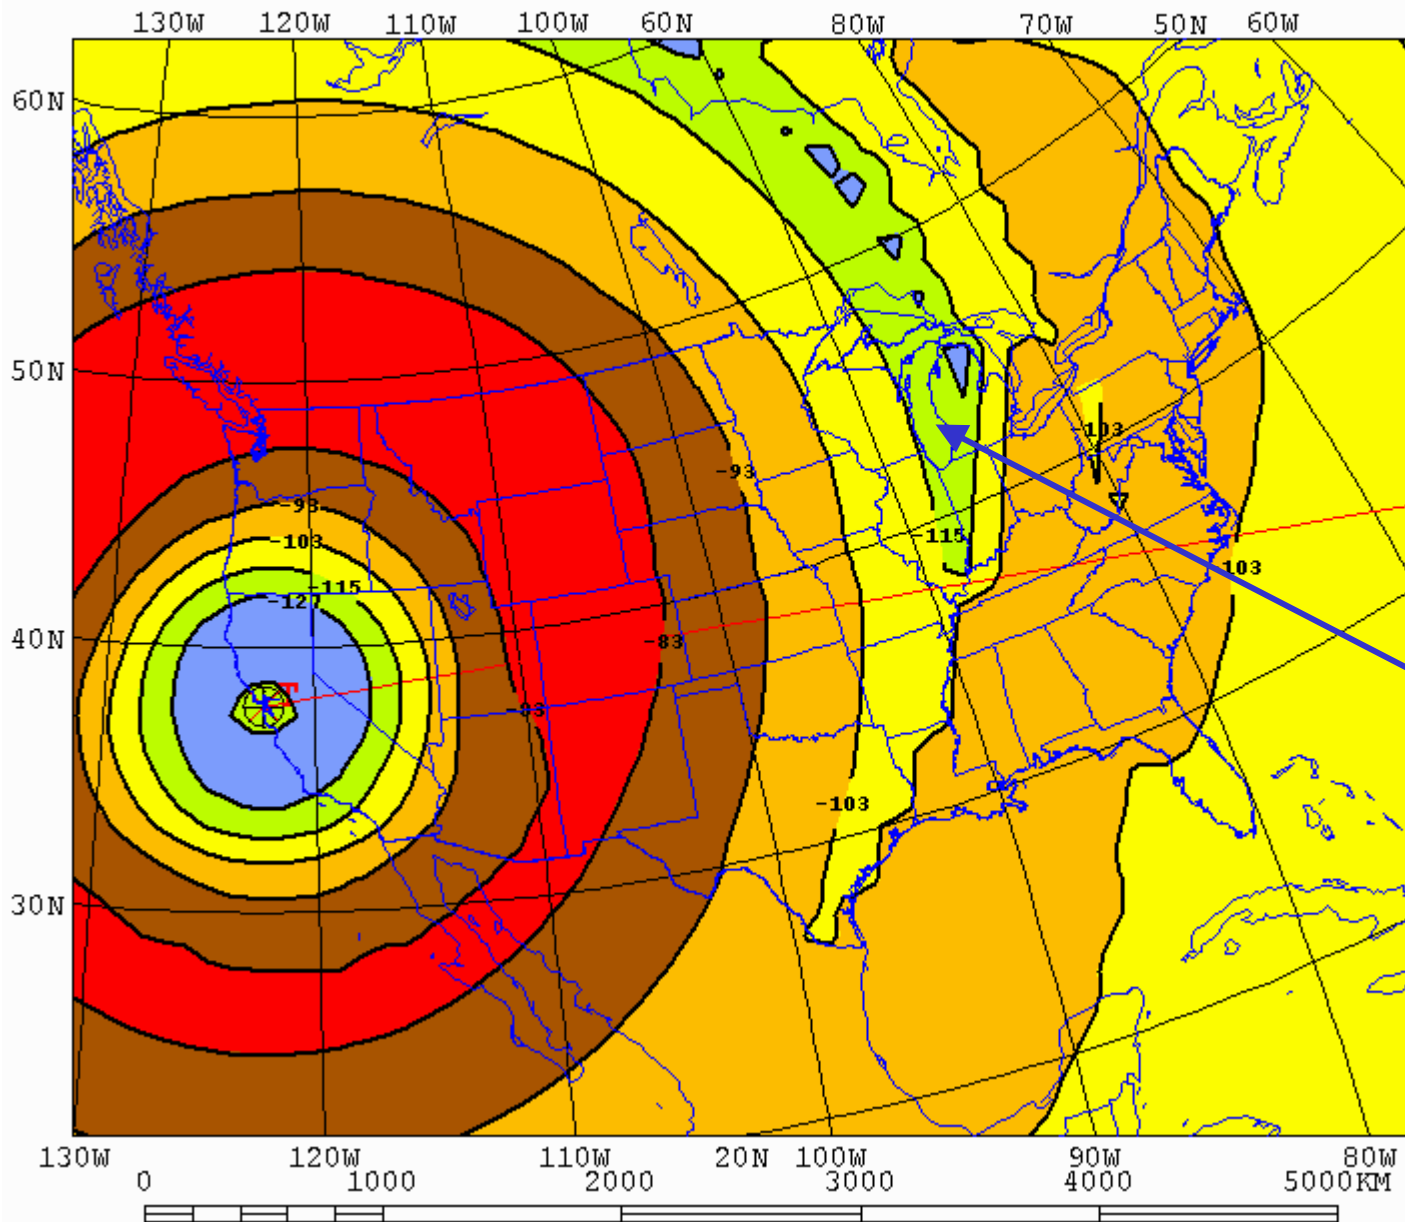

Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V12

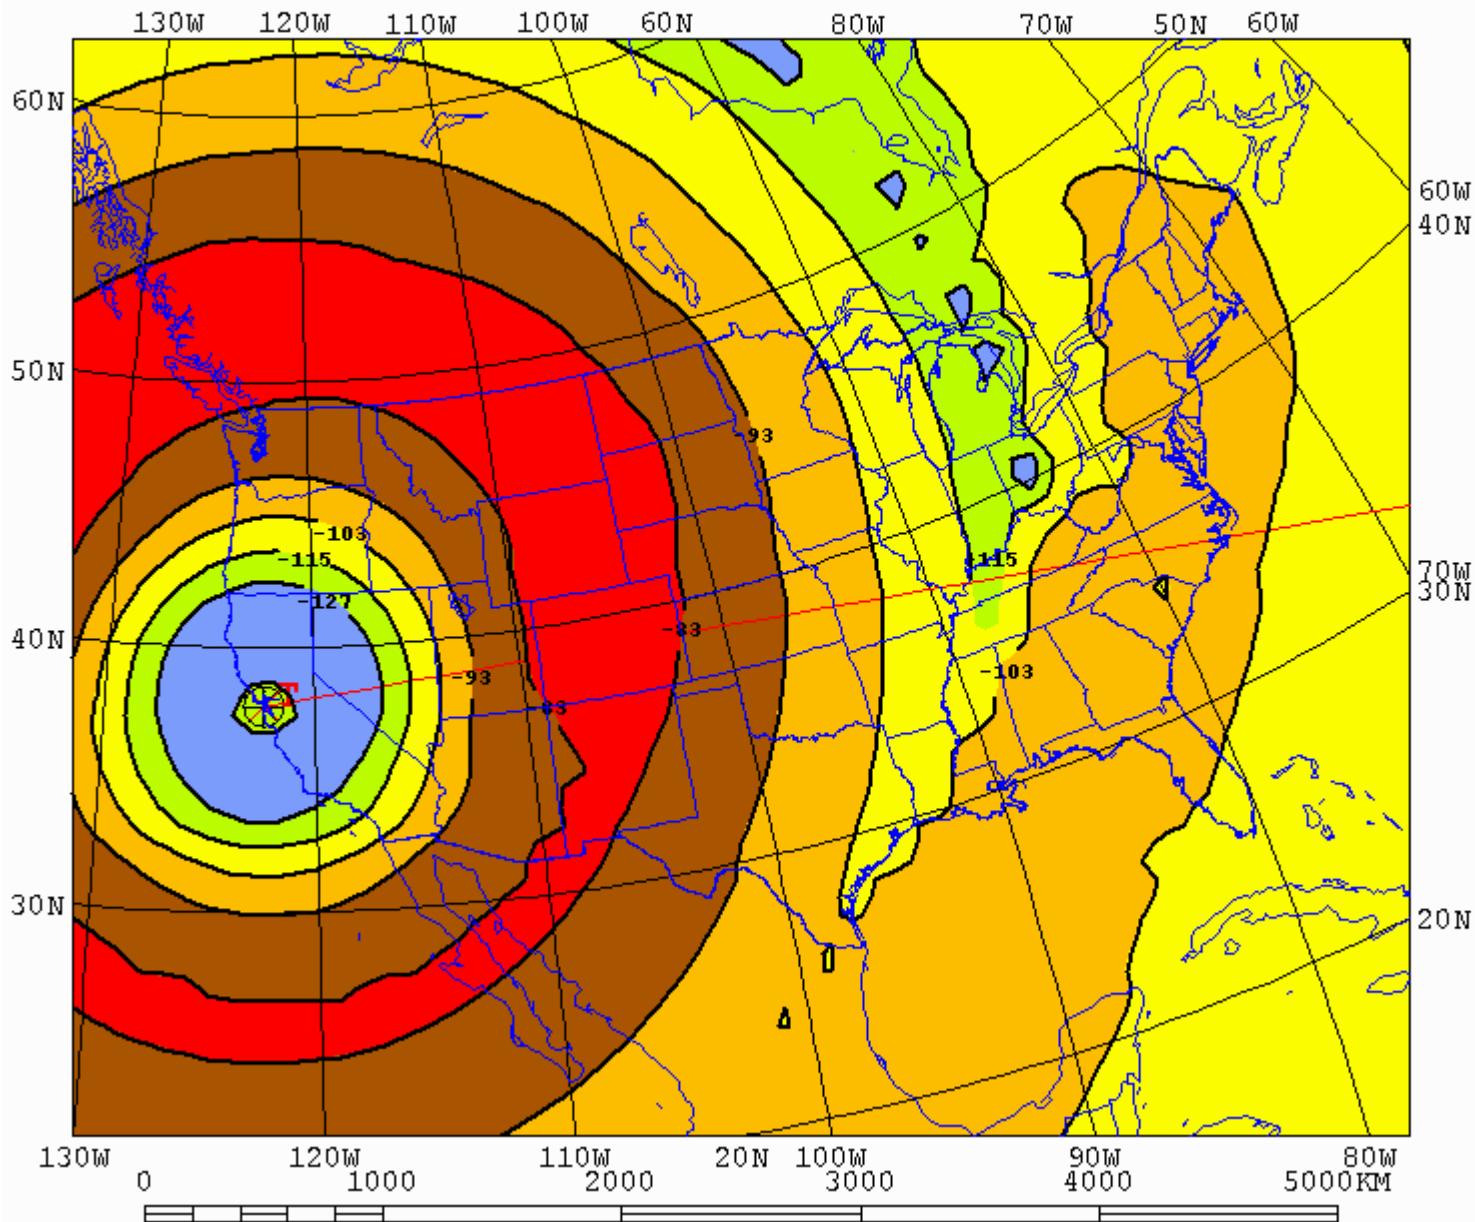


2005: 47 Qs

CCIR coefficients
40x 40 gridsize

Midwest
hole widens


Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V13

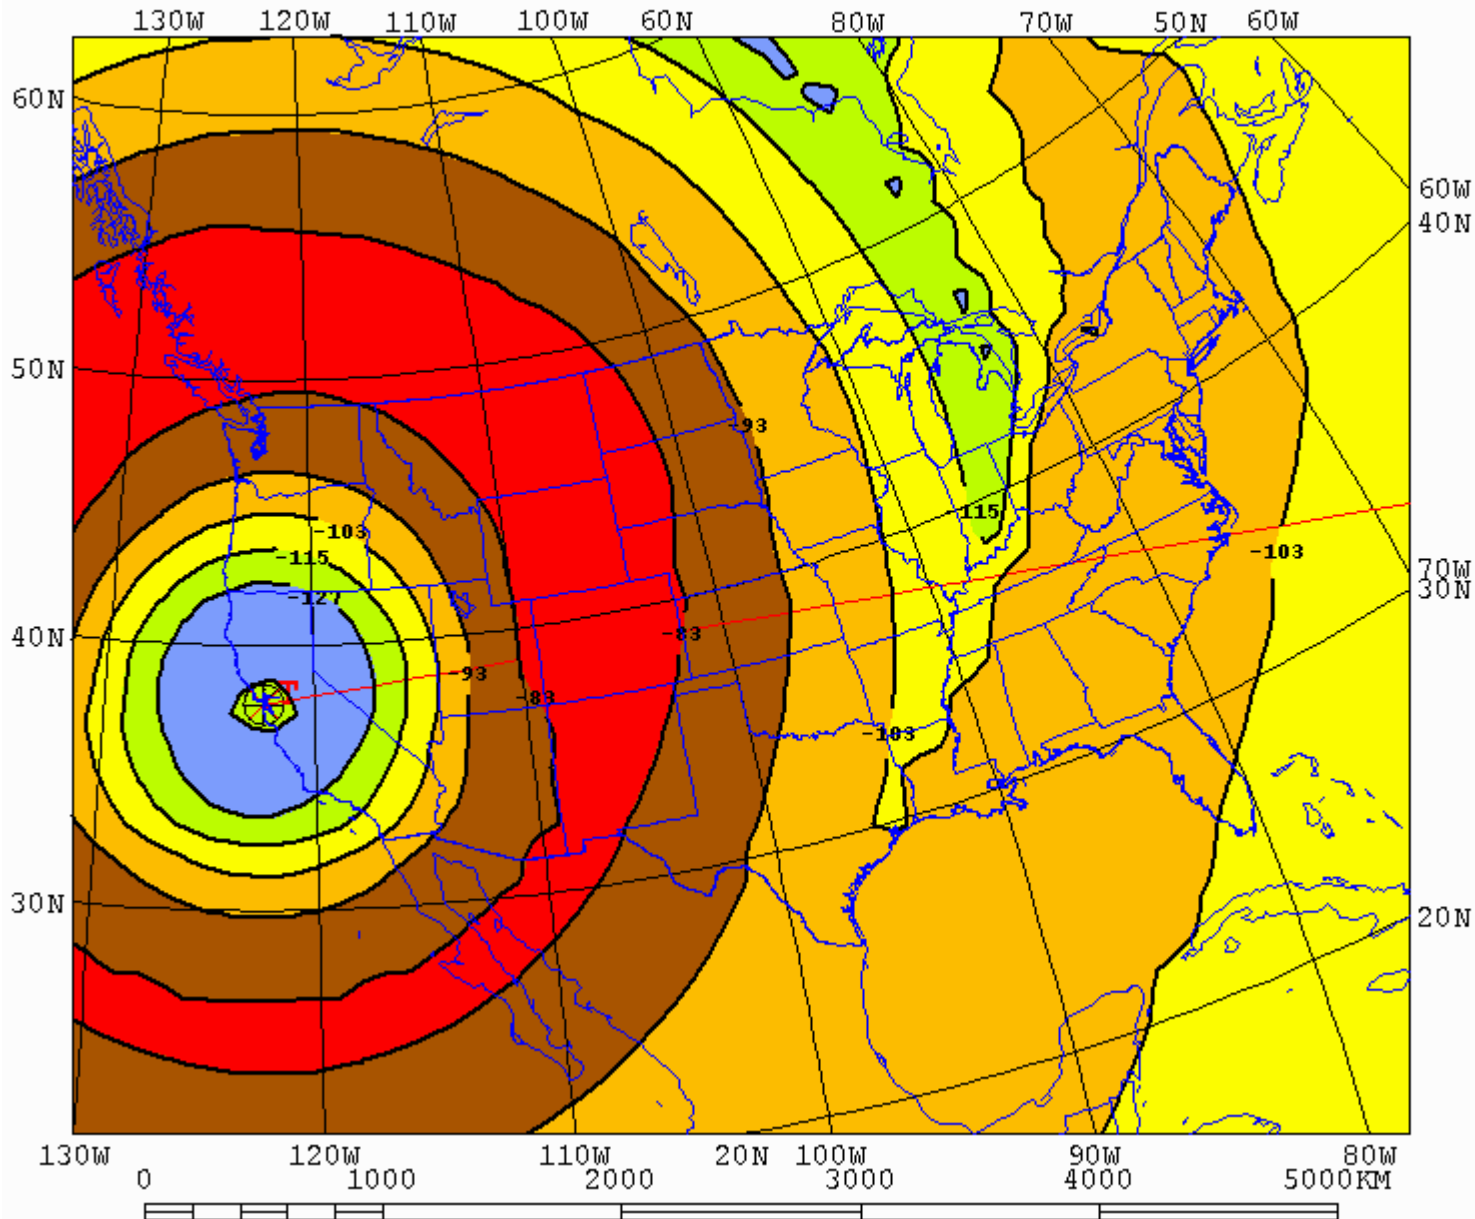


Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V14

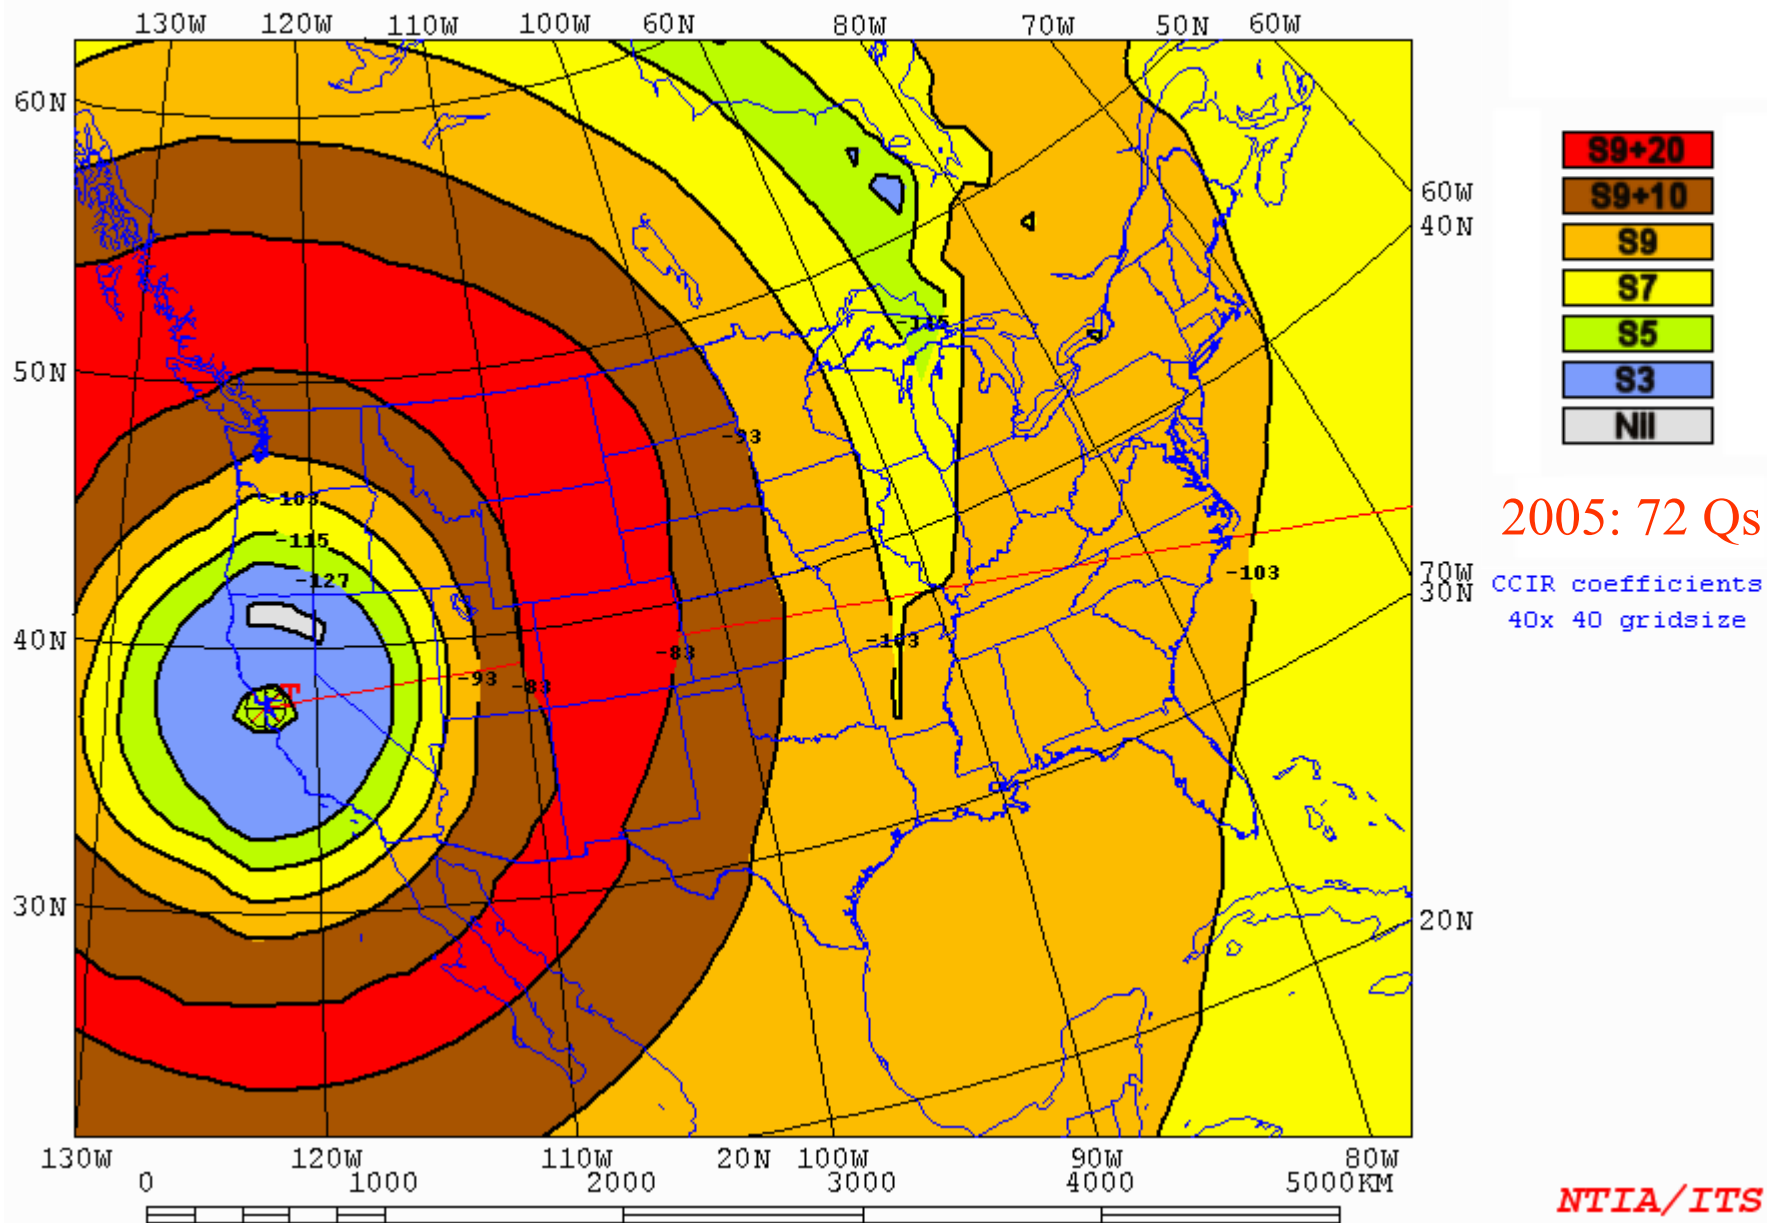


Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V15

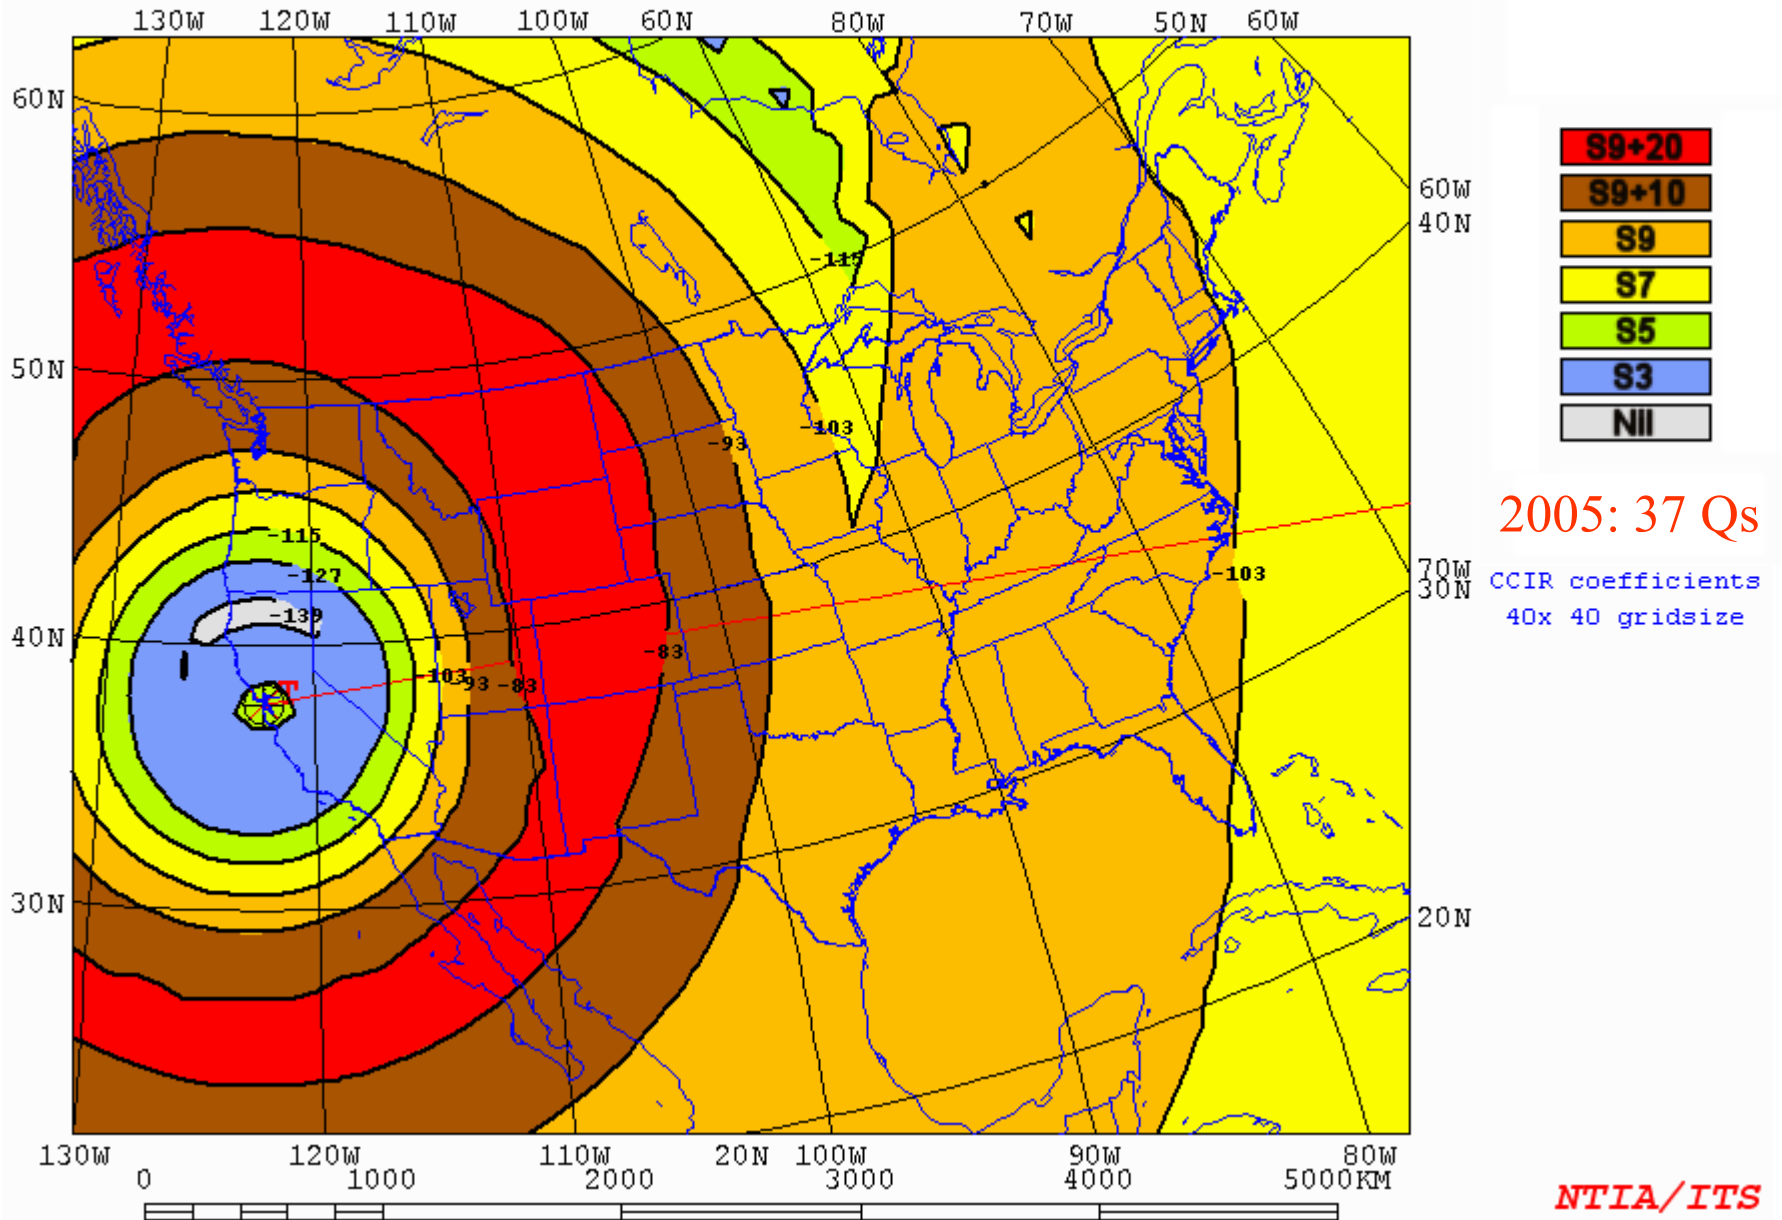


Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V16

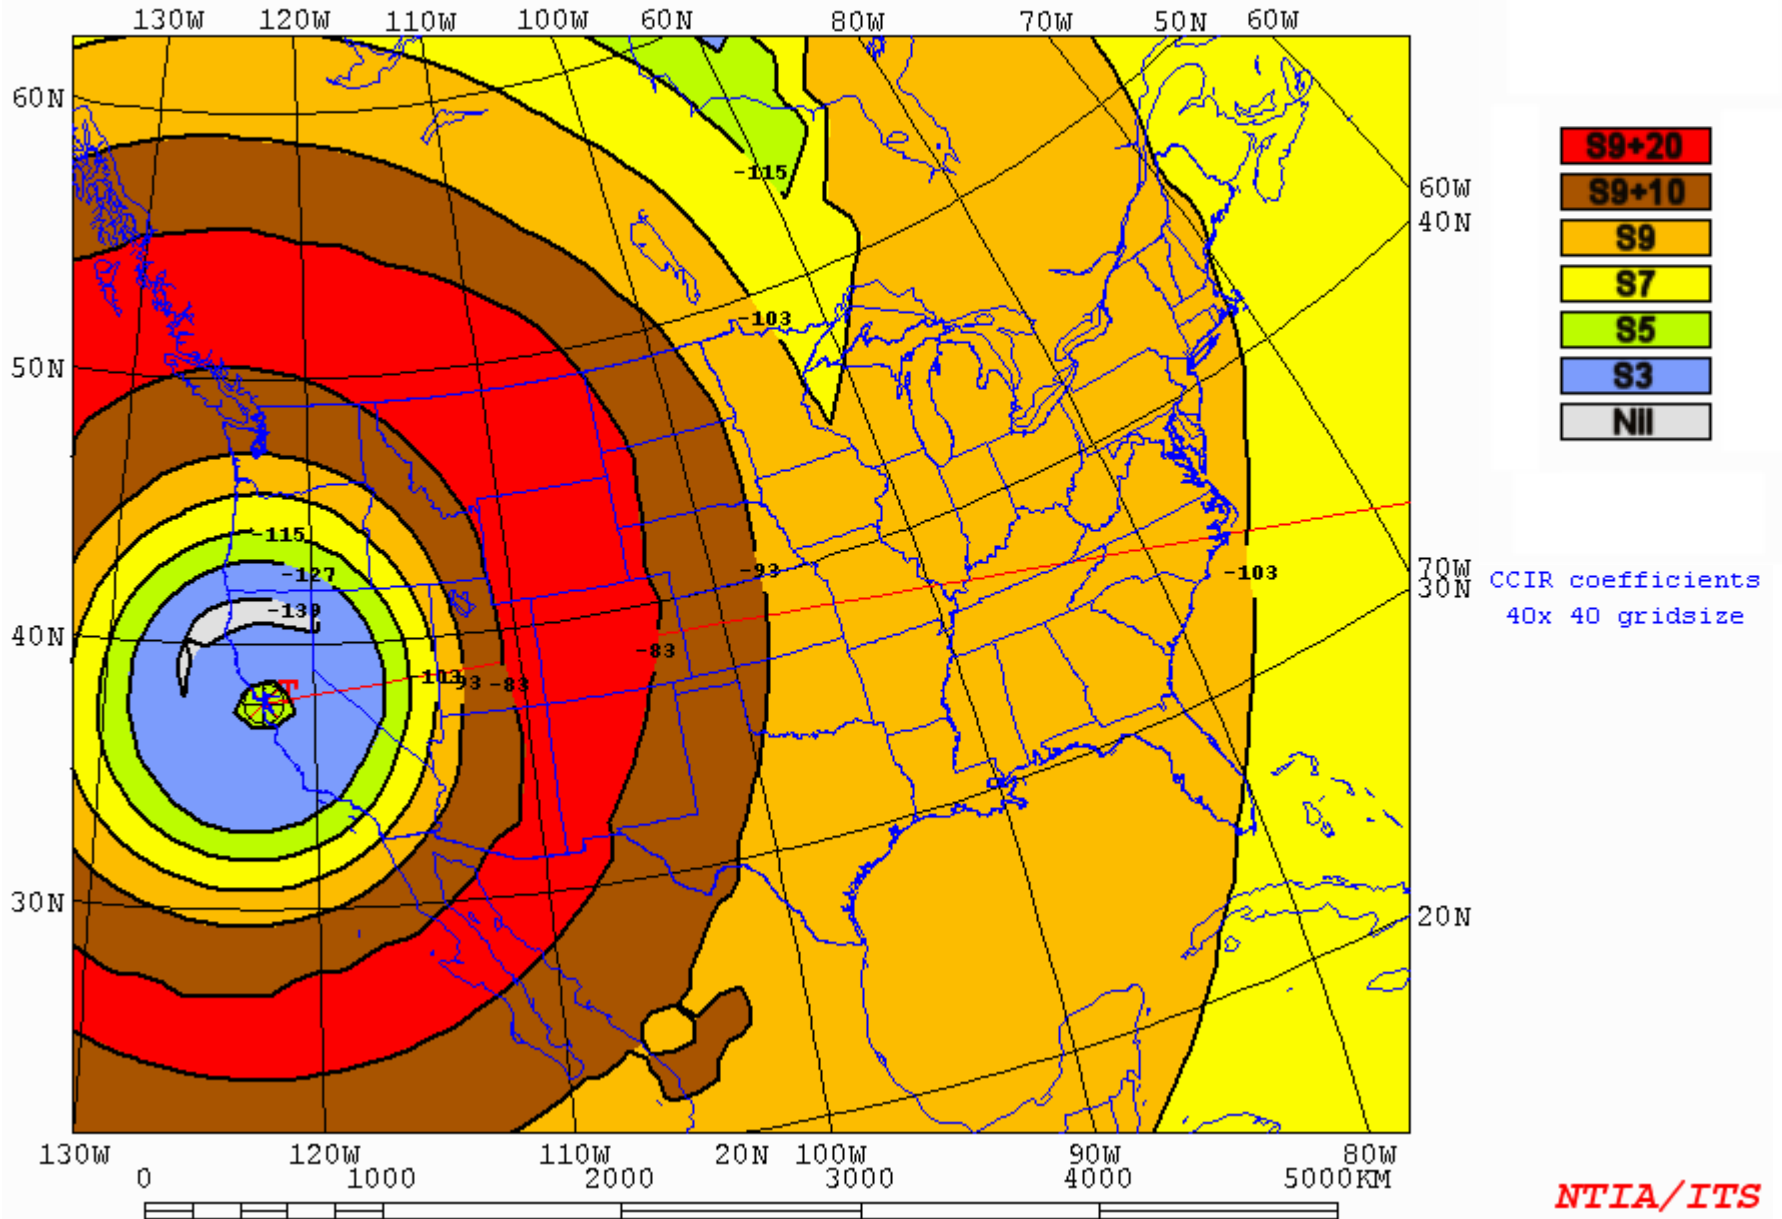


Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V17

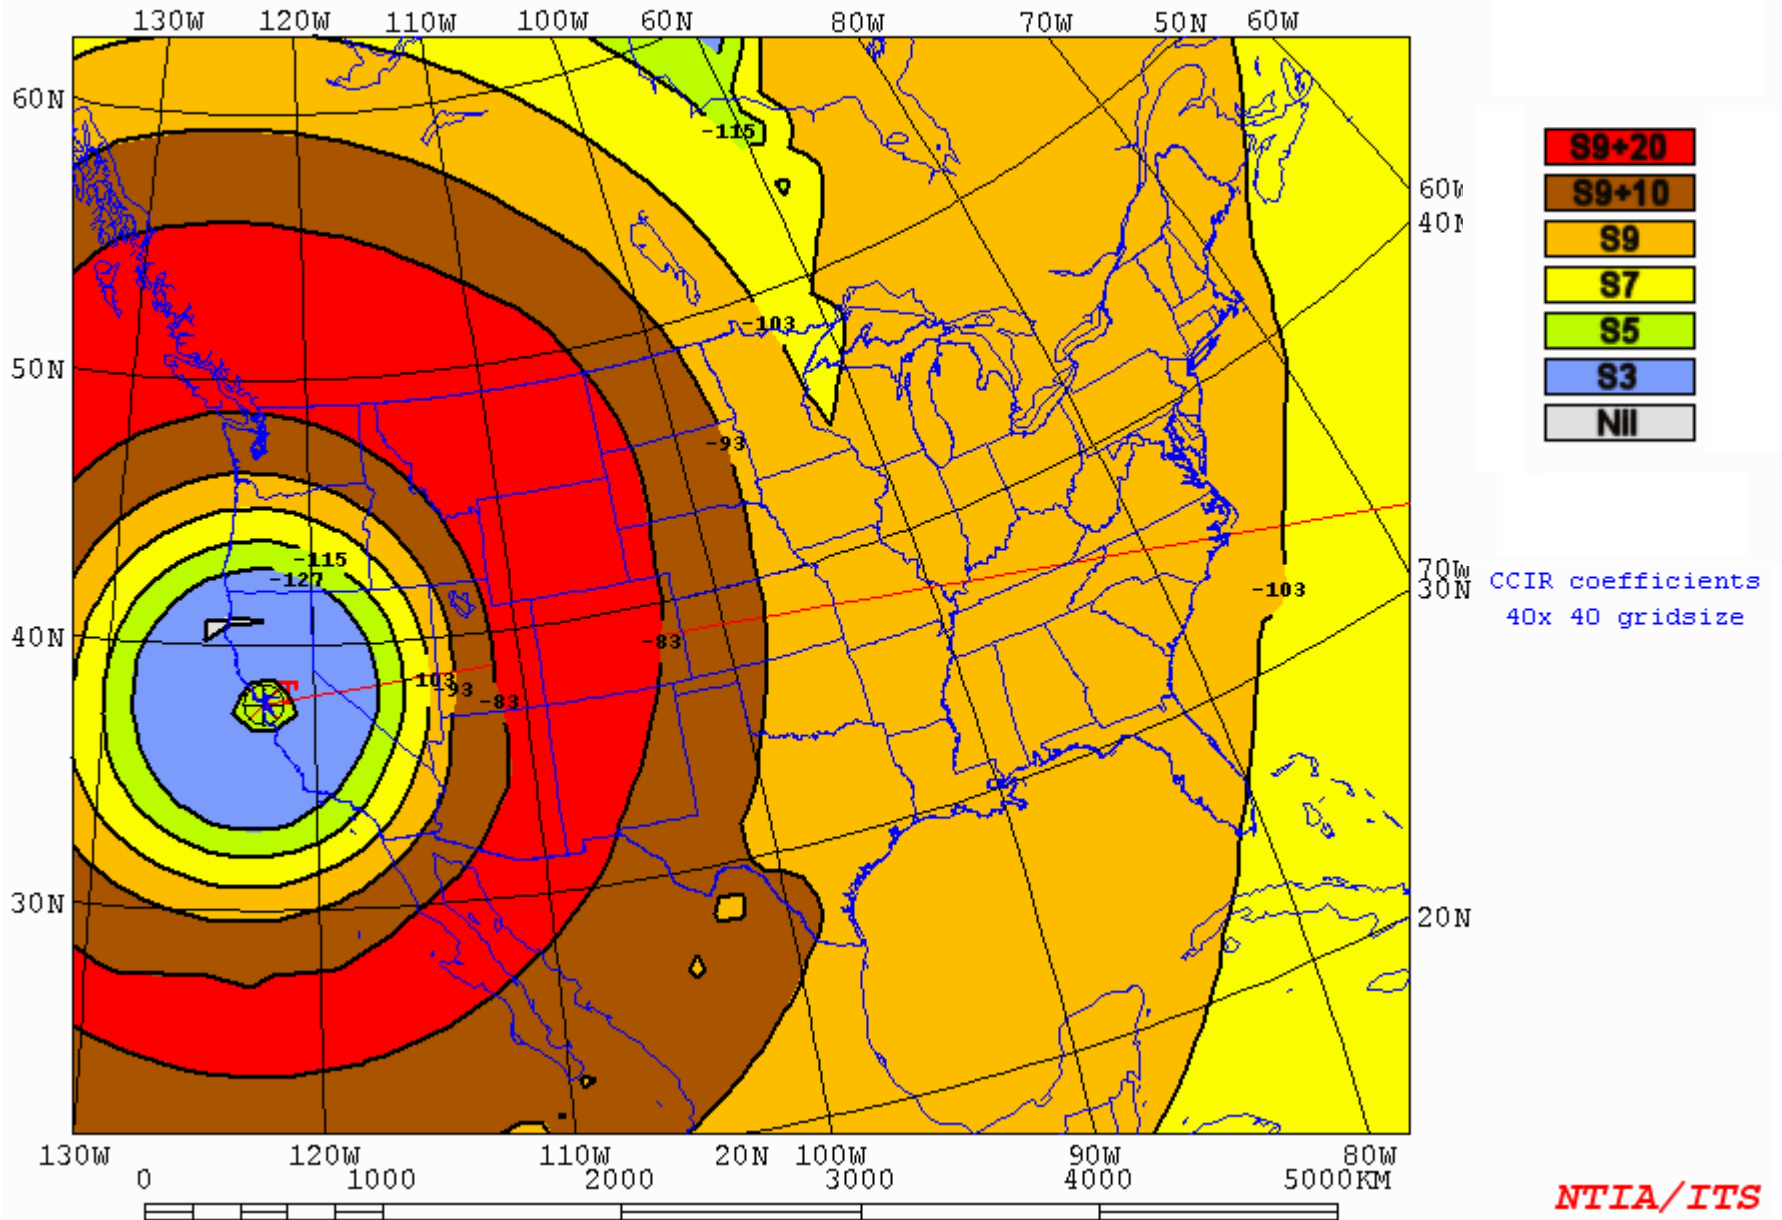


Tx location to grid of Rx

AREADATA\DEFAULT\SF7A.V18

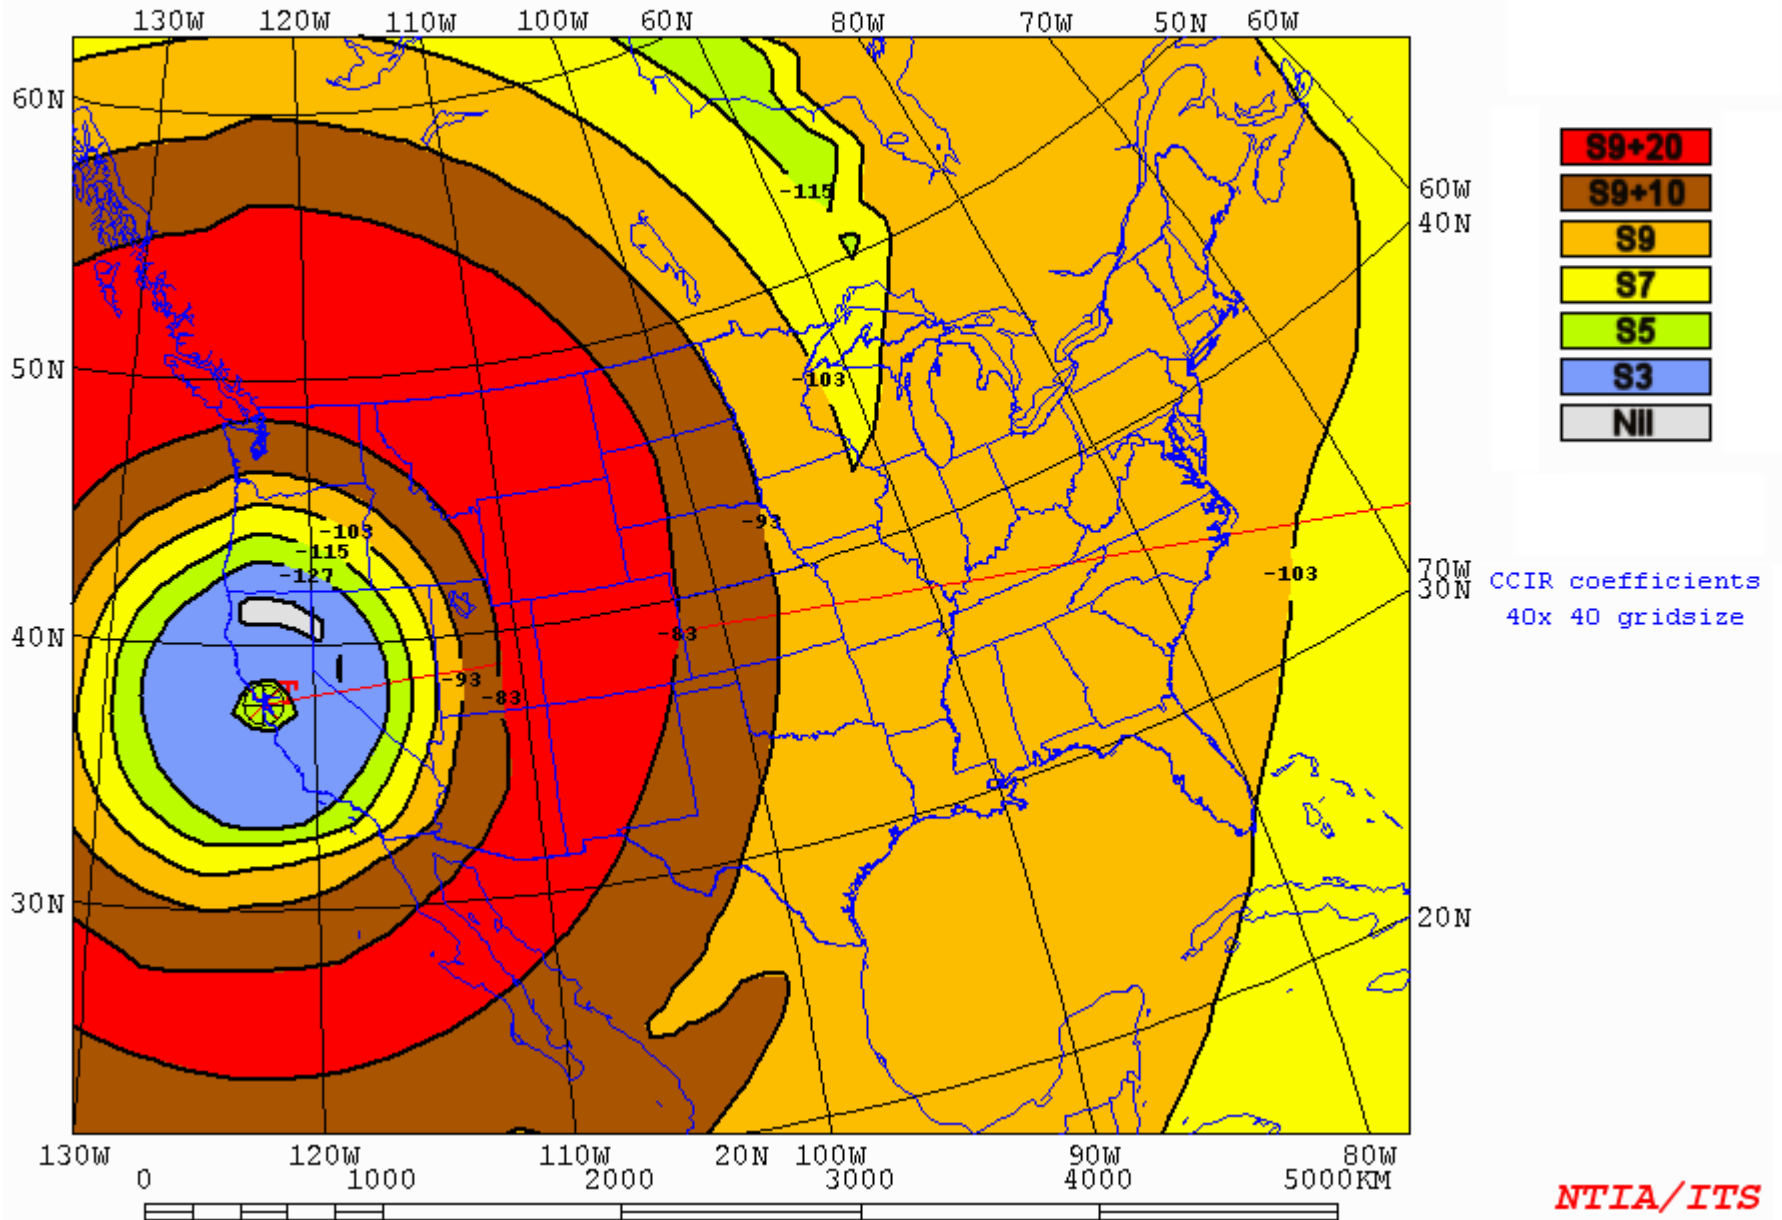


Tx location to grid of Rx

AREADATA\default\sf7b.V11

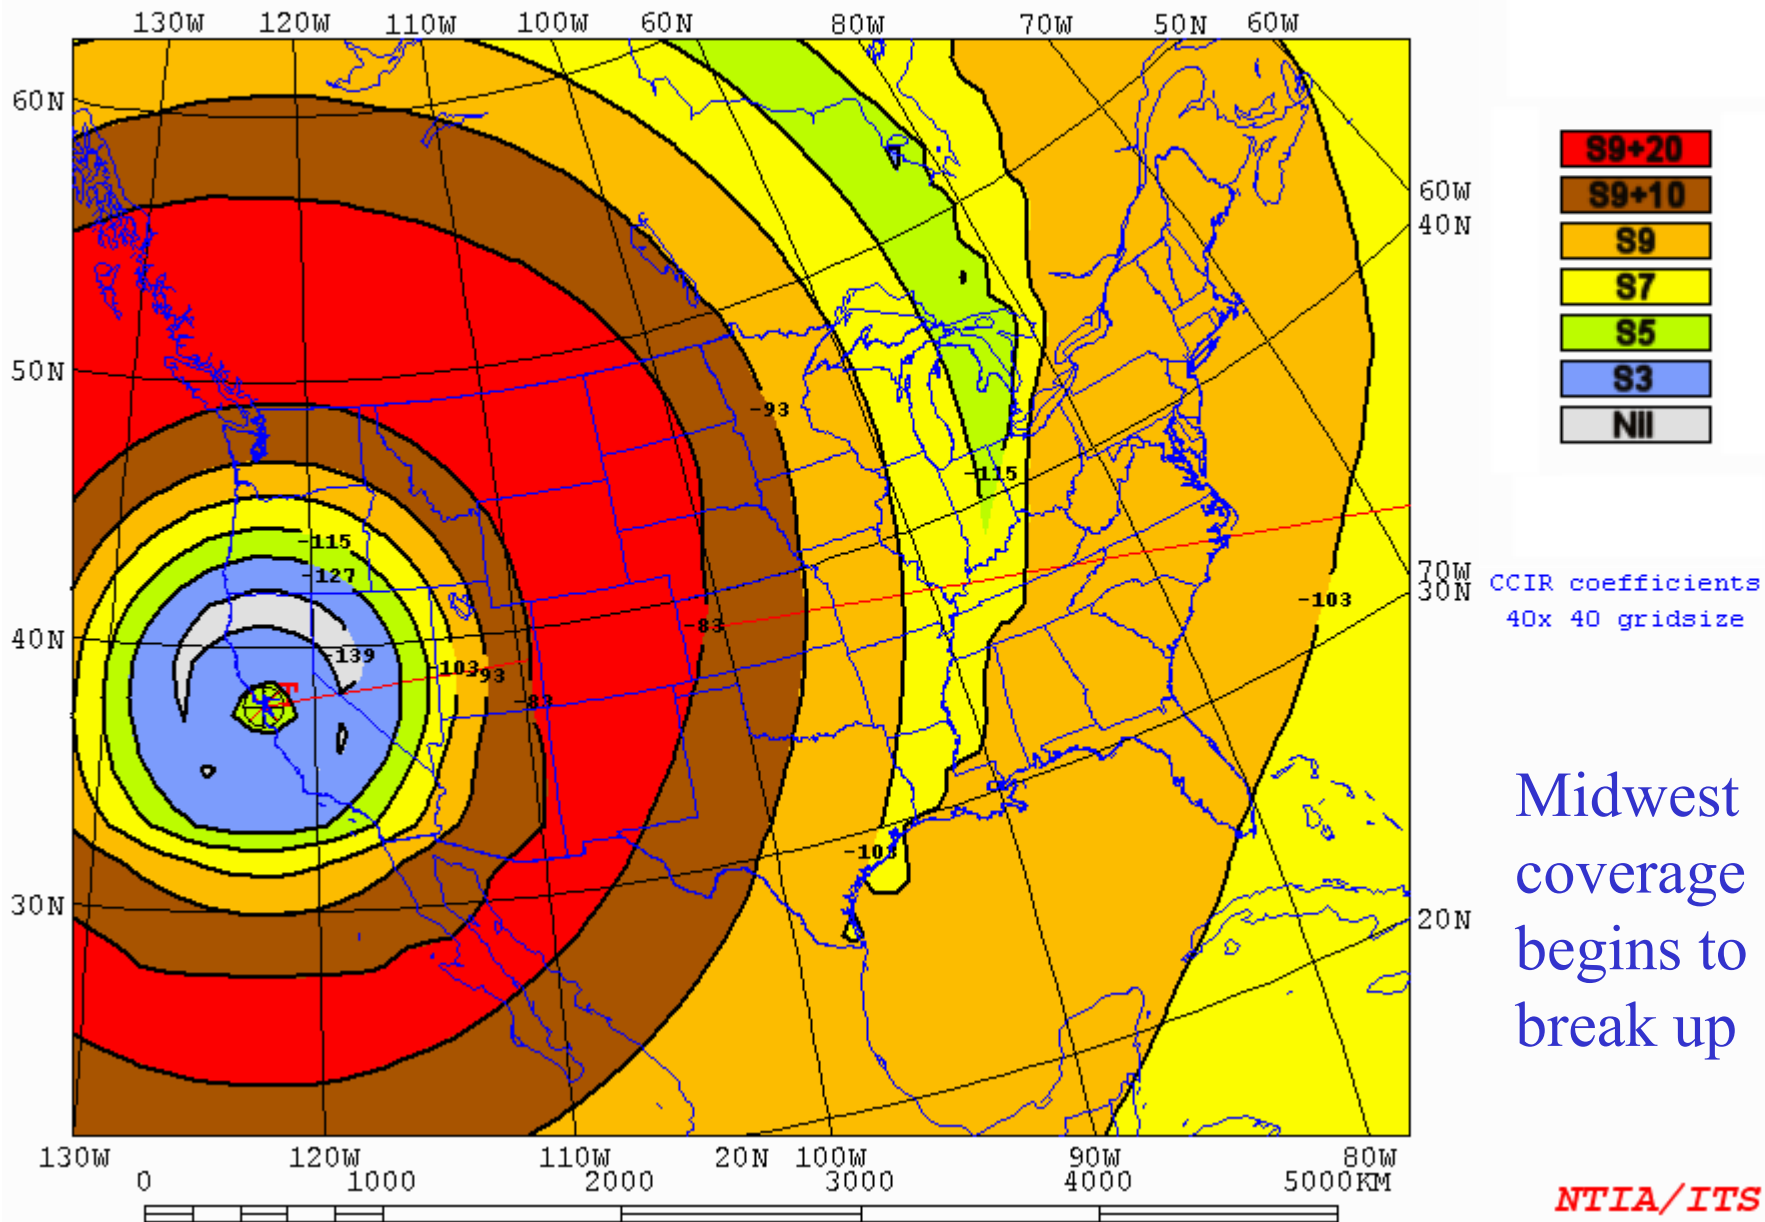

Tx location to grid of Rx

AREADATA\default\sf7b.V12

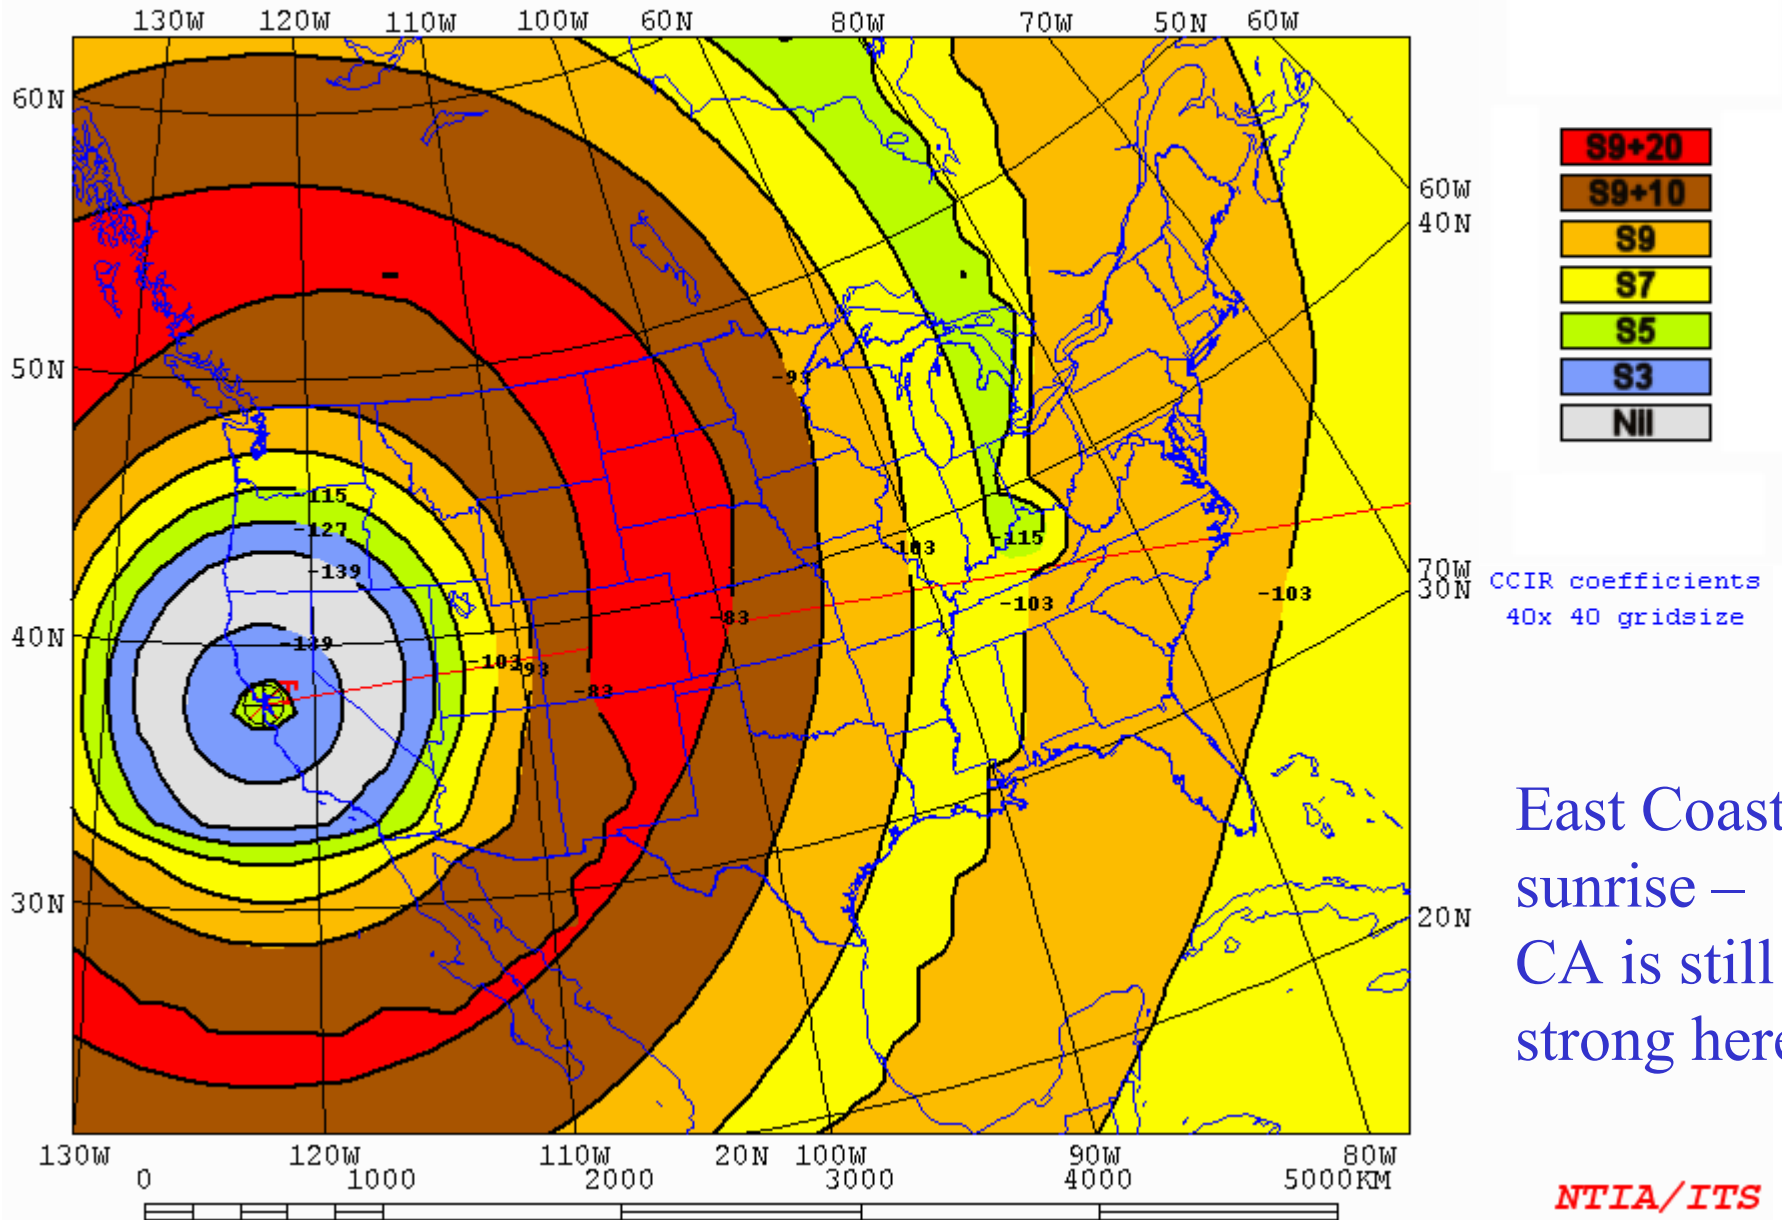



20-Meter Coverage


- 20 is usually a zoo on phone, particularly during low part of Solar Cycle, when 15 and 10 meters are marginal or non-existent.
- Big stacks rule, although 1500 W and a 3-element Yagi can easily run rate.
- Moral of this story: Run QRO if you possibly can, with big antennas!

CHICAGO [3-el Yagi] 1.5kW 80deg 22ut 14.200MHz Nov 10ssn

SDBW


Tx location to grid of Rx

AREADATA\DEFAULT\CHIC14.V15

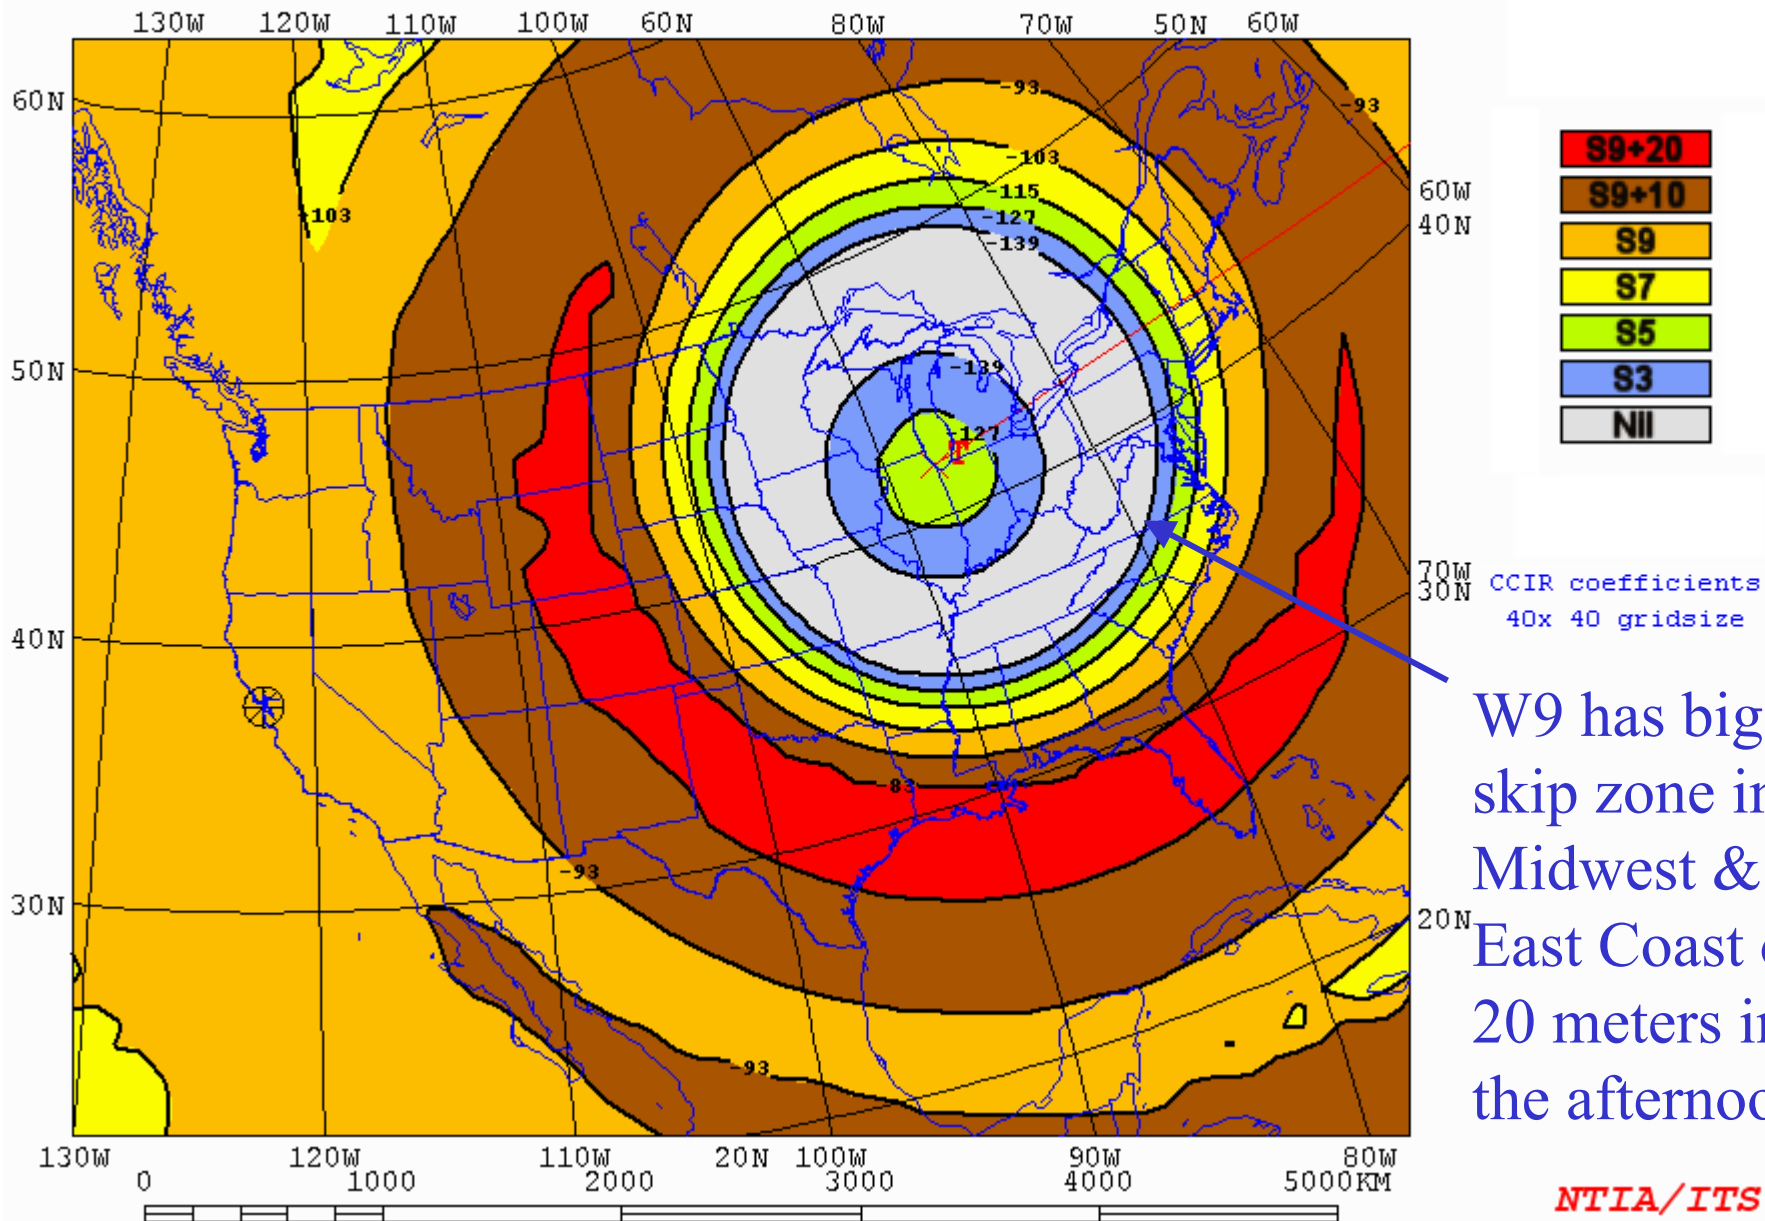


Tx location to grid of Rx

AREADATA\DEFAULT\WASH14.V15

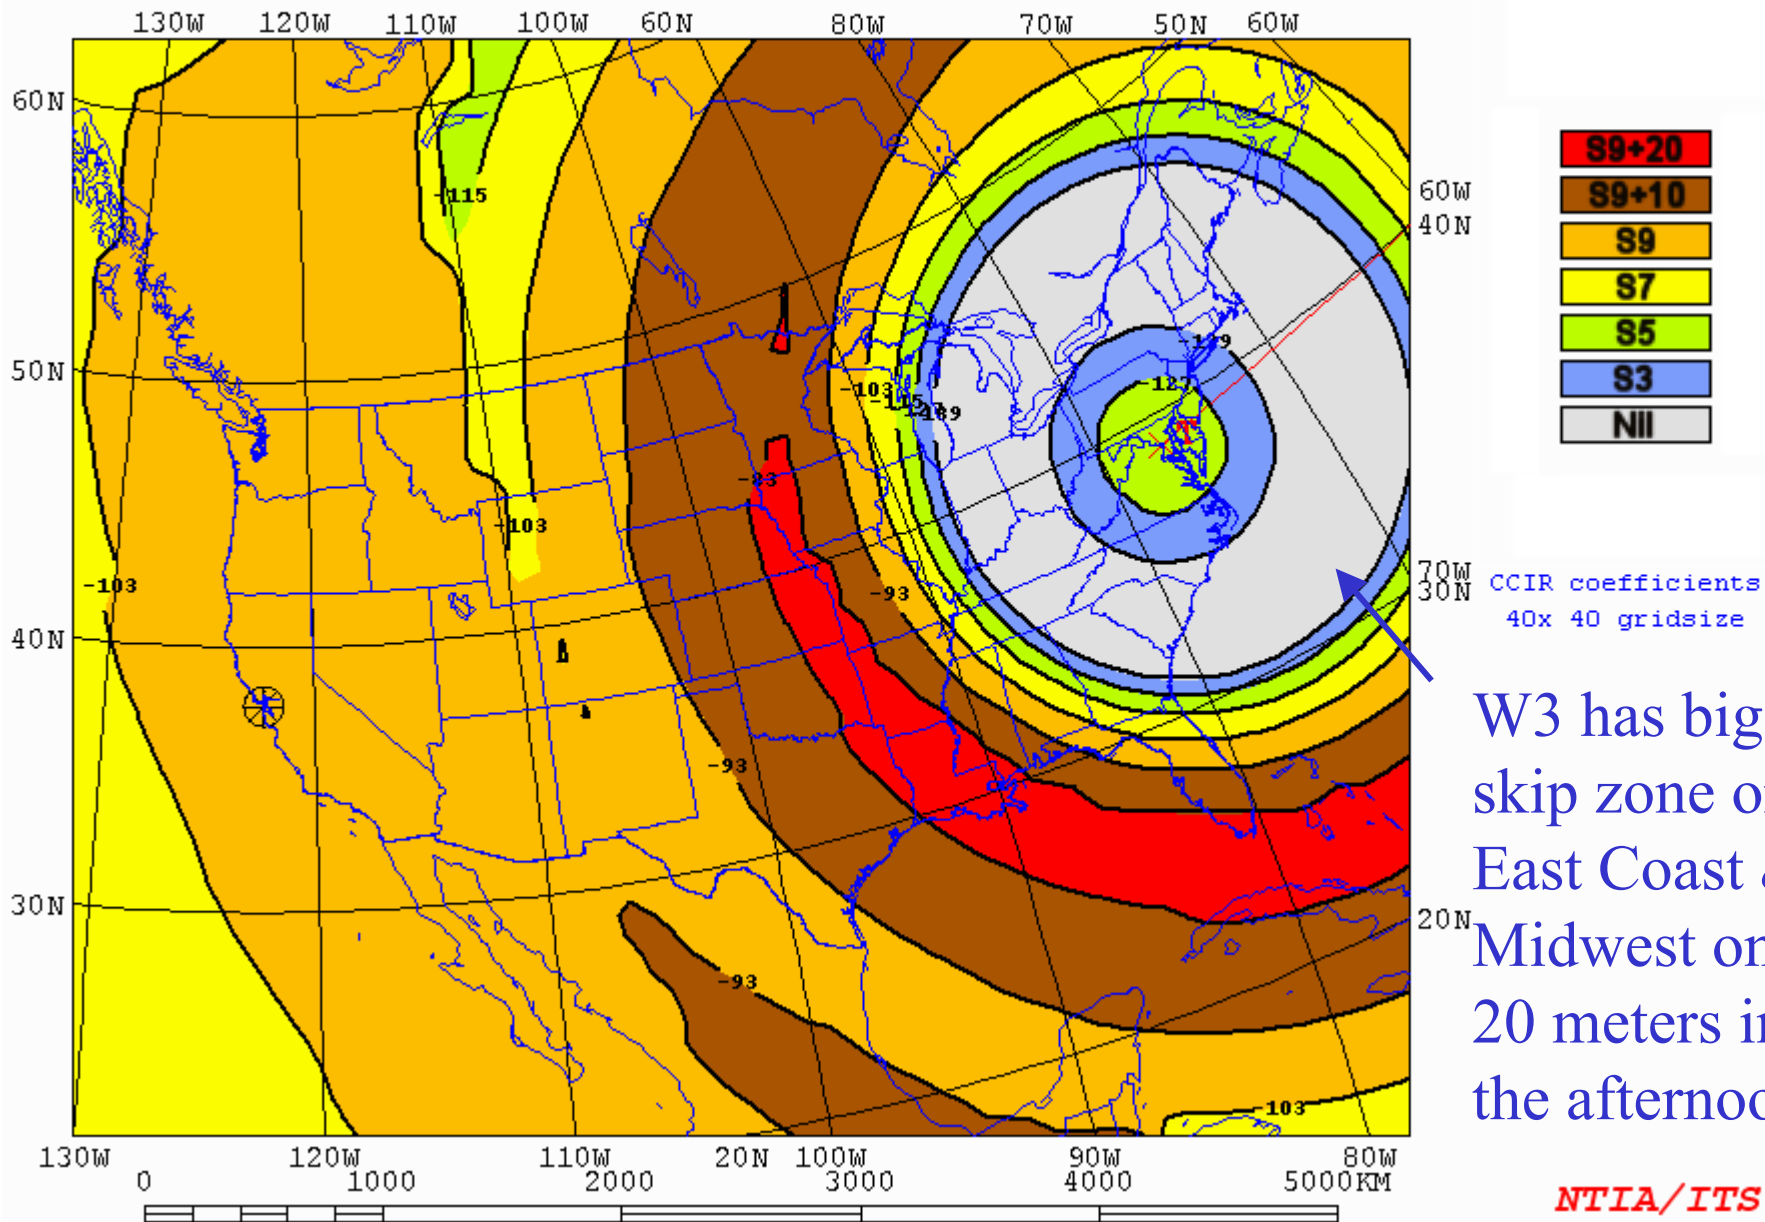

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V15

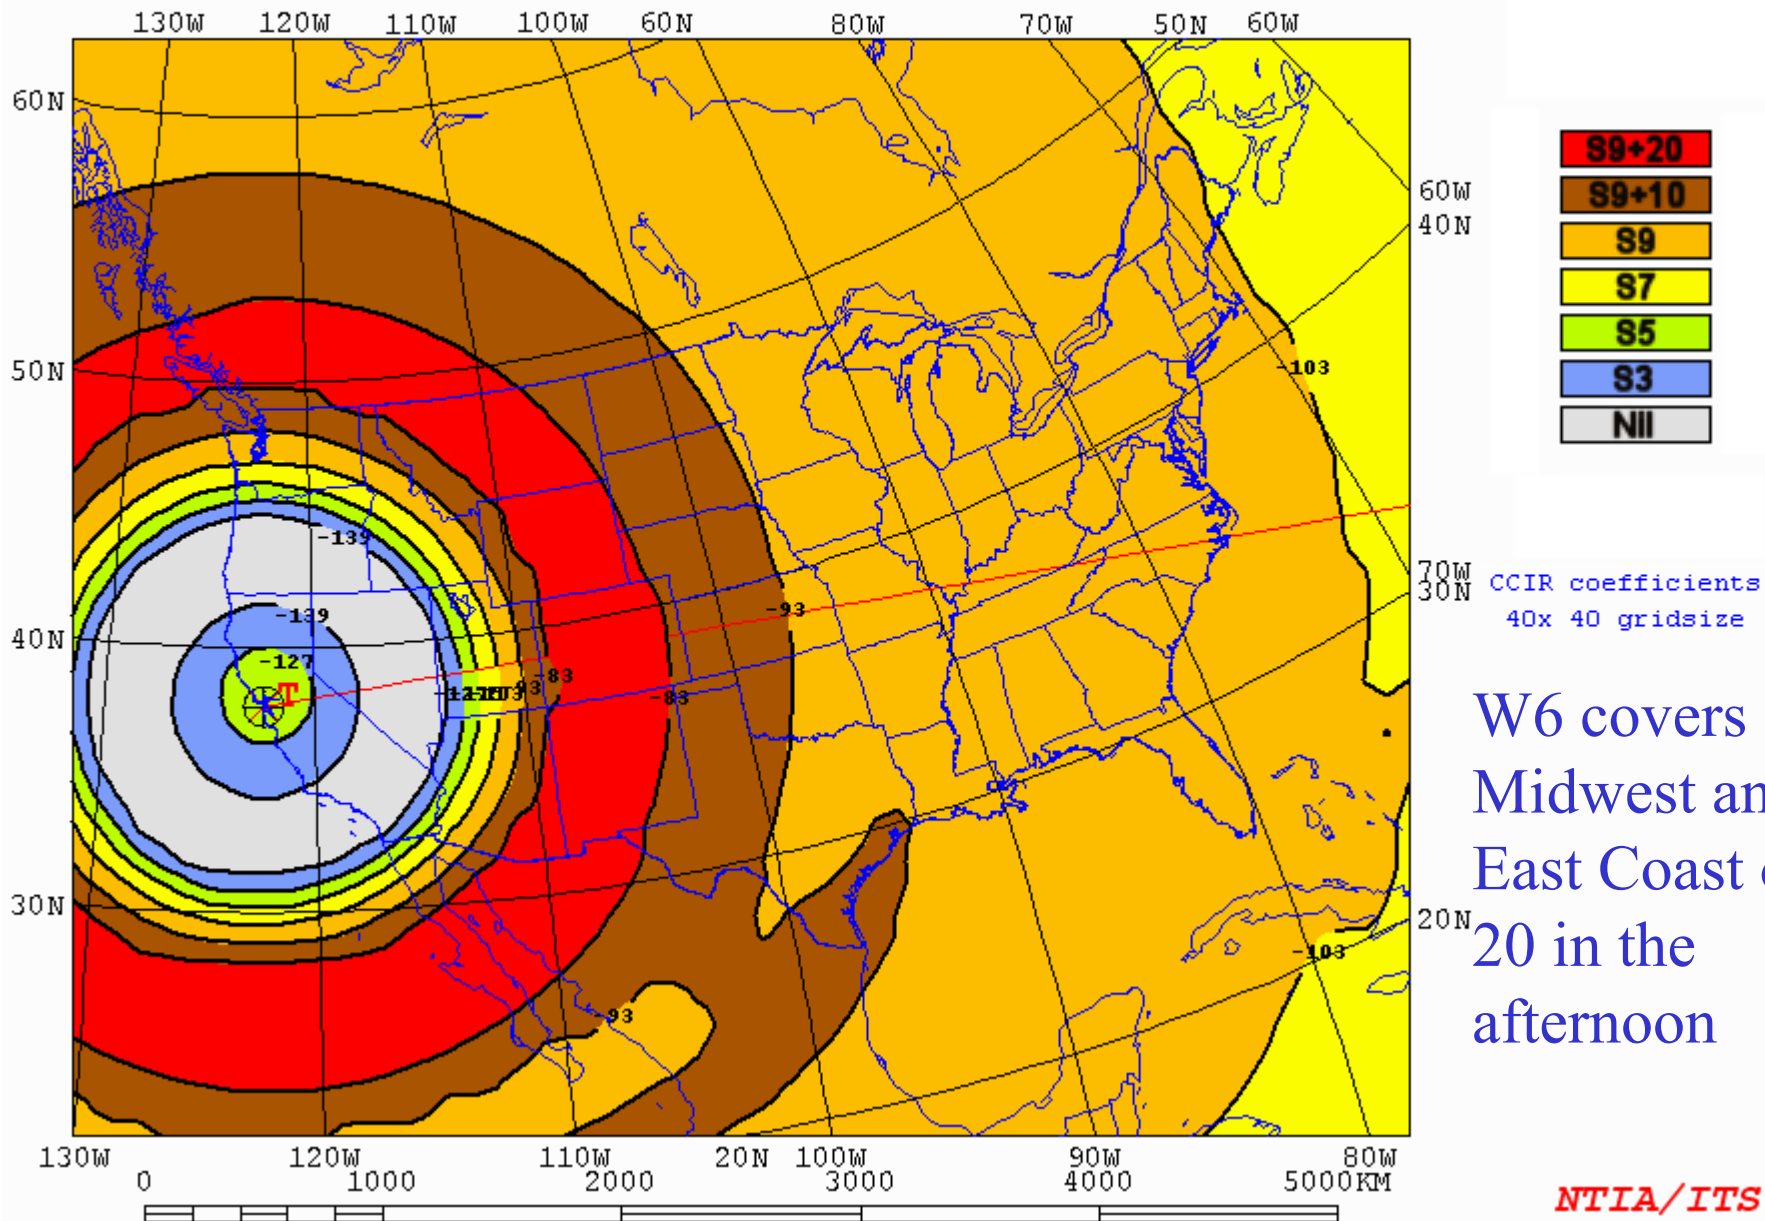

W6 covers
Midwest and
East Coast on
20 in the
afternoon



20-Meter Movie Sequence


- From 13 UTC to 02 UTC (W6 sunrise to evening)
- Assumes 3-element Yagis at 55 feet.
- Assumes 1500 W.

SAN FRANCISCO [3-el Yagi] 1.5kW 80deg 13ut 14.200MHz Nov 10ssn

SDBW

Tx location to grid of Rx

AREADATA\DEFAULT\SF14A.V12

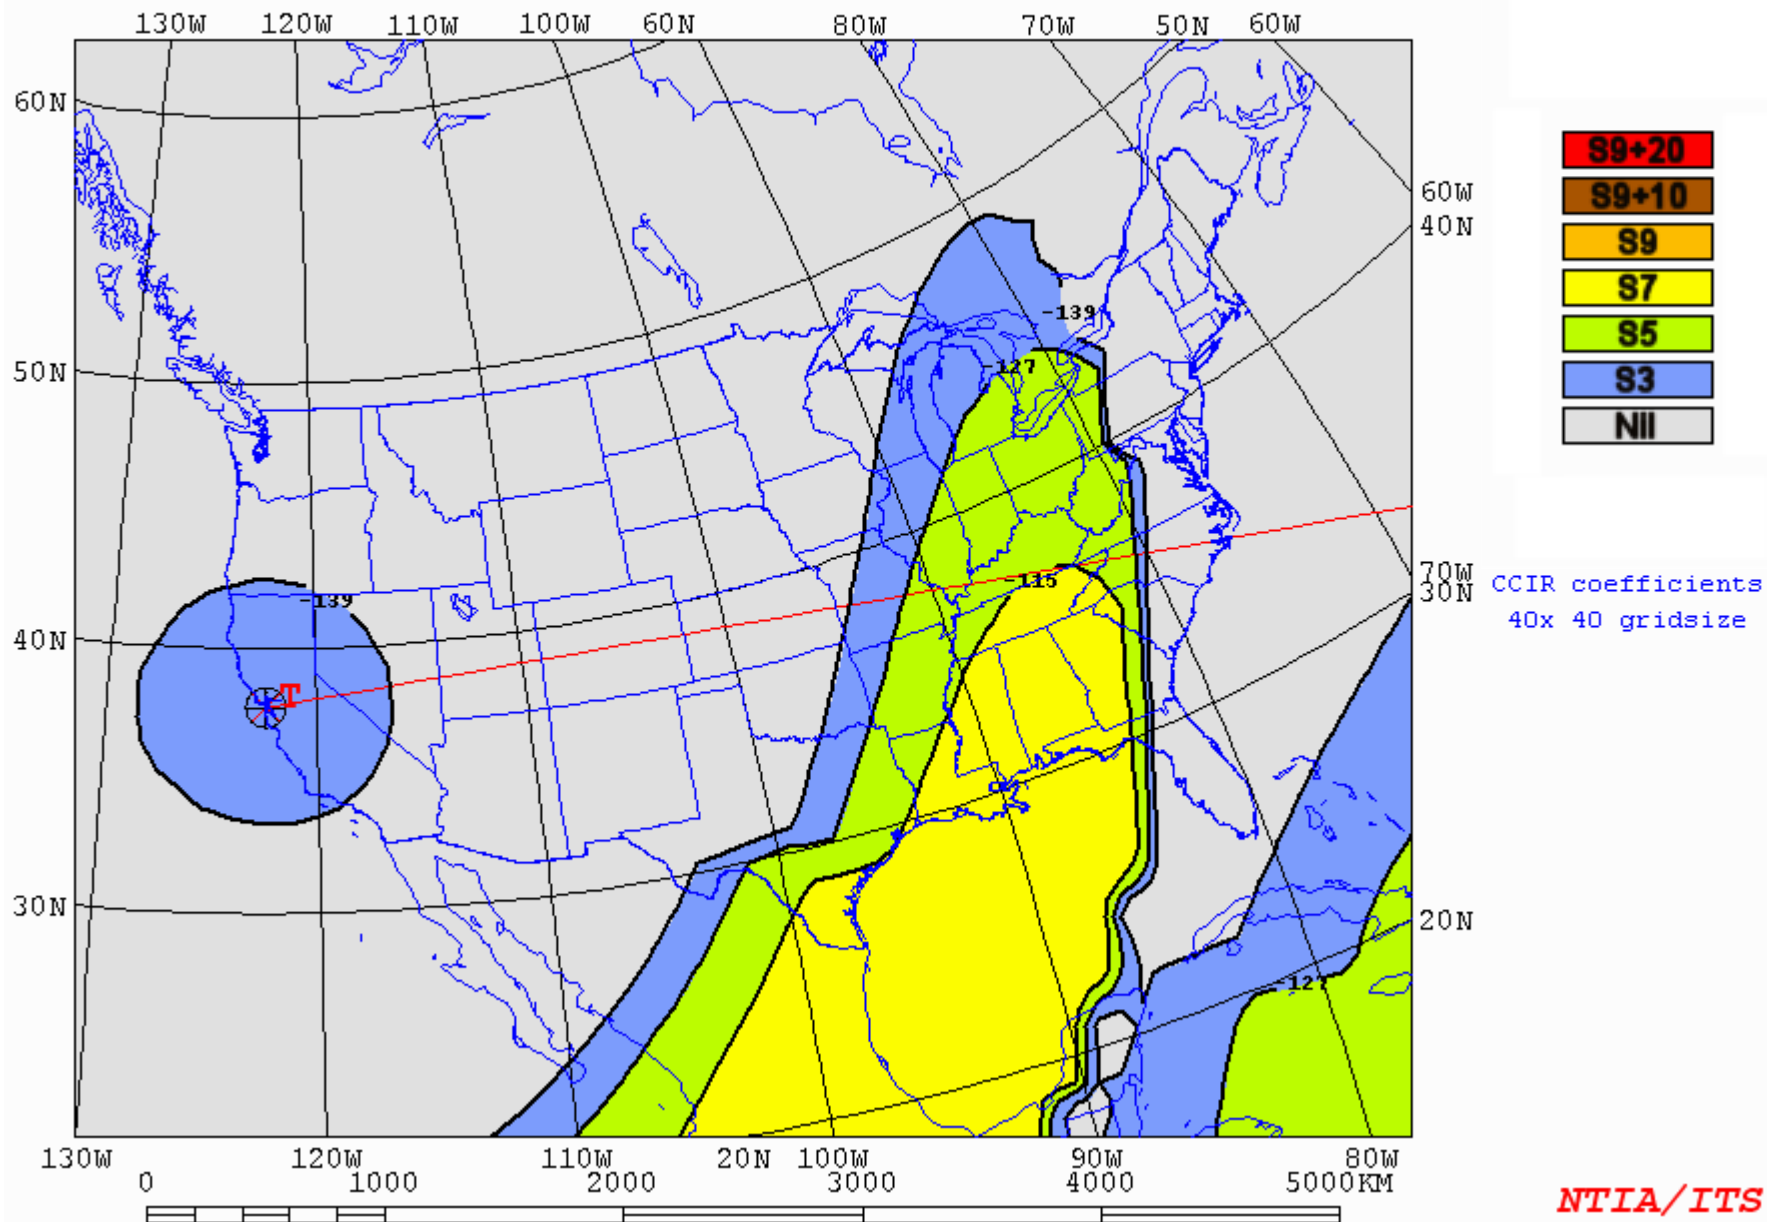


SAN FRANCISCO [3-el Yagi] 1.5kW 80deg 14ut 14.200MHz Nov 10ssn

SDBW

Tx location to grid of Rx

AREADATA\DEFAULT\SF14A.V13

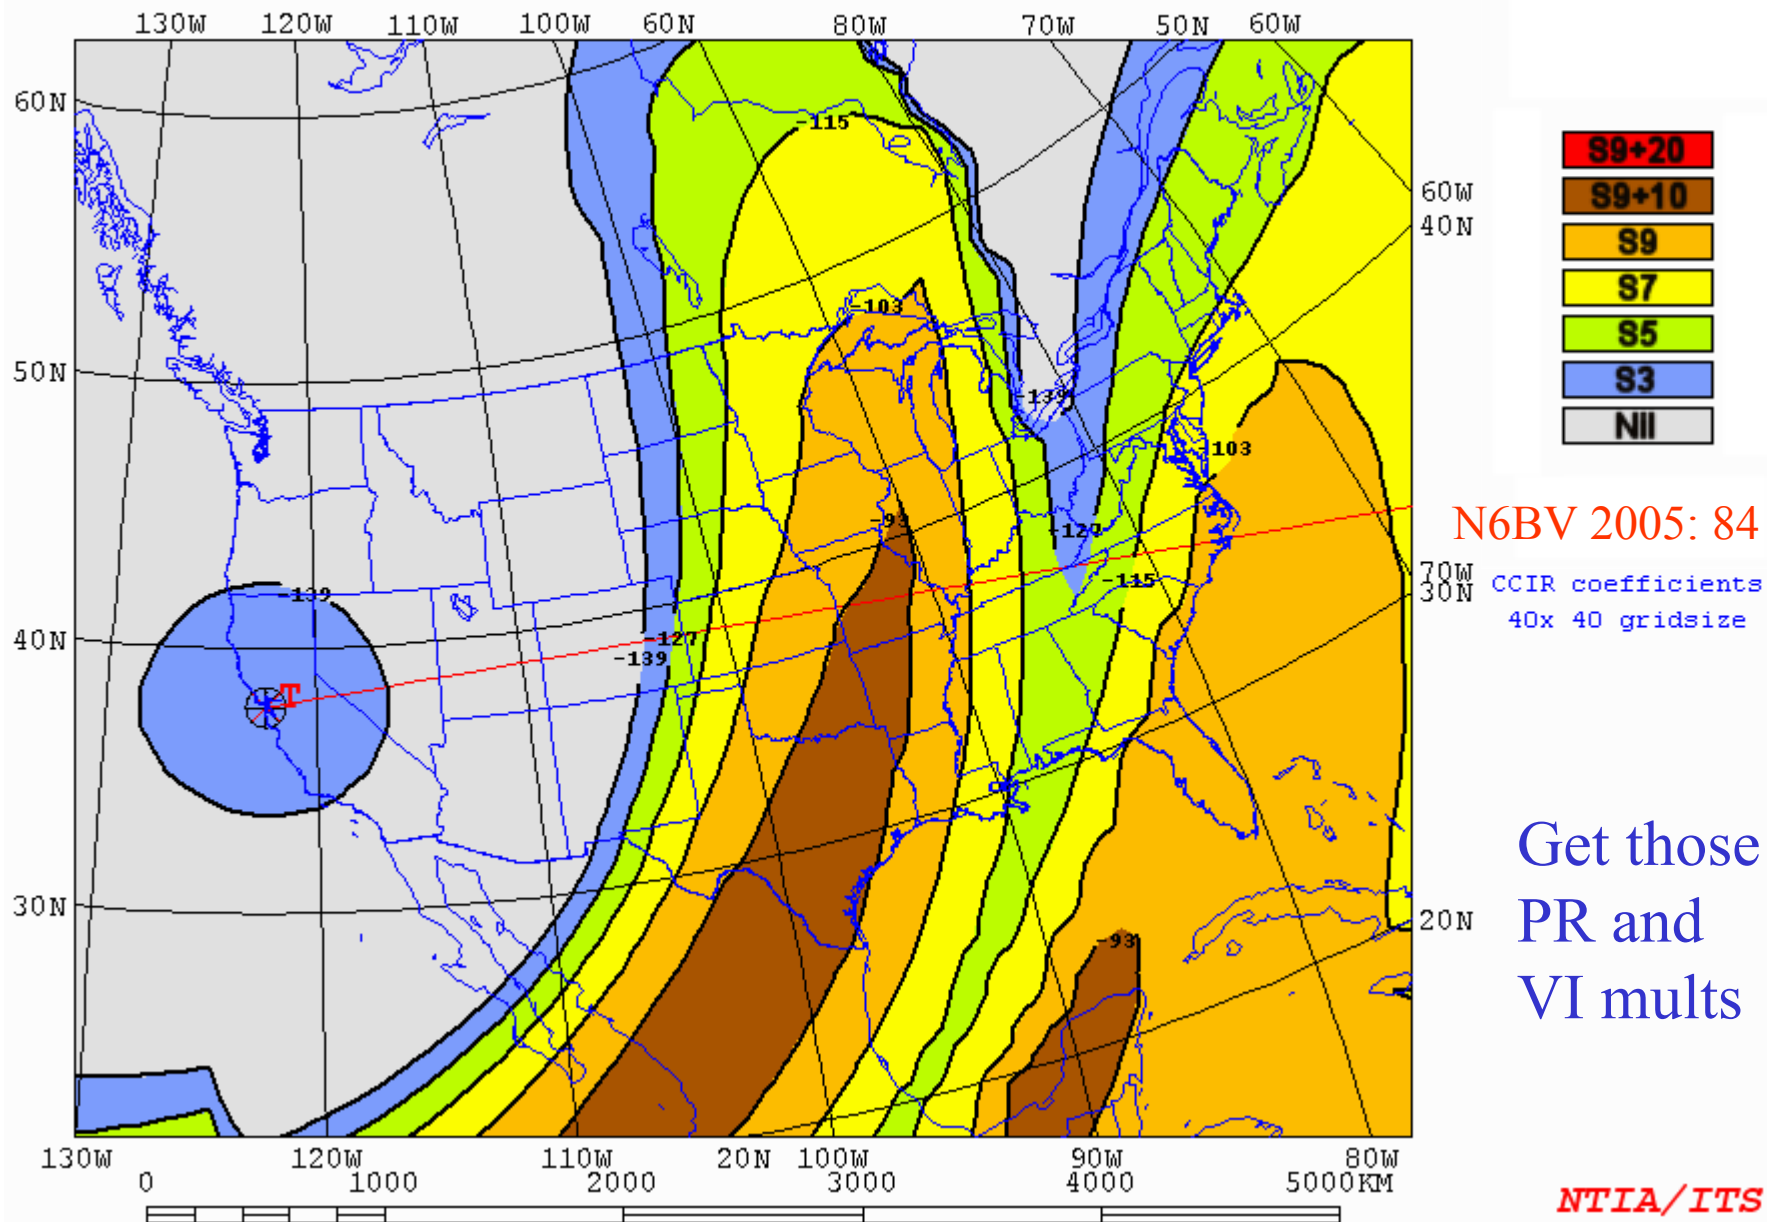


SAN FRANCISCO [3-el Yagi] 1.5kW 80deg 15ut 14.200MHz Nov 10ssn

SDBW


Tx location to grid of Rx

AREADATA\DEFAULT\SF14A.V14

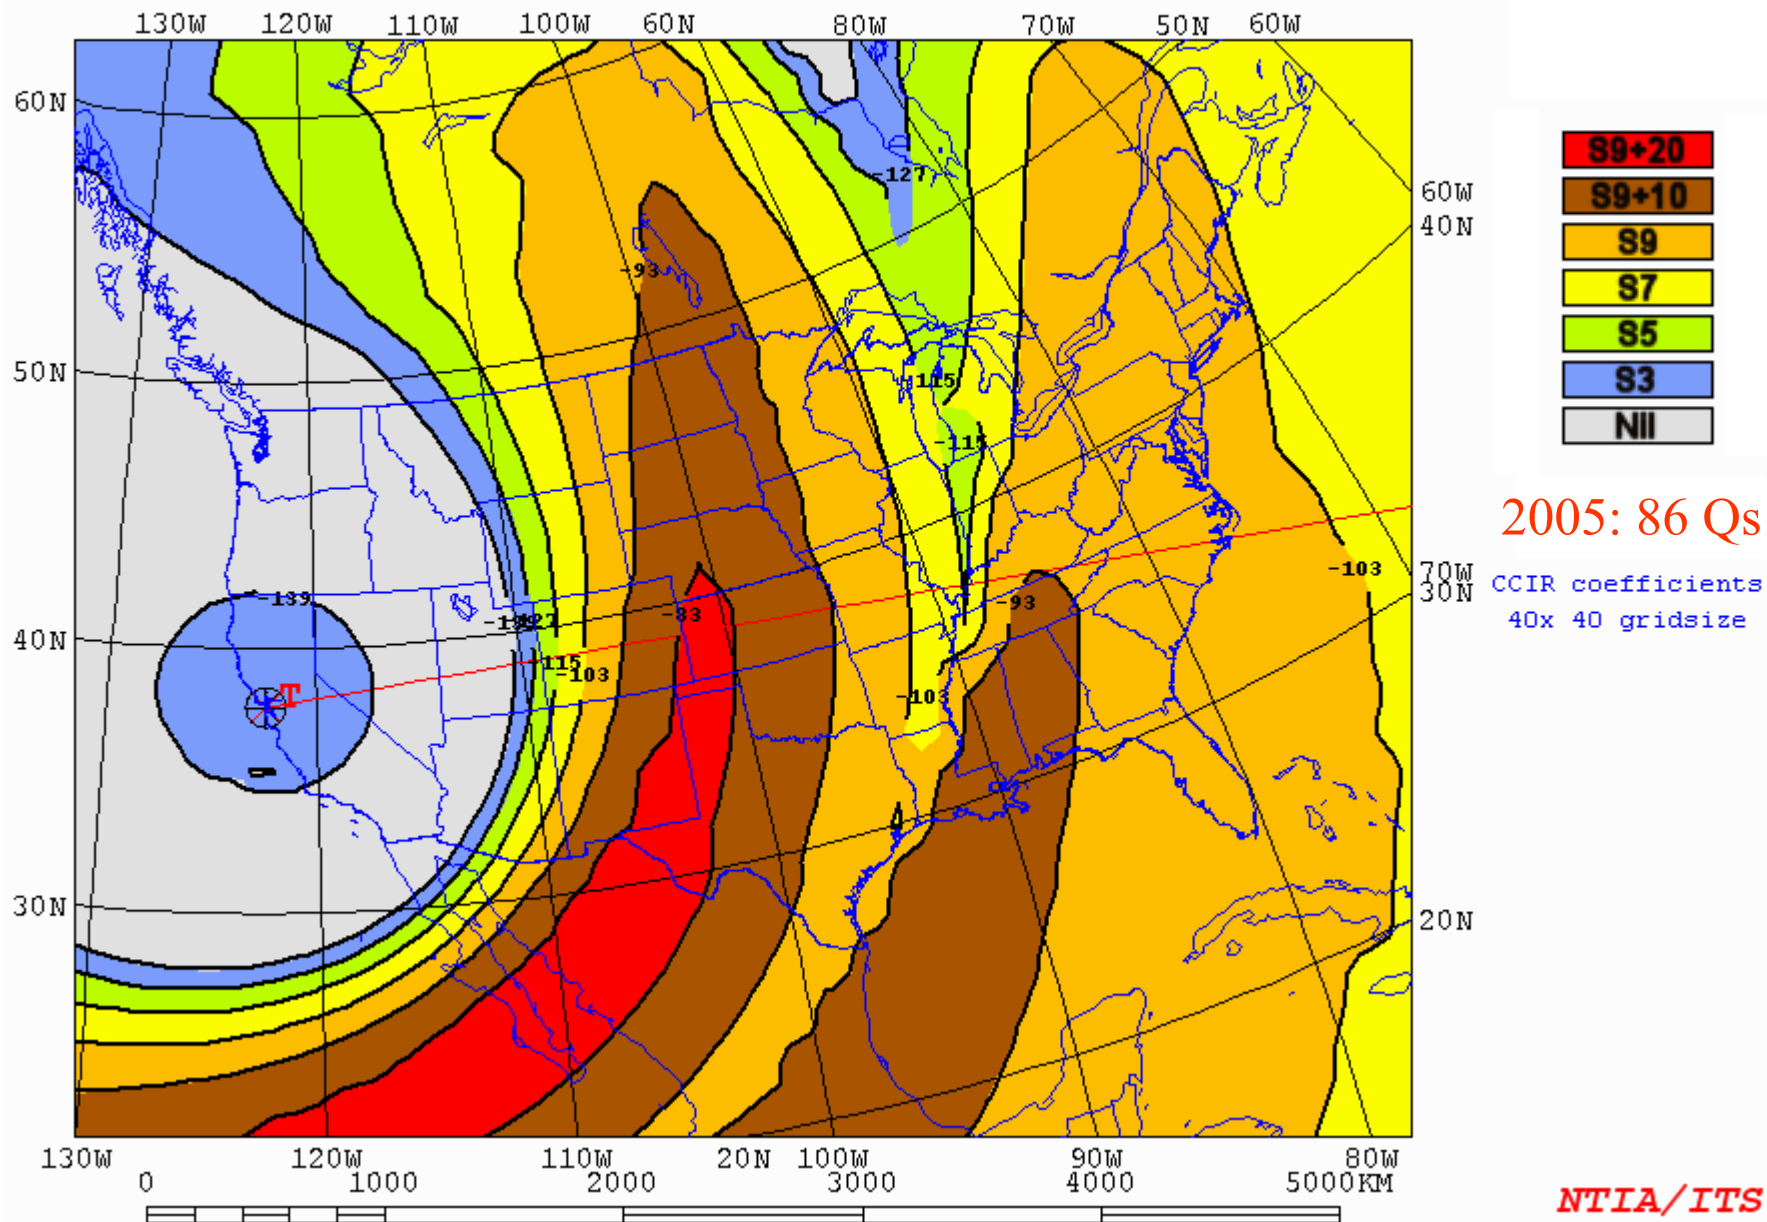


Tx location to grid of Rx

AREADATA\DEFAULT\SF14A.V15

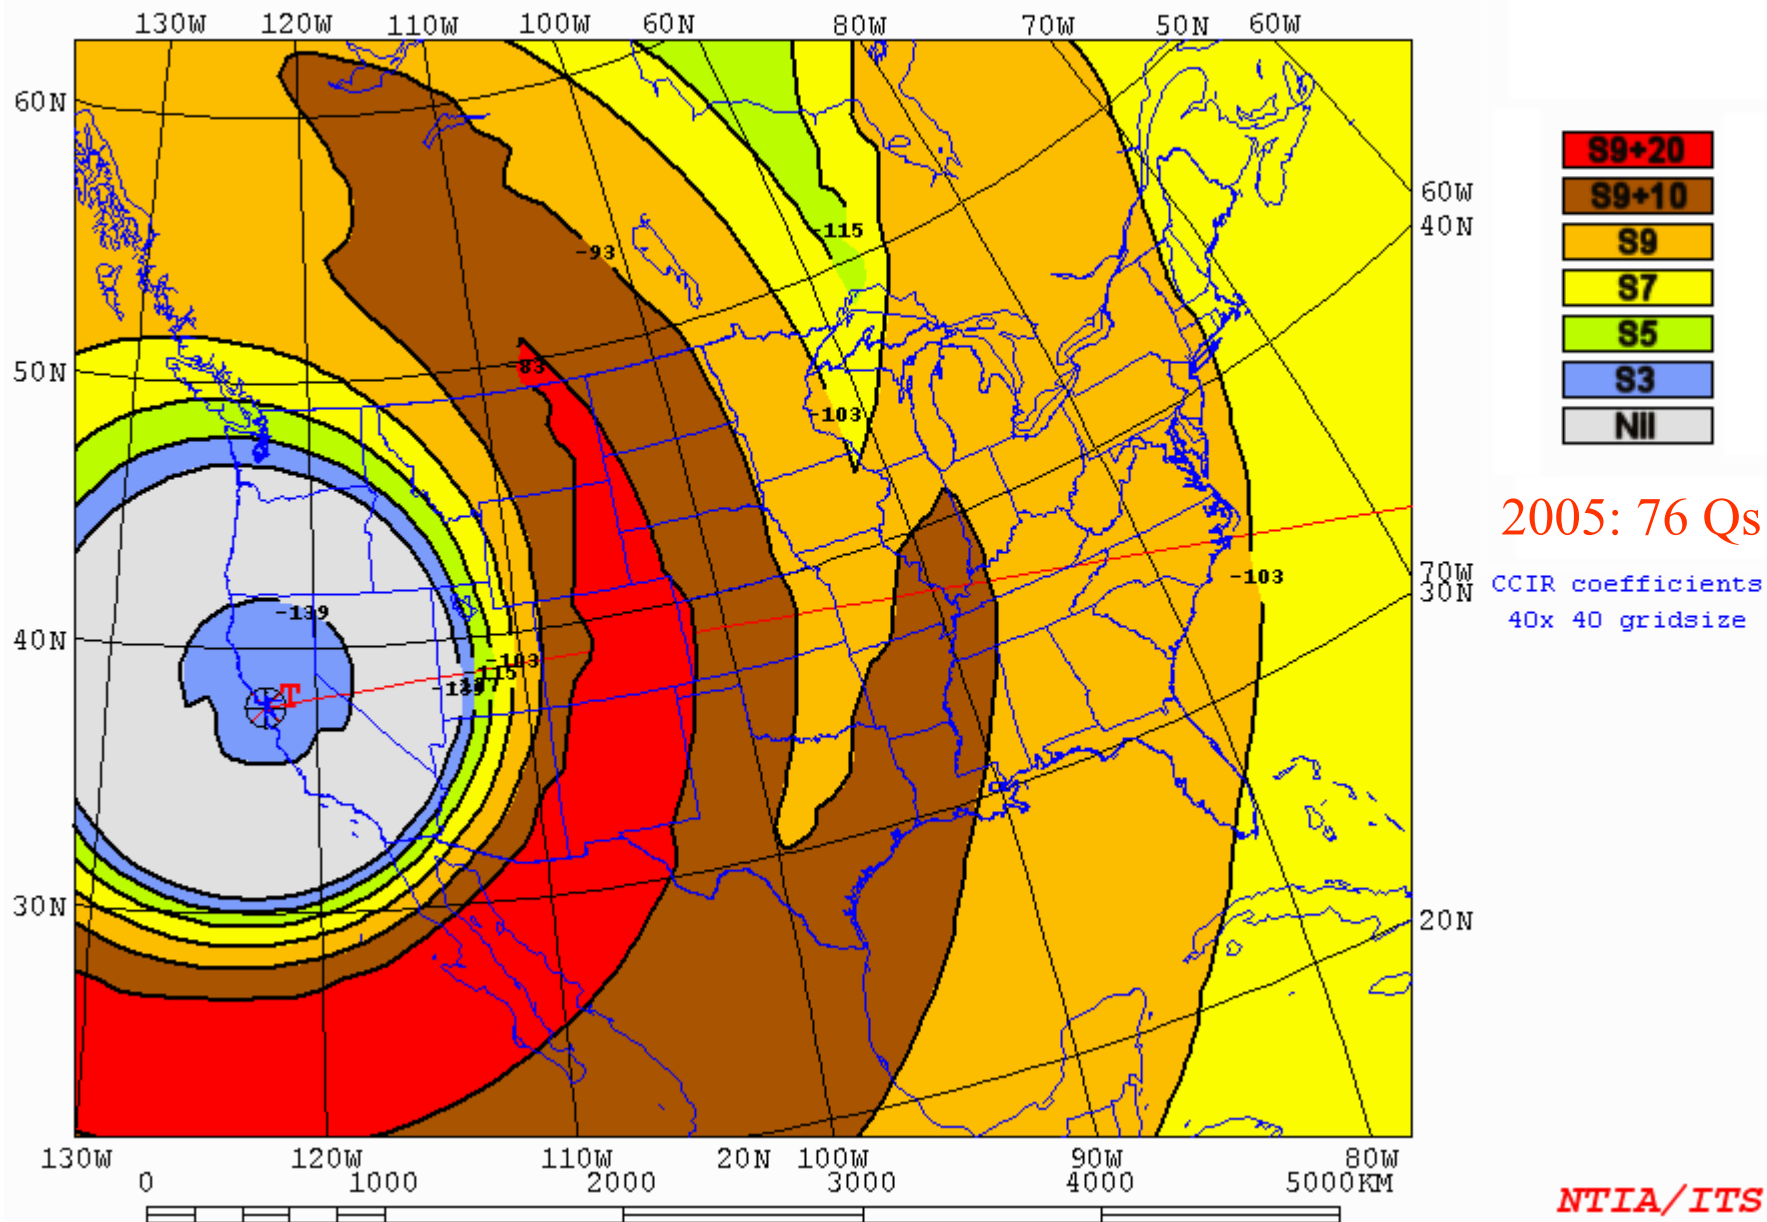


Tx location to grid of Rx

AREADATA\DEFAULT\SF14A.V16

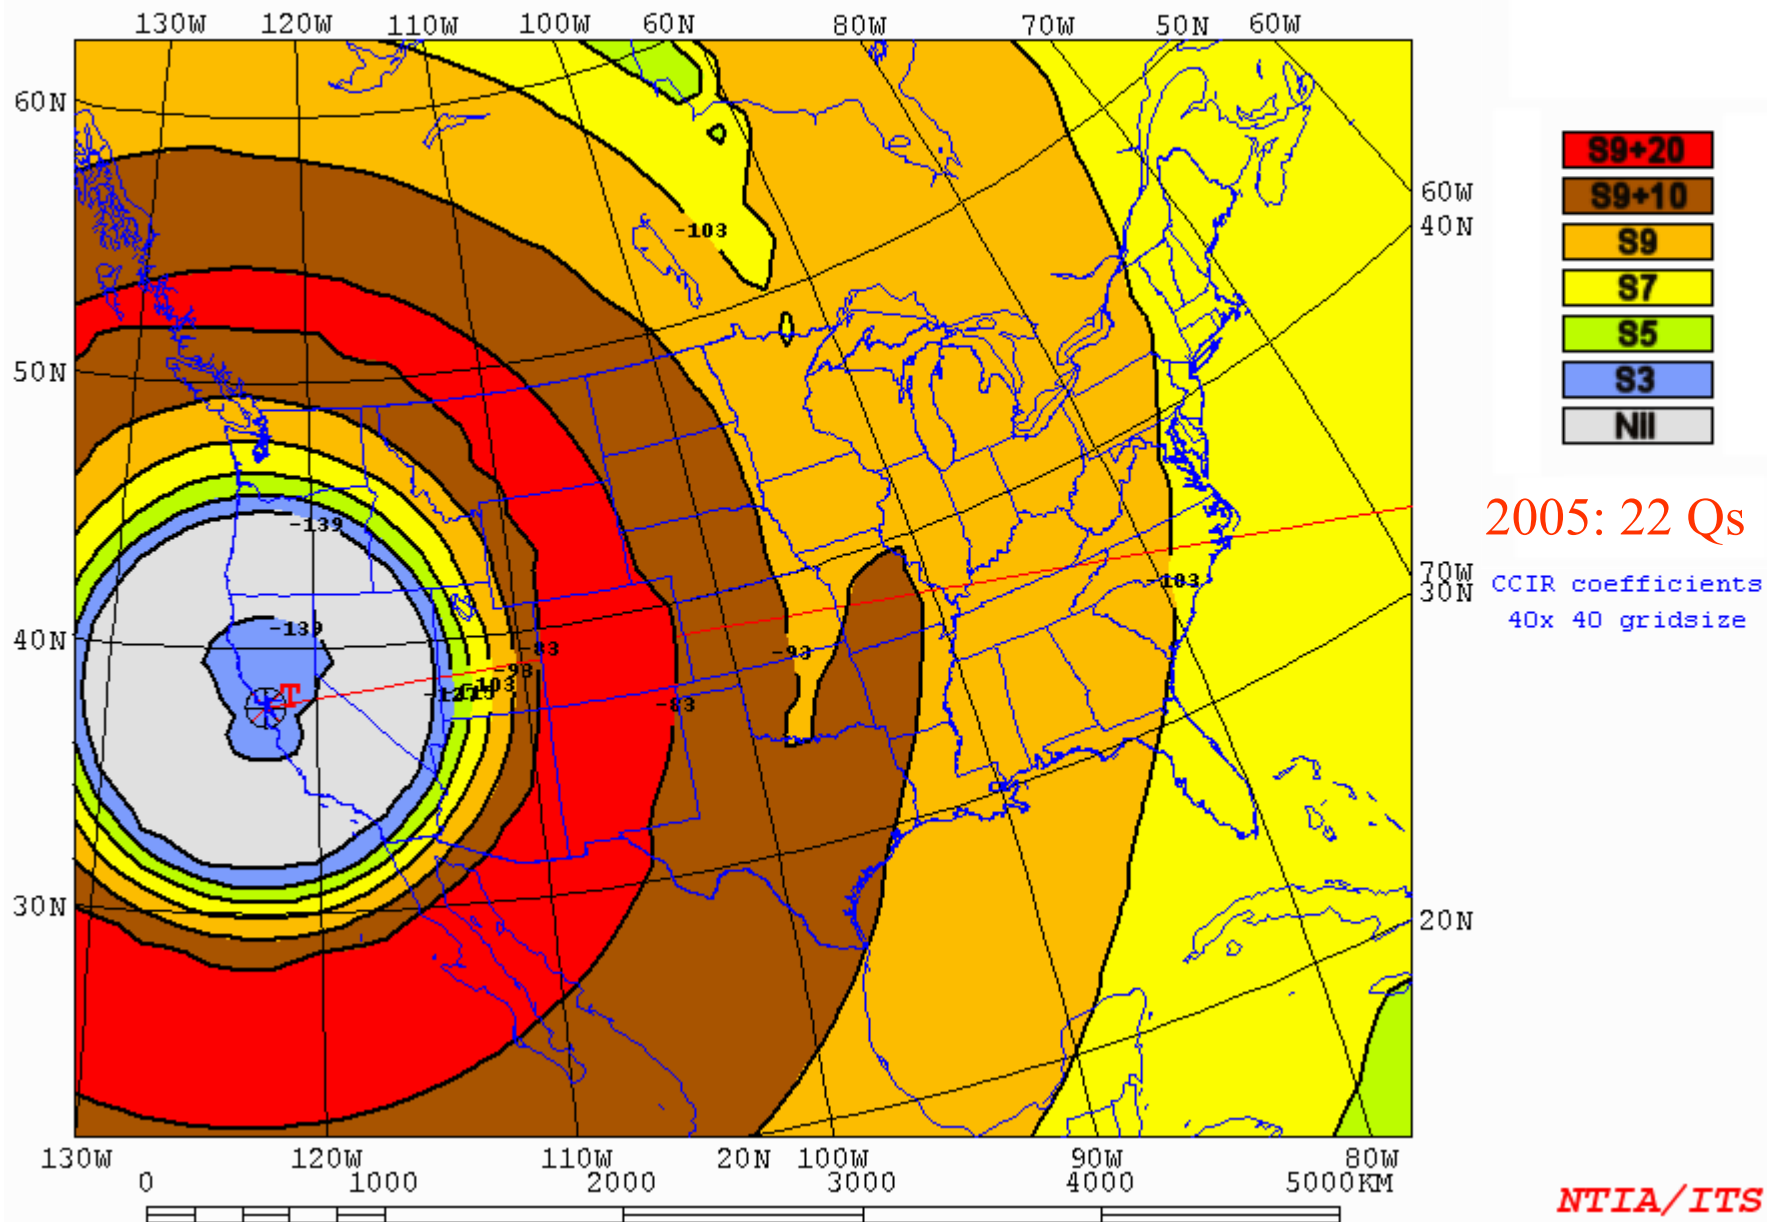


Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V12

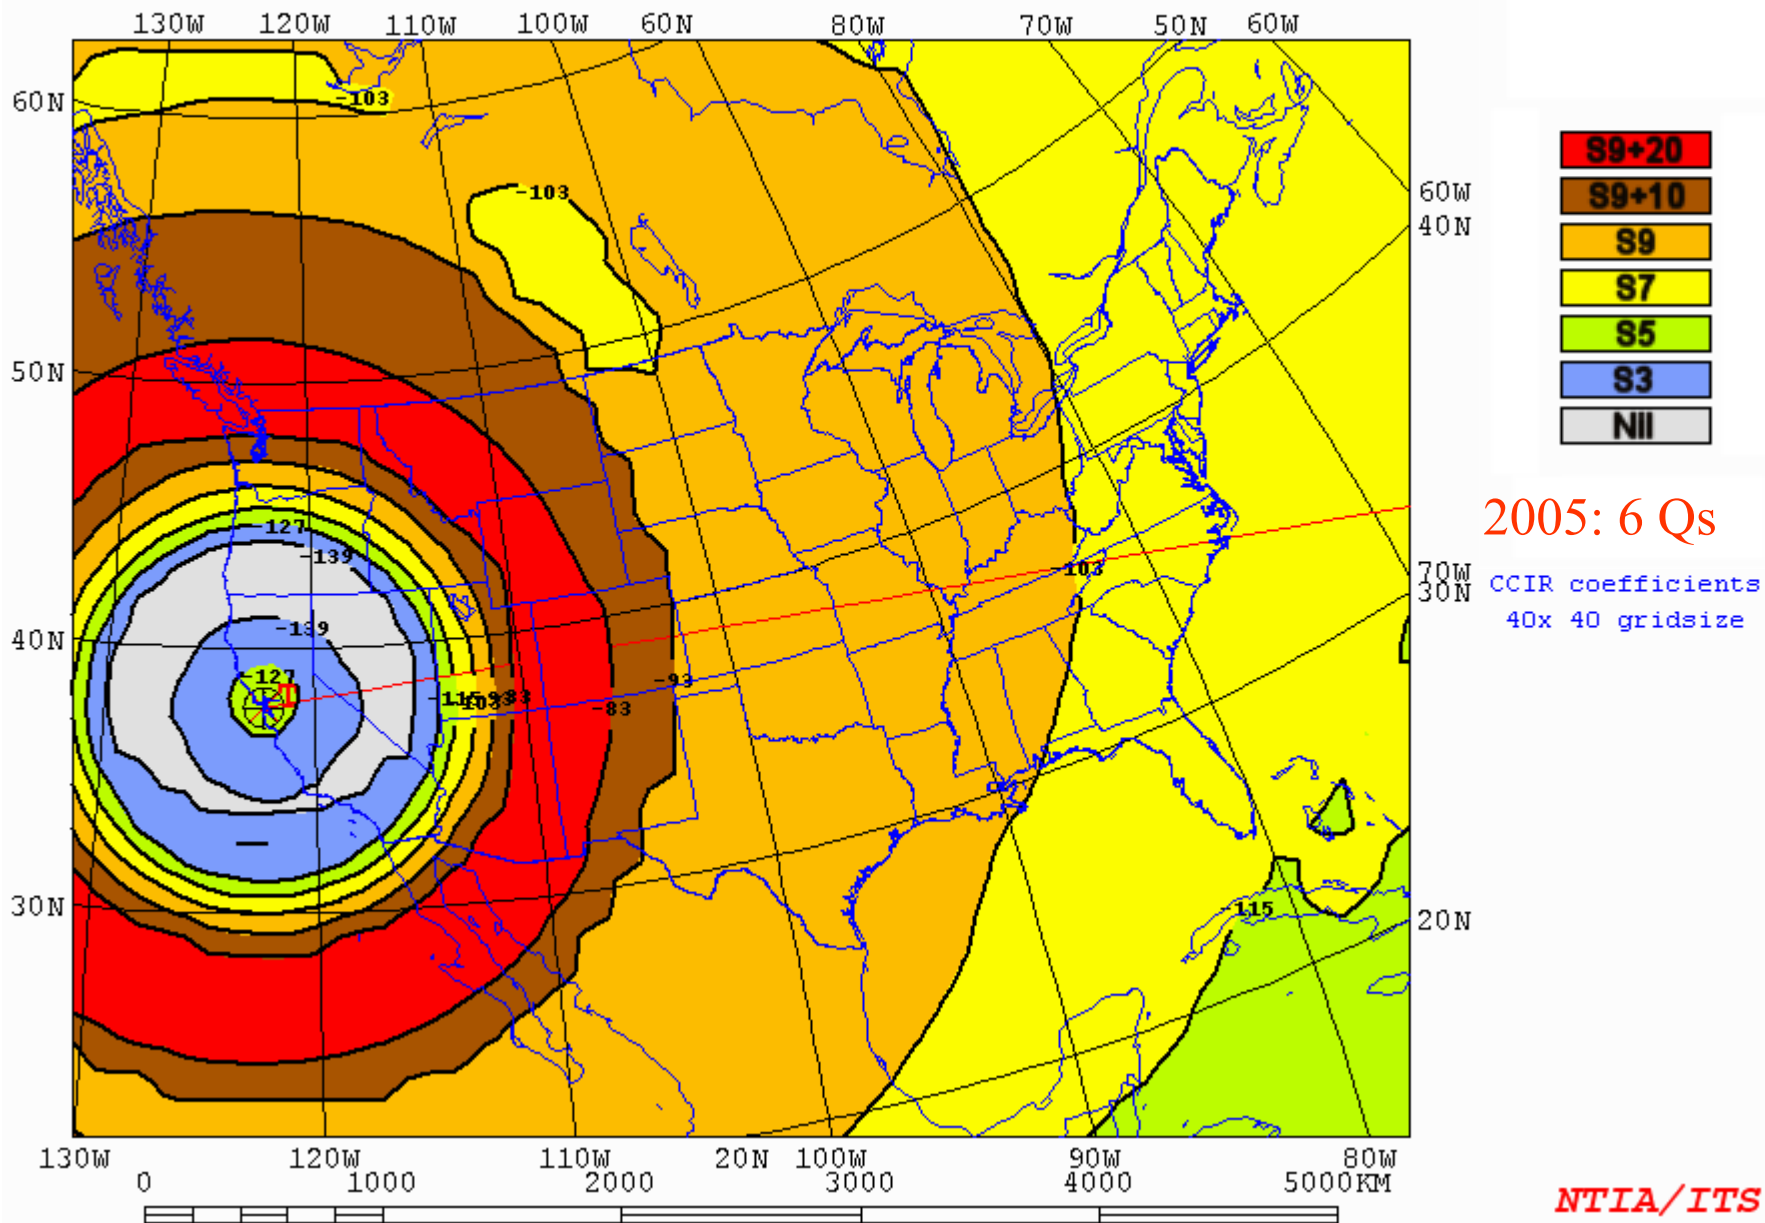

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V13

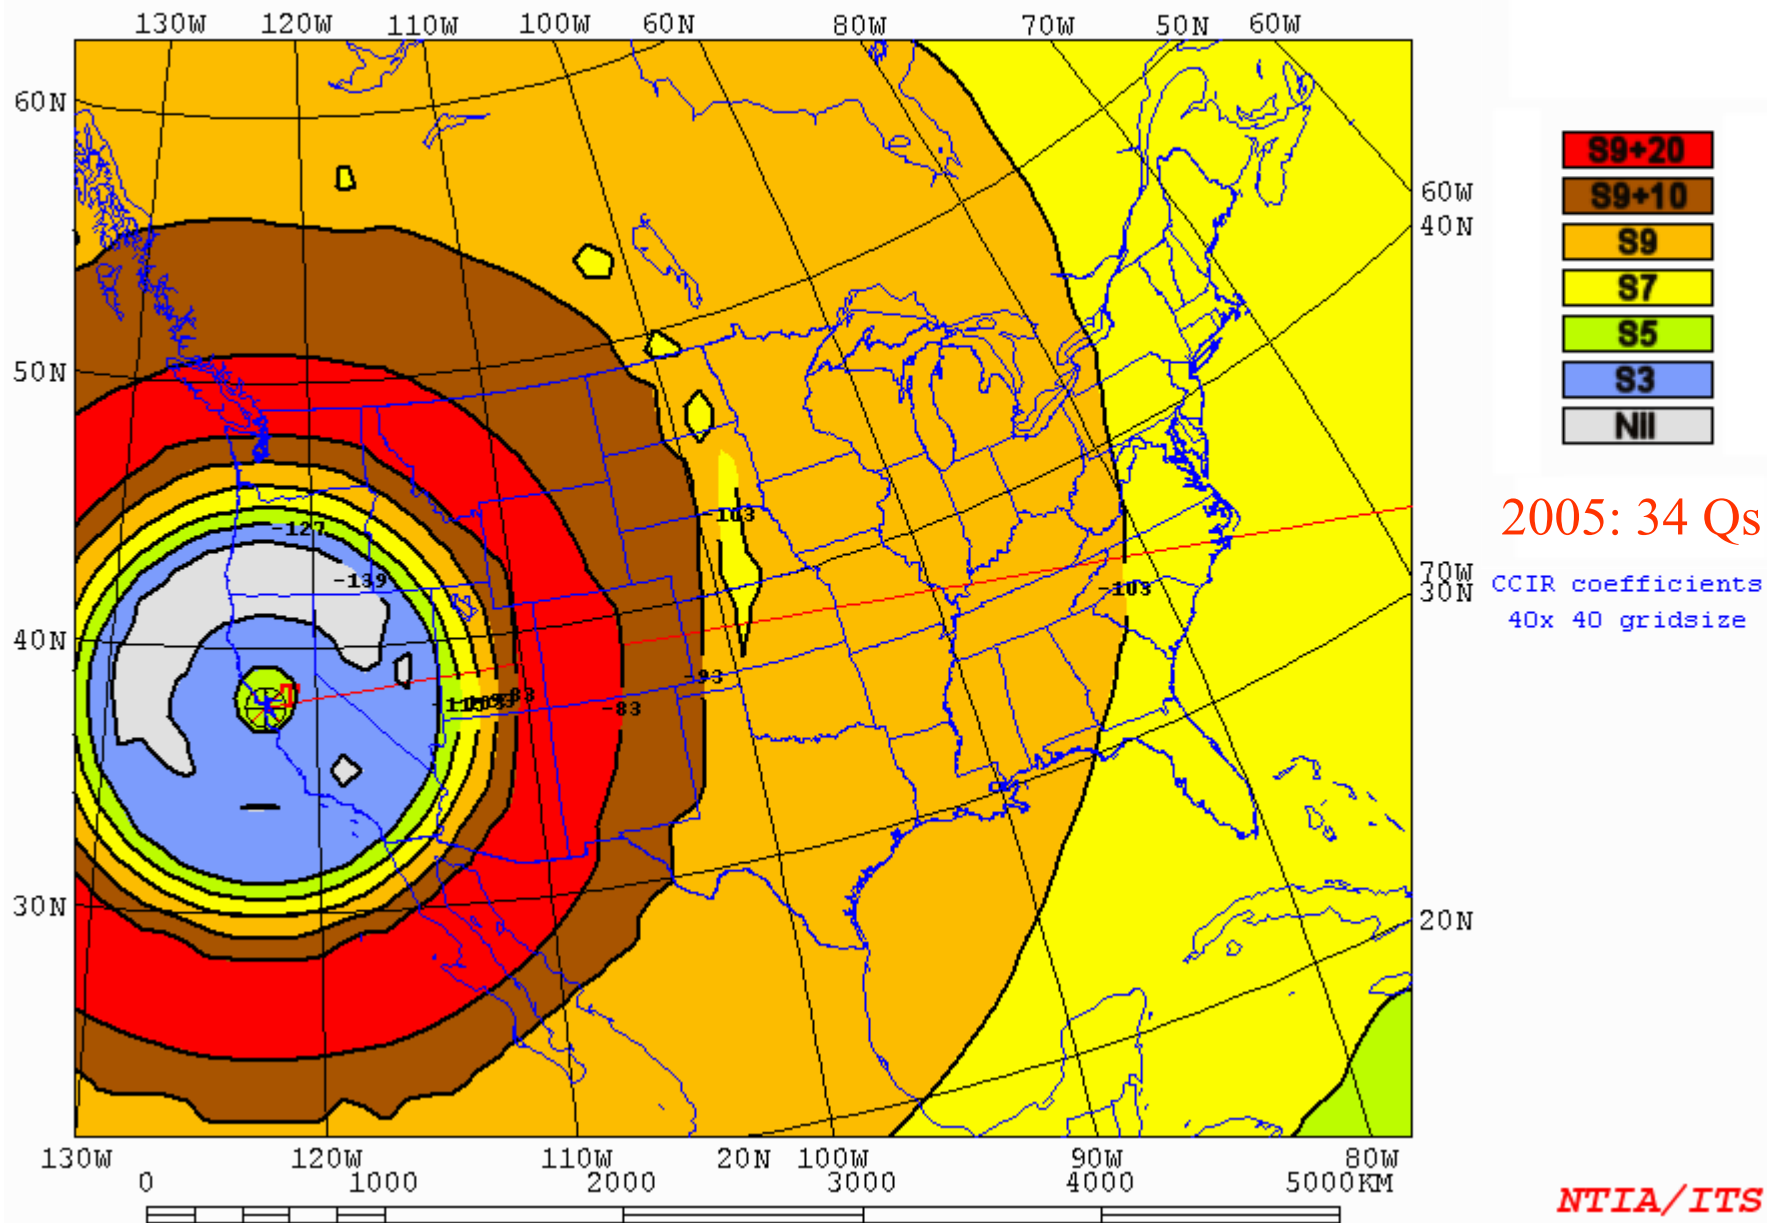


2005: 34 Qs

CCIR coefficients
40x 40 gridsize

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V14

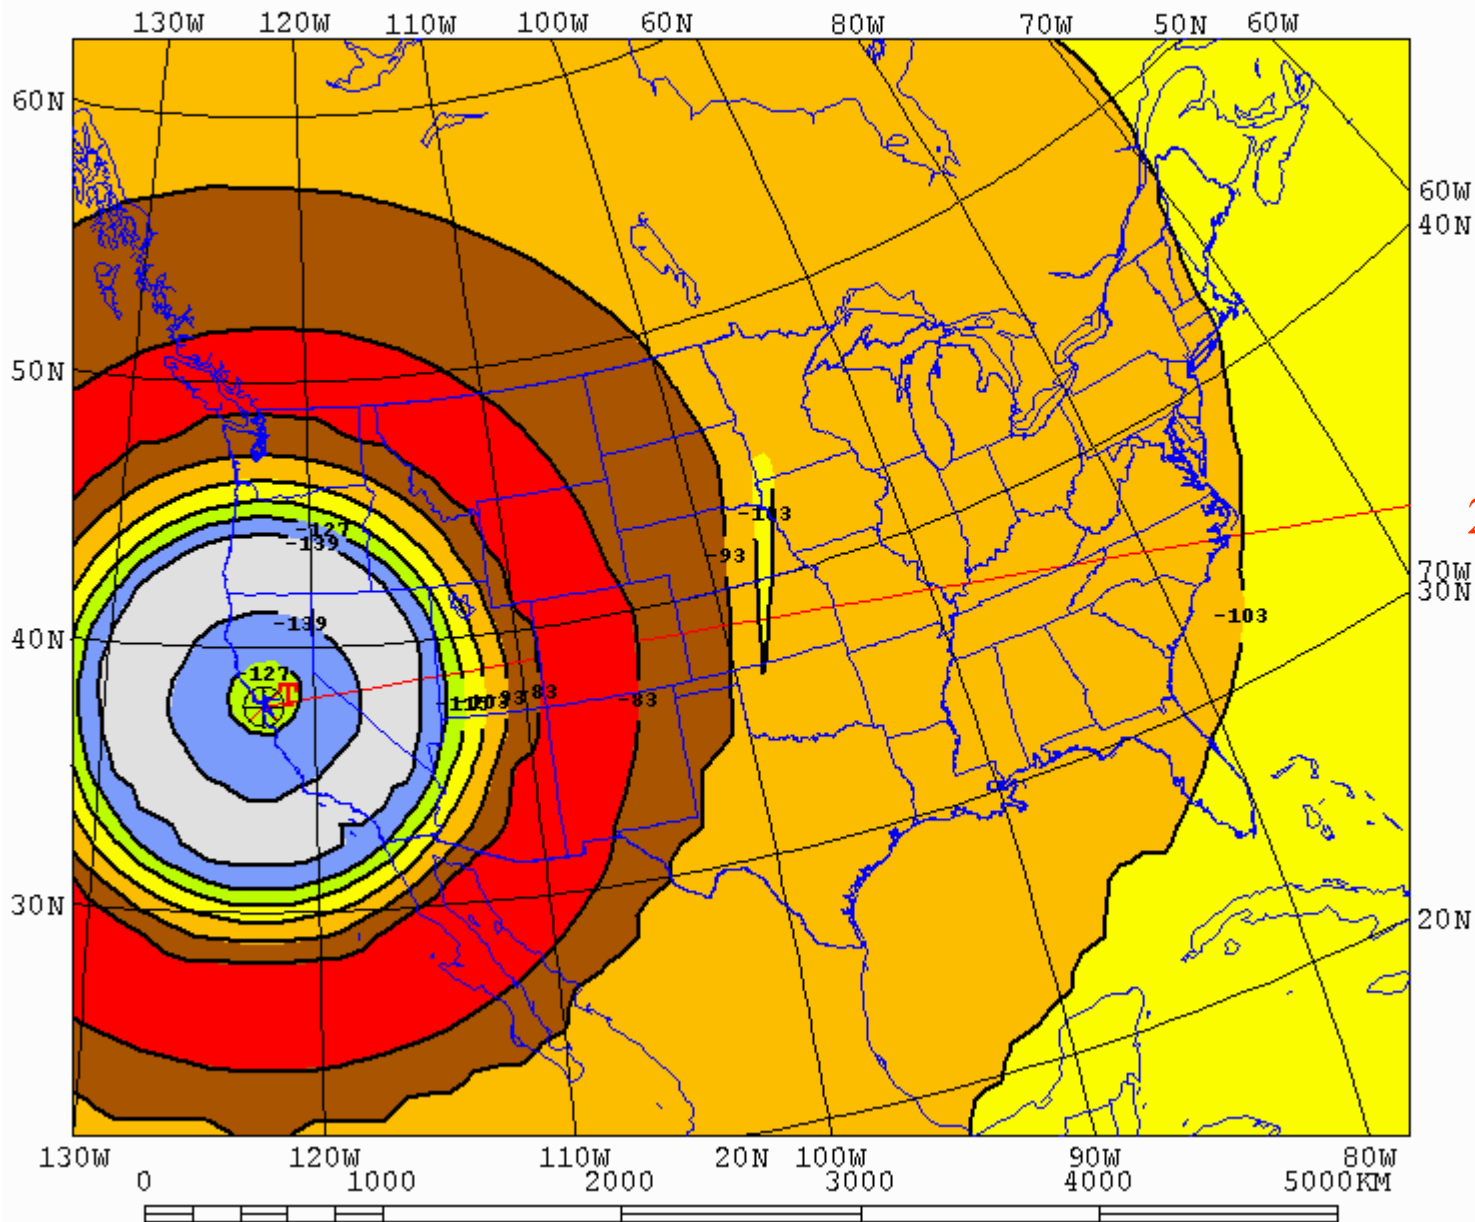

- S9+20
- S9+10
- S9
- S7
- S5
- S3
- Nil


2005: 1/60 Qs

CCIR coefficients
40x 40 gridsize

1st/2nd Day

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V15


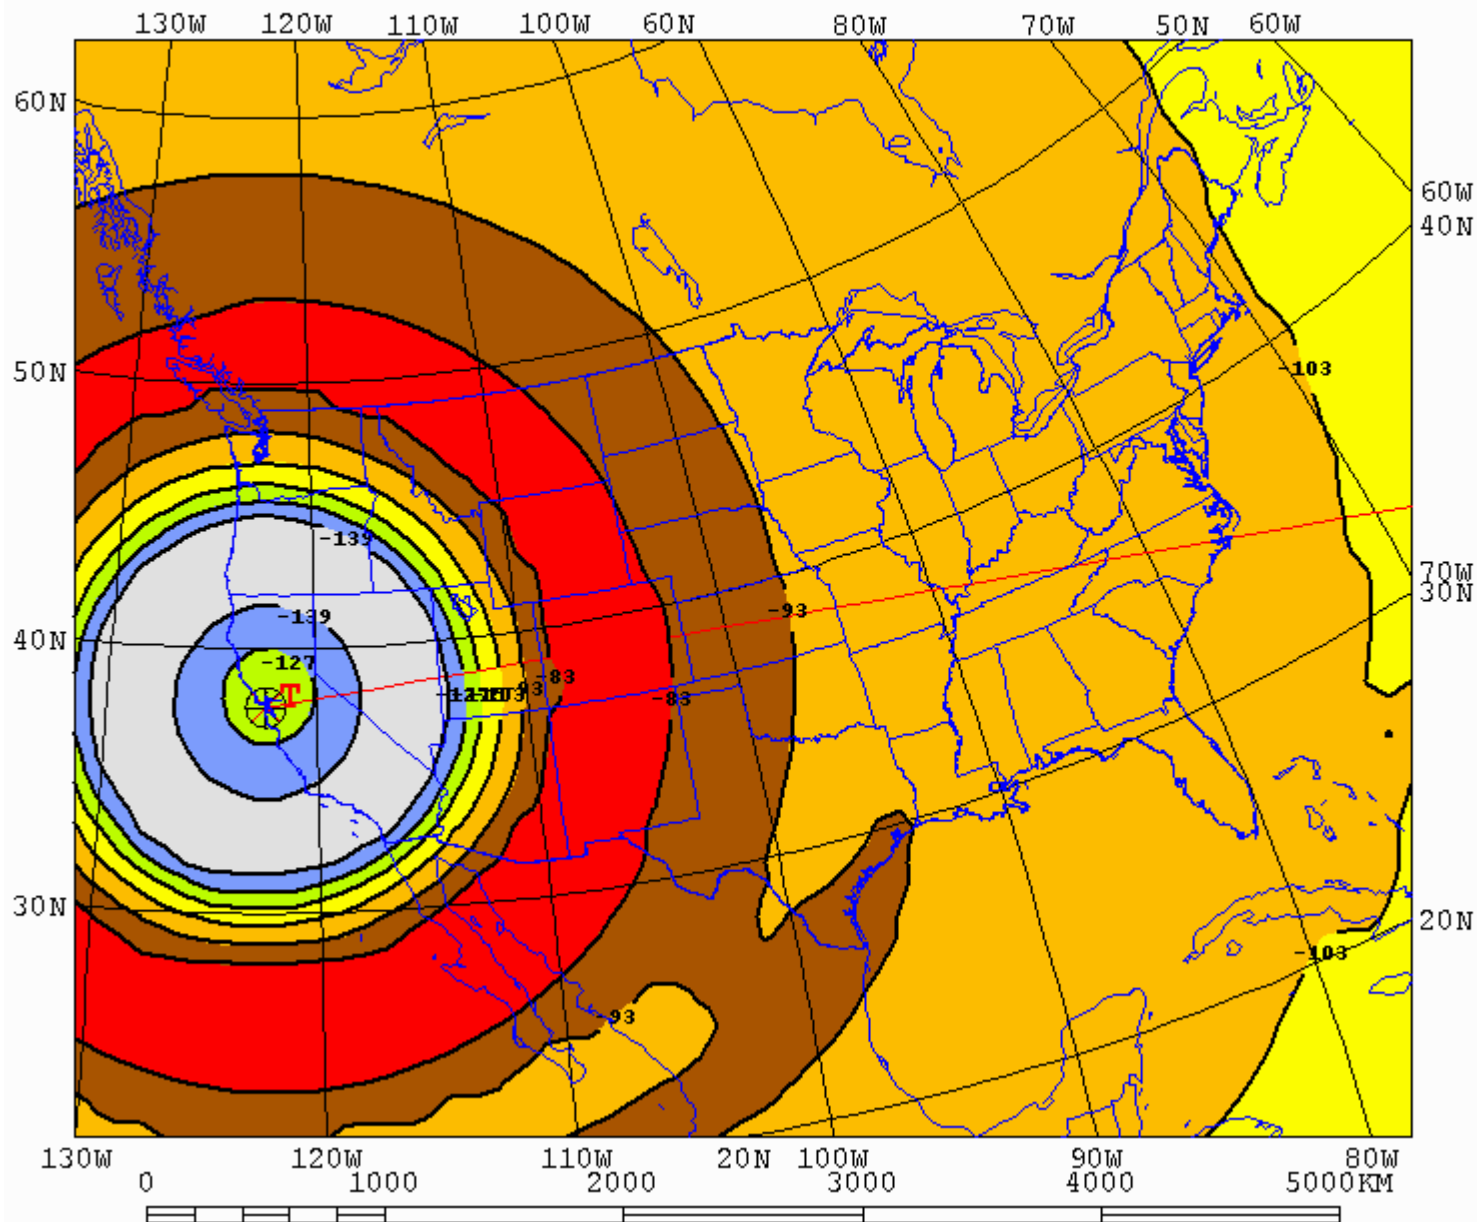


2005: 16/56 Qs

CCIR coefficients
40x 40 gridsize

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V16

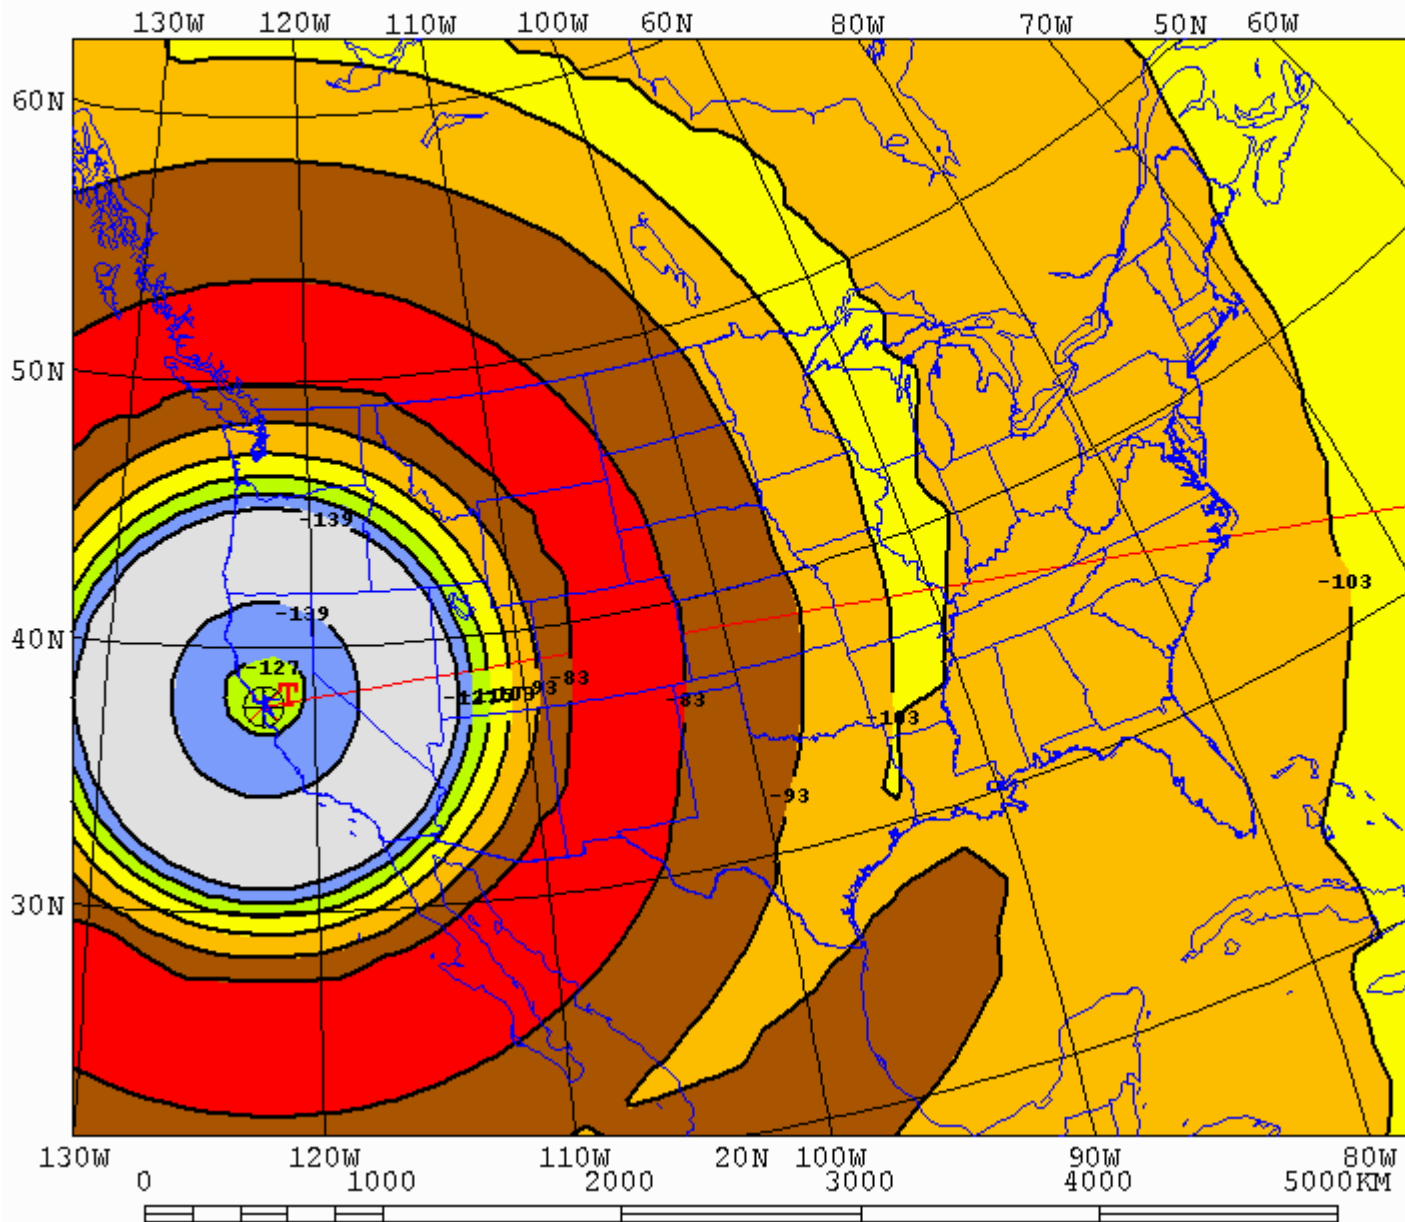



2005: 150/35 Qs

CCIR coefficients
40x 40 gridsize

20-meter
coverage
starts
shrinking

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V17

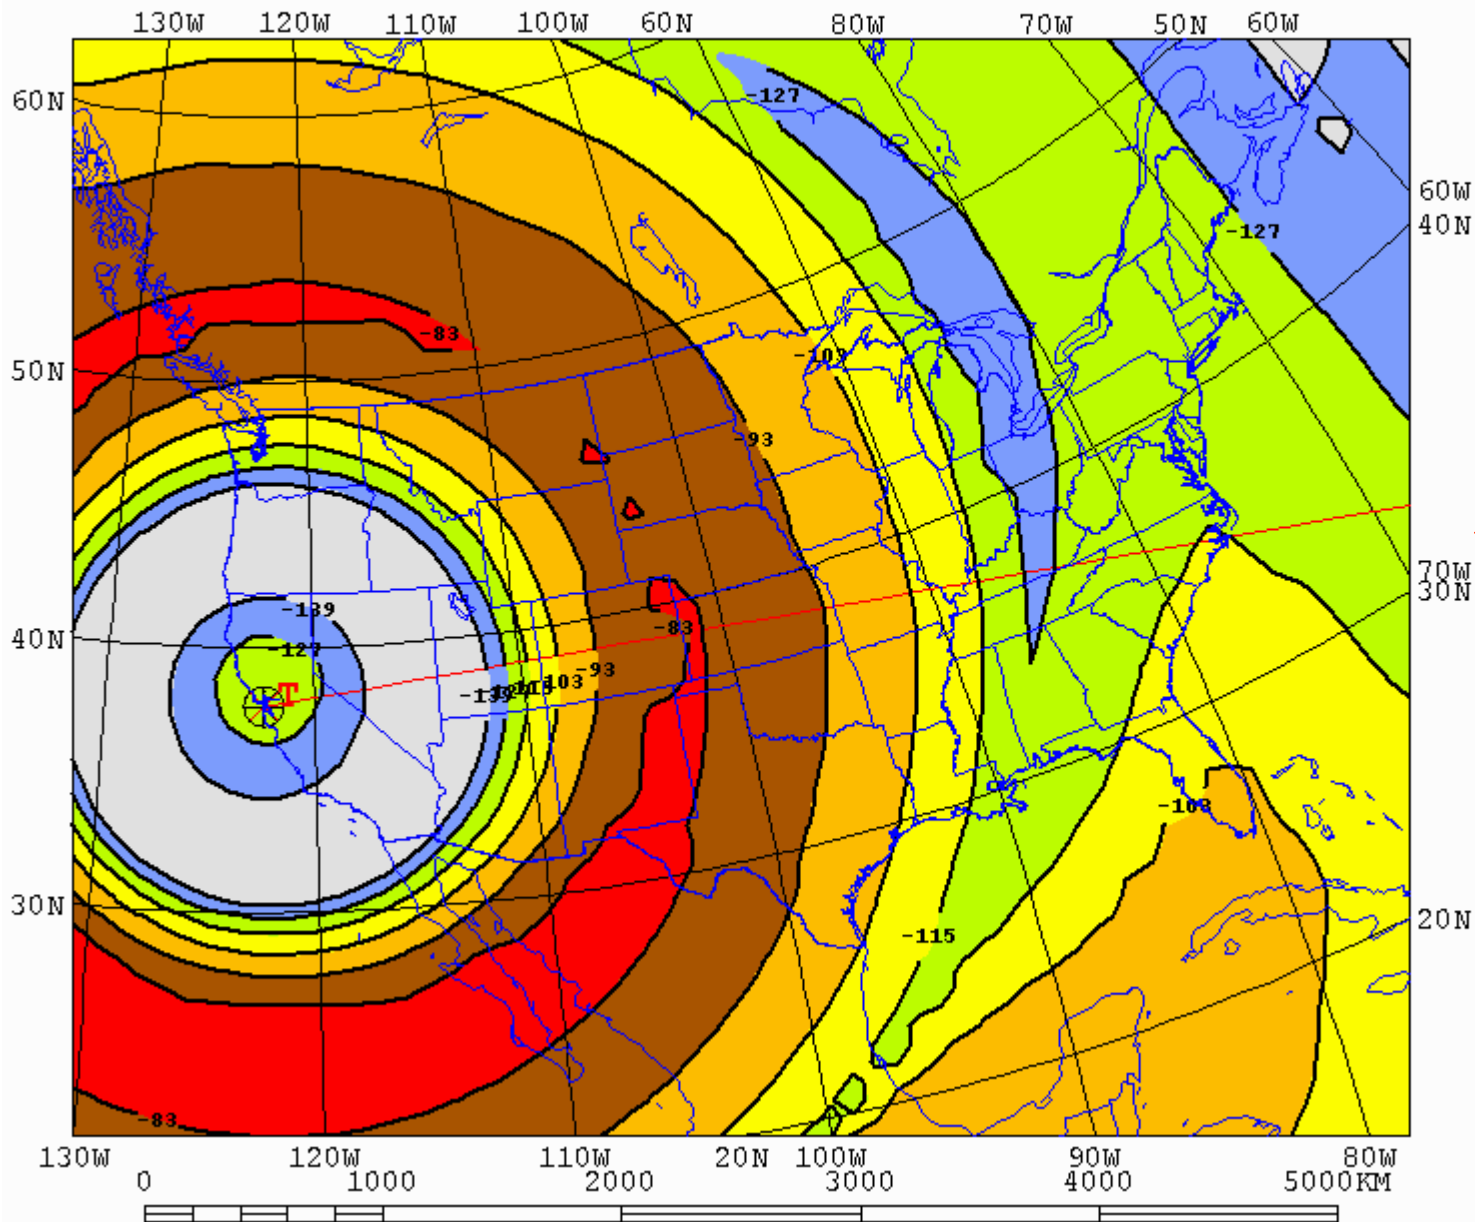


2005: 124/0 Qs

CCIR coefficients
40x 40 gridsize

Last
hurrah on
20

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V18

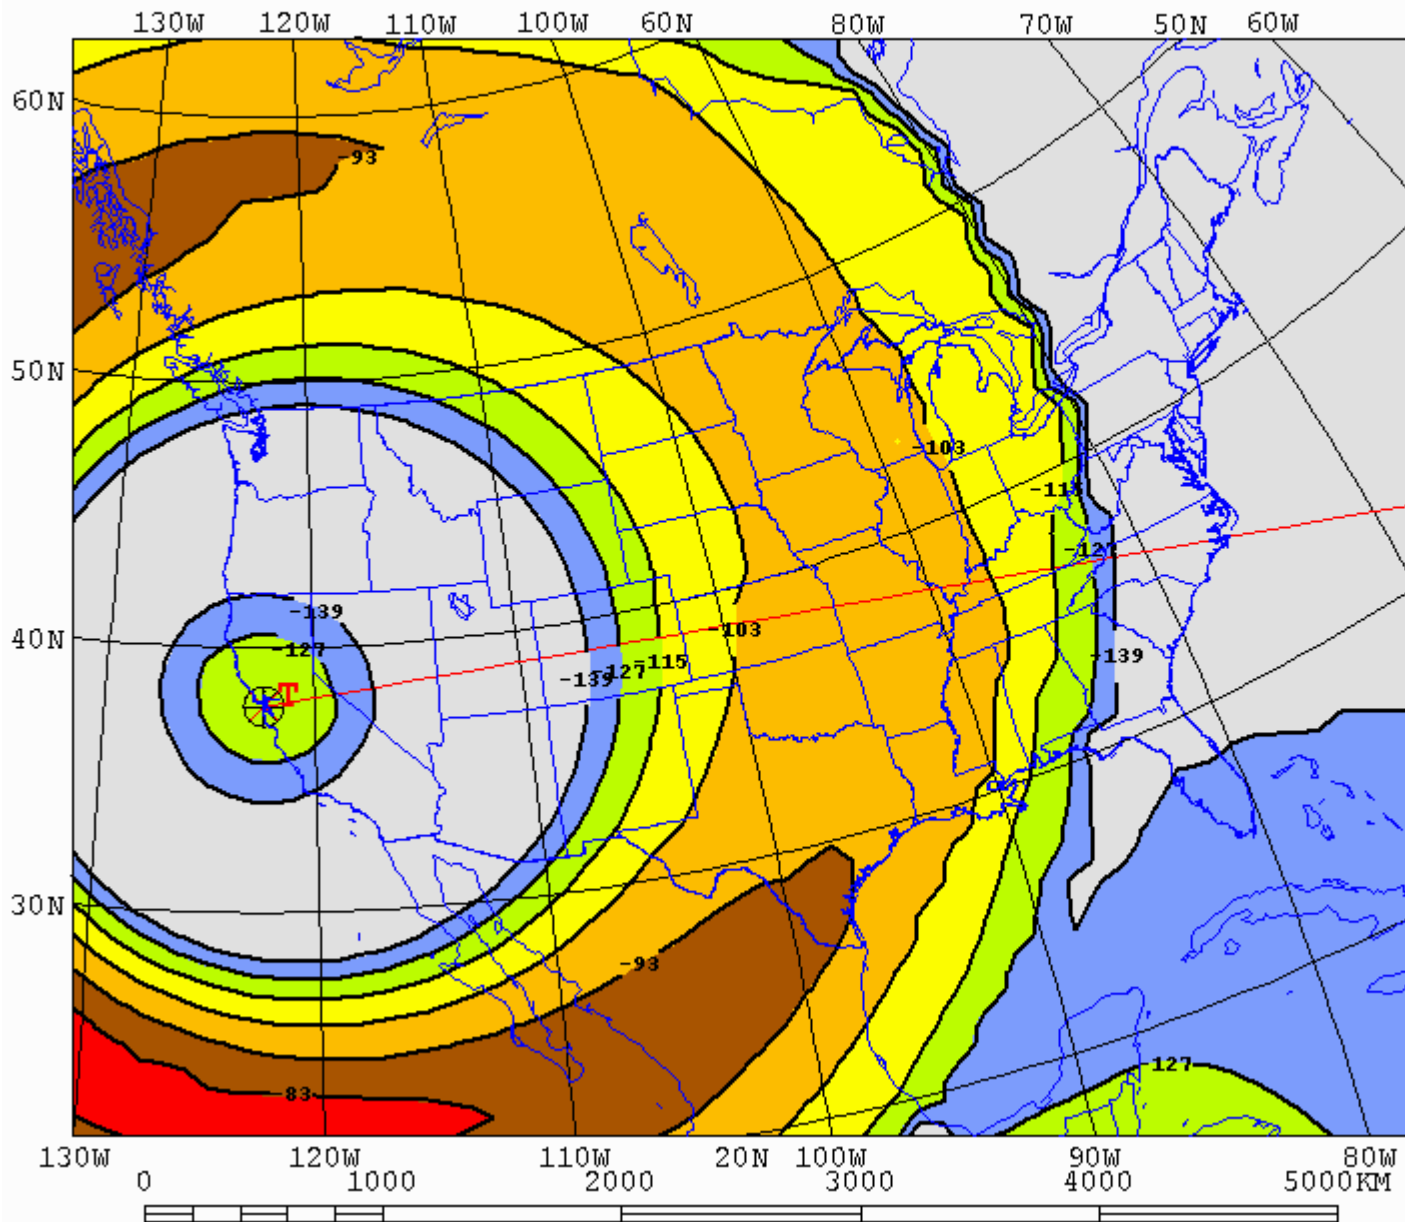


2005: 24/0 Qs

Propagation gets a little better for a while in Midwest

Tx location to grid of Rx

AREADATA\DEFAULT\SF14.V19

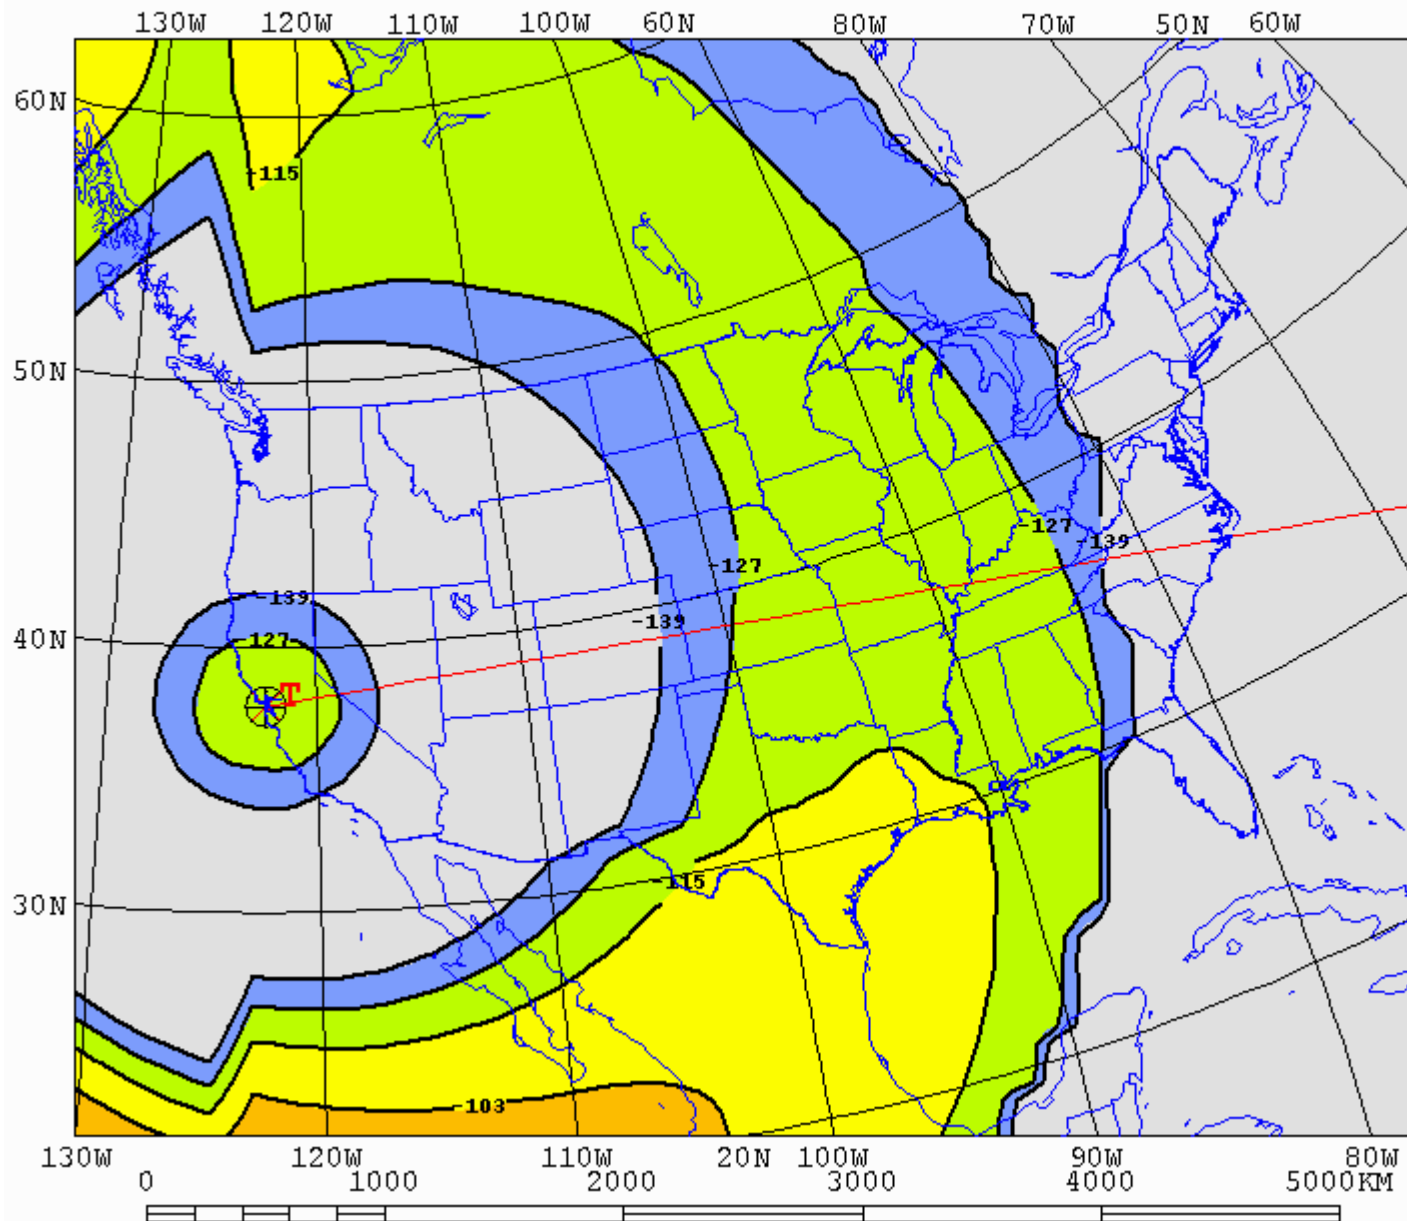

2005: 0/0 Qs

CCIR coefficients
40x 40 gridsize

Goodnight,
20 meters




15-Meter Coverage

- During low portion of Solar Cycle, 15 meters will be reasonably good to Midwest, but marginal to East Coast.
- Big stacks help, of course, but relatively modest 15-meter beams can do well on 15.


Tx location to grid of Rx

AREADATA\DEFAULT\CHIC21.V11

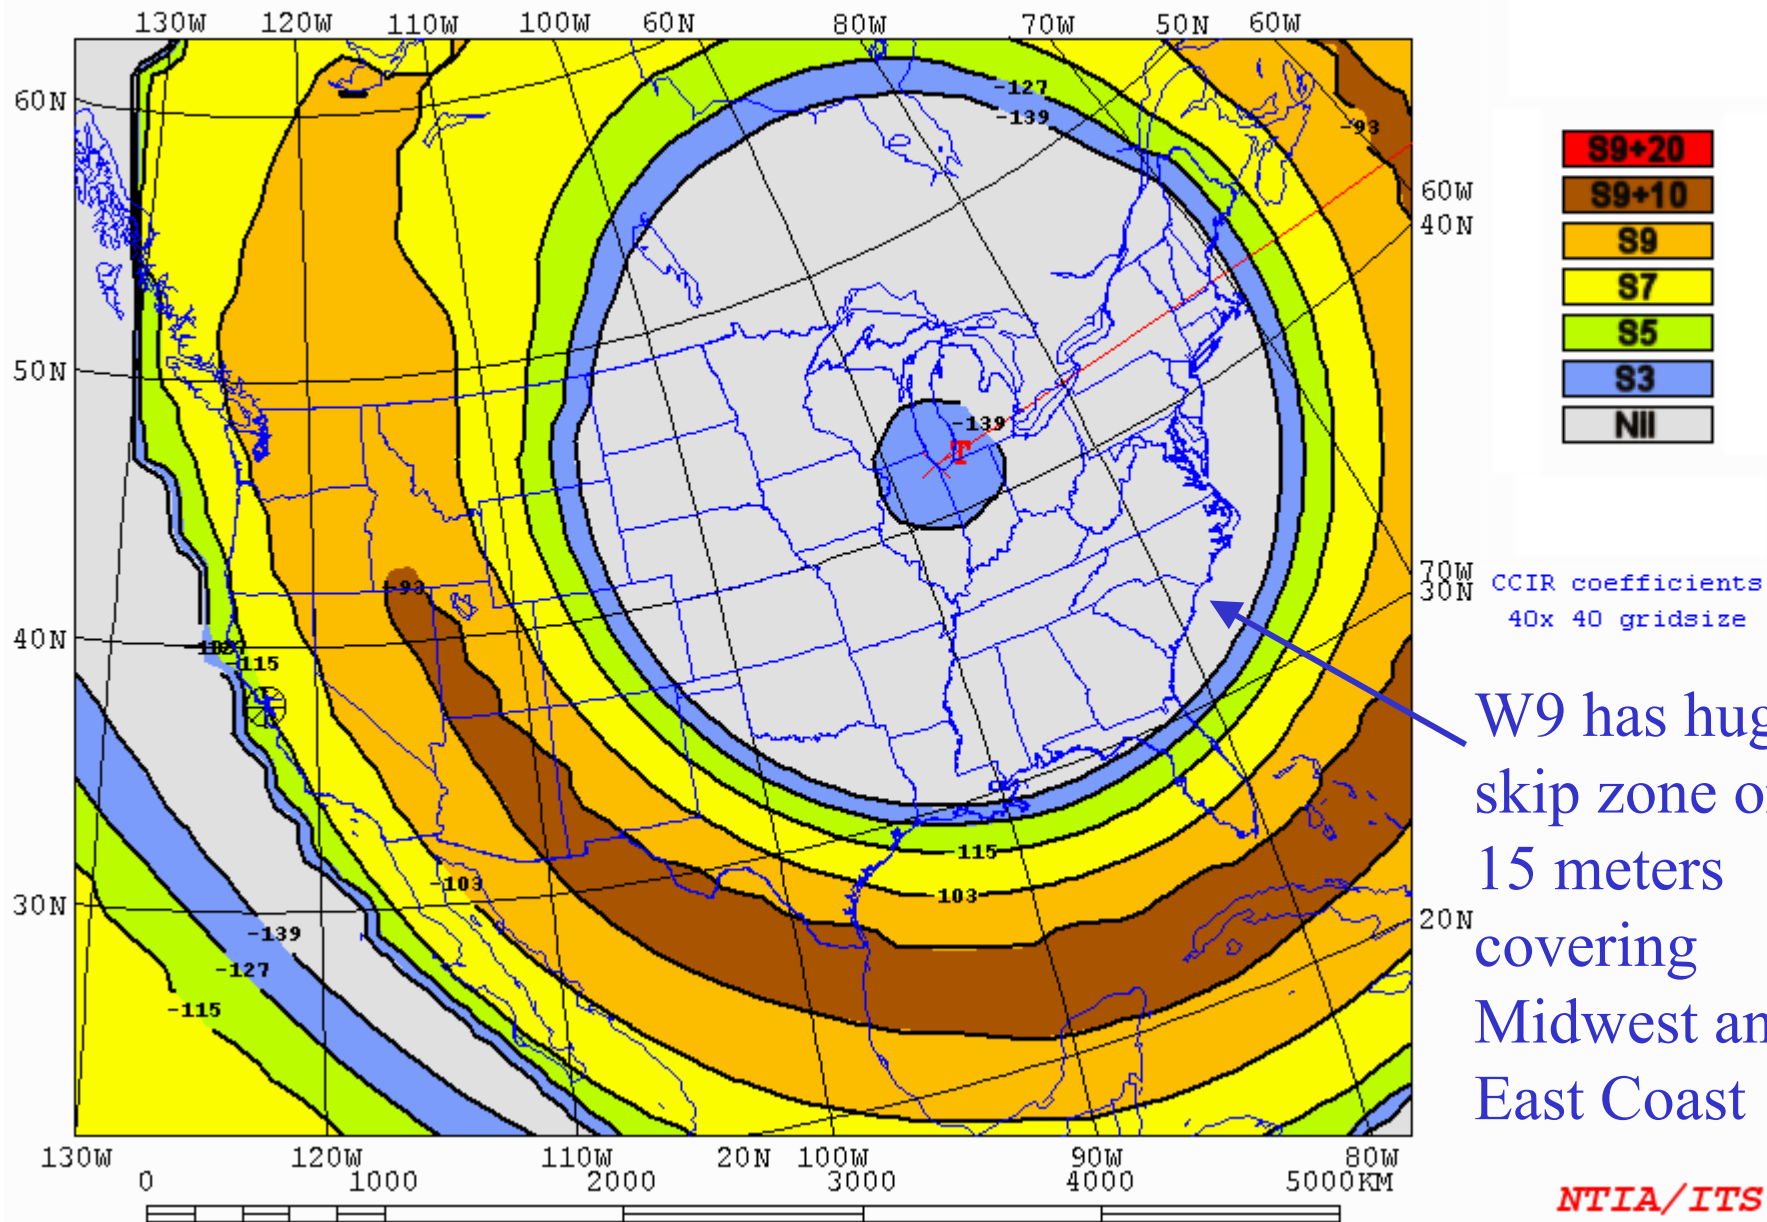


Tx location to grid of Rx

AREADATA\DEFAULT\WASH21.V11

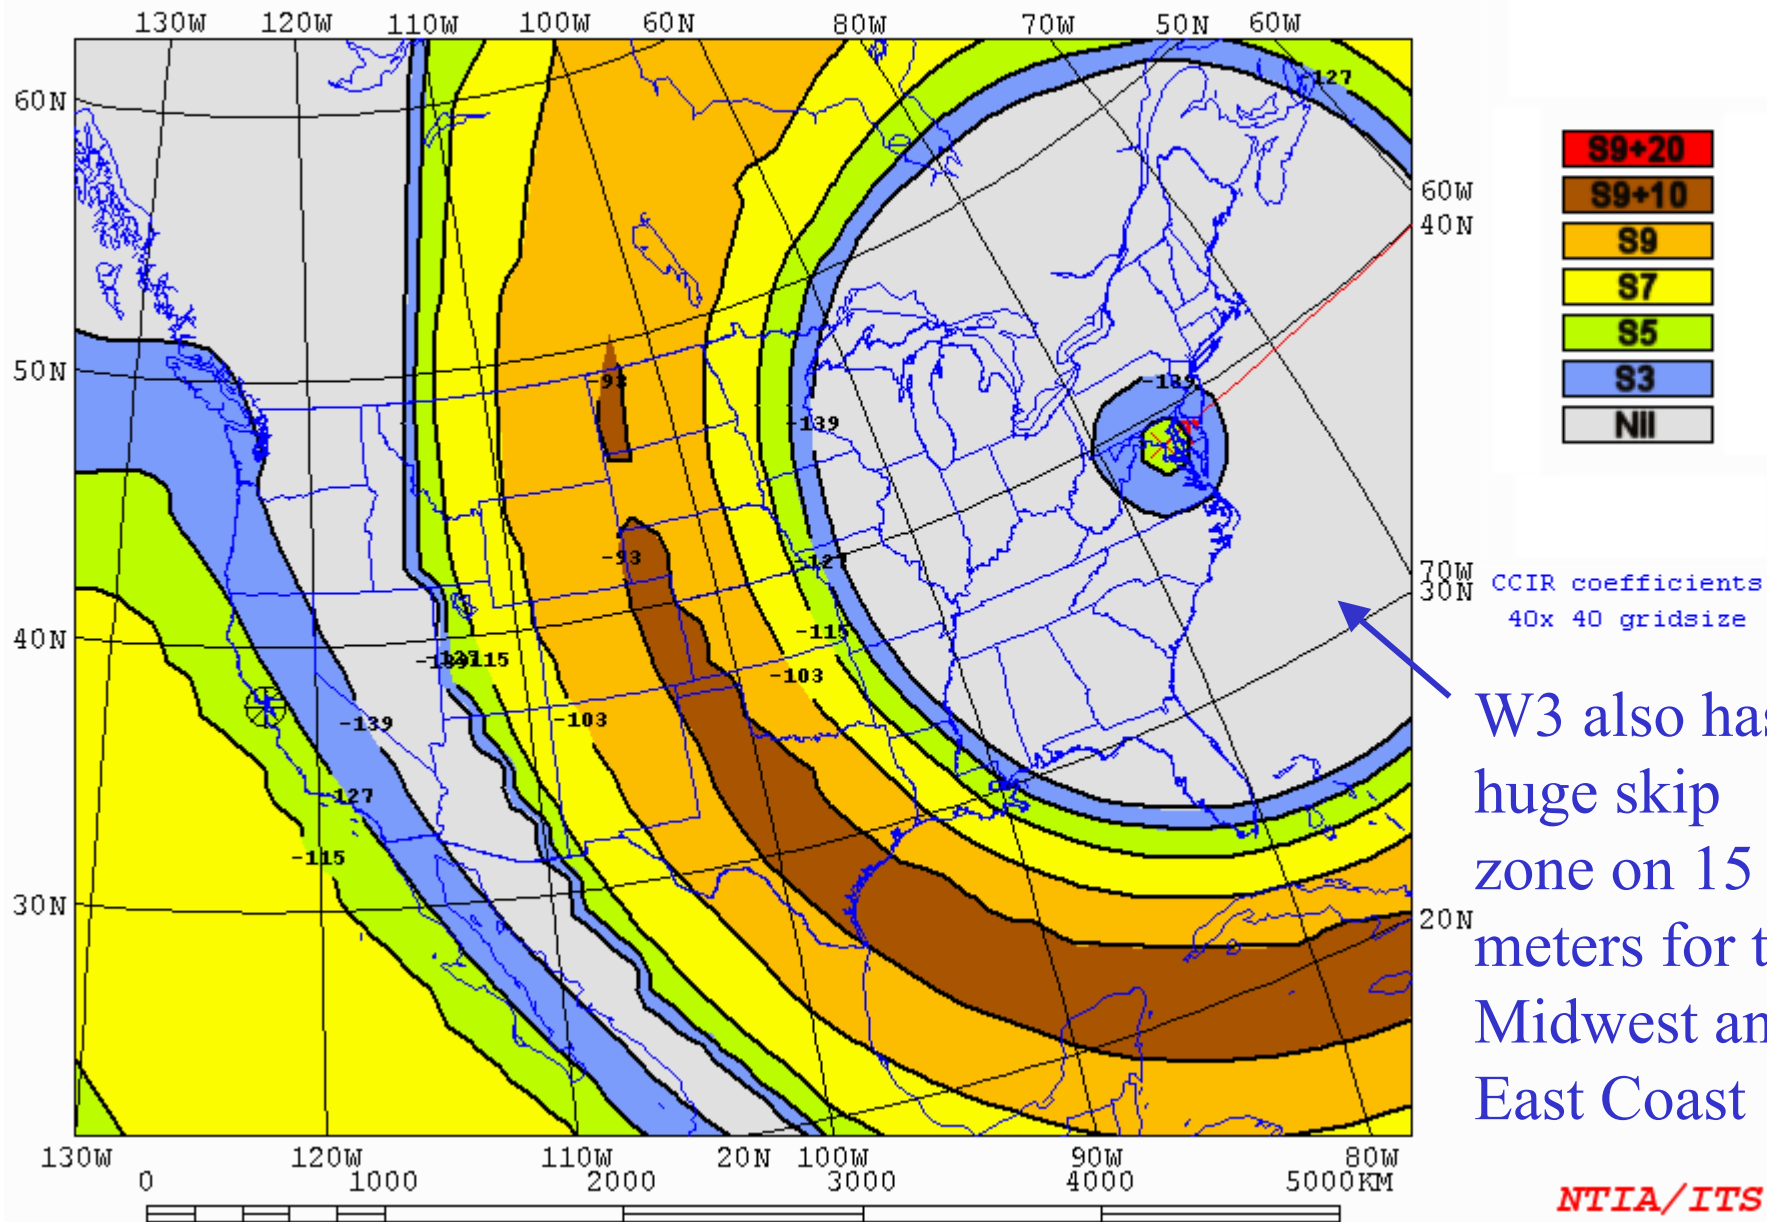

Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V11

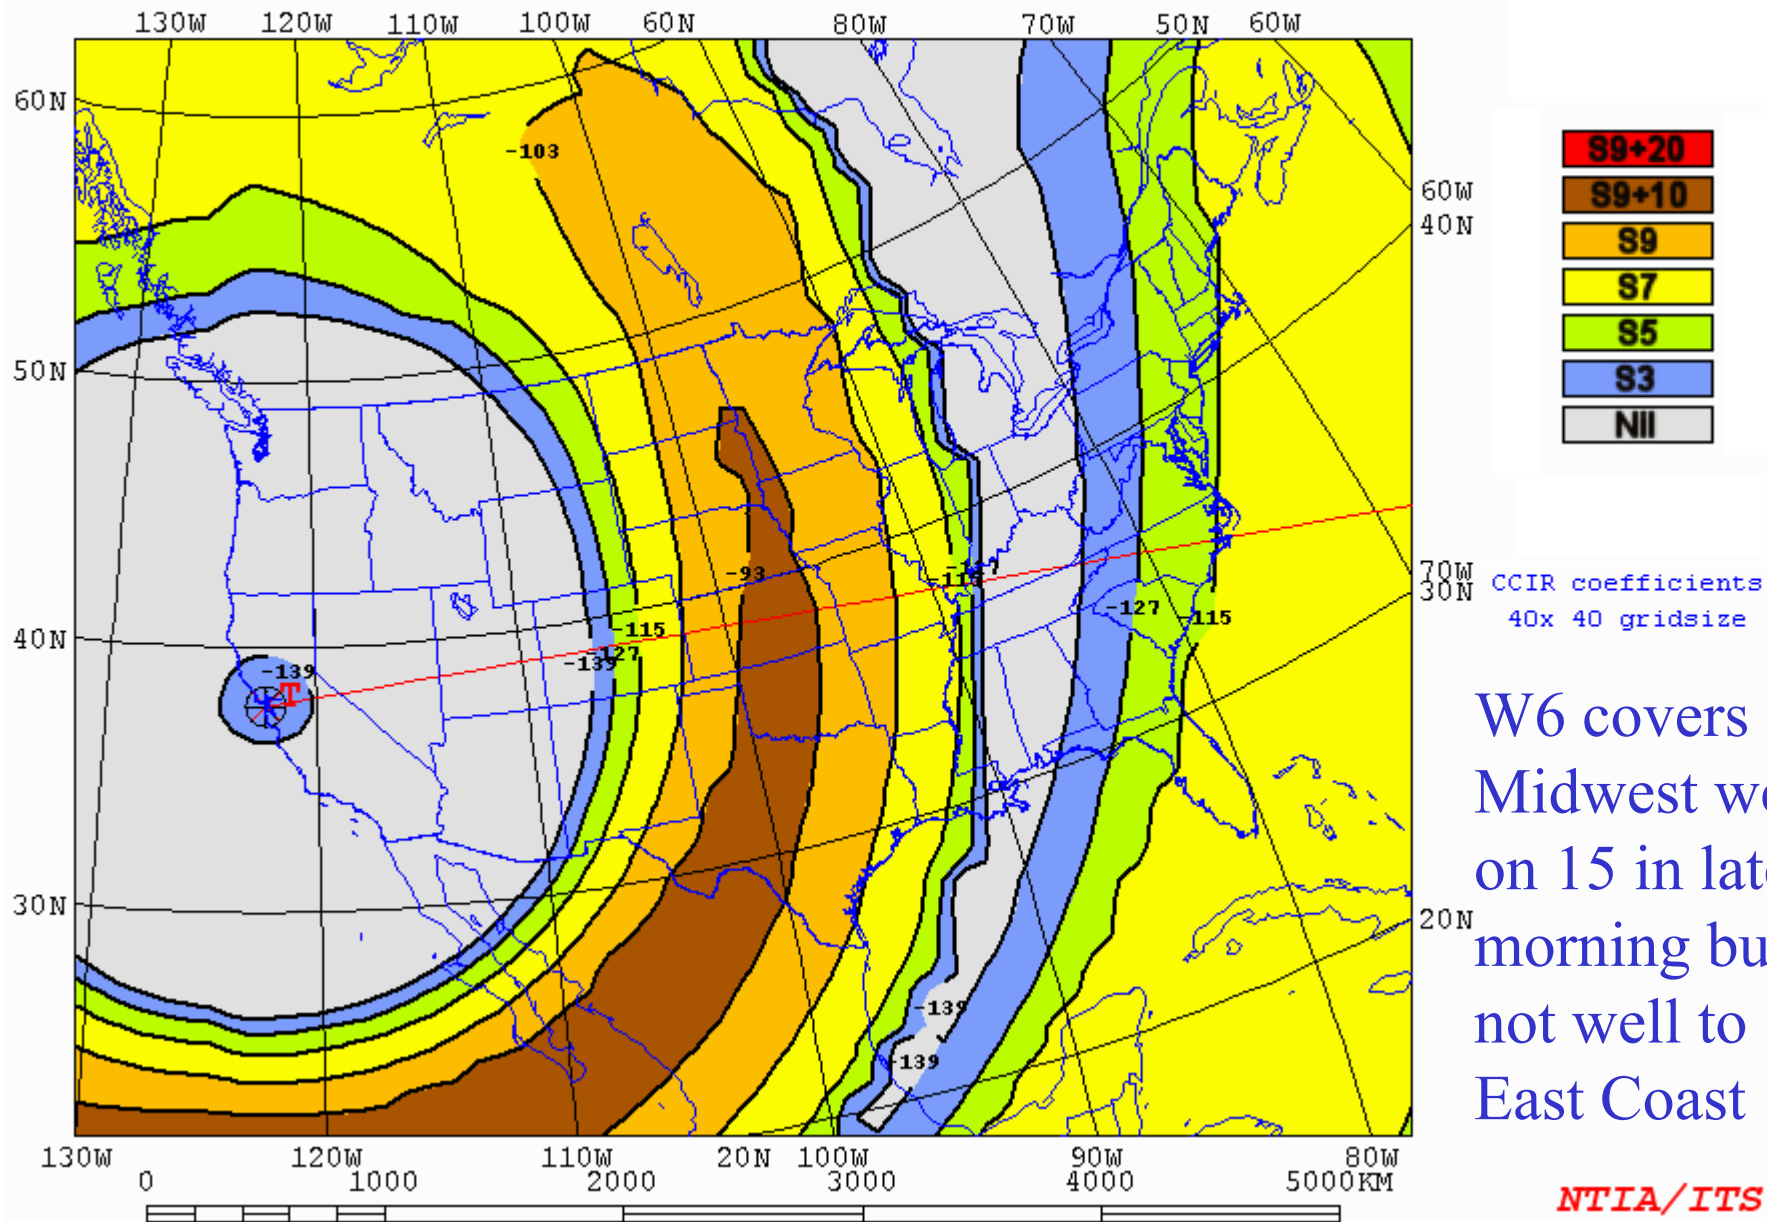



15-Meter Movie Sequence



- 14 to 01 UTC (W6 sunrise at at 1443 UTC to sunset at 0103 UTC).
- Assumes 3-element 15-meter Yagis at each end at 55 feet.
- Assumes 1500 W.

SAN FRANCISCO [3-el Yagi] 1.5kW 80deg 15ut 21.200MHz Nov 10ssn

SDBW

Tx location to grid of Rx

AREADATA\DEFAULT\SF21A.V11

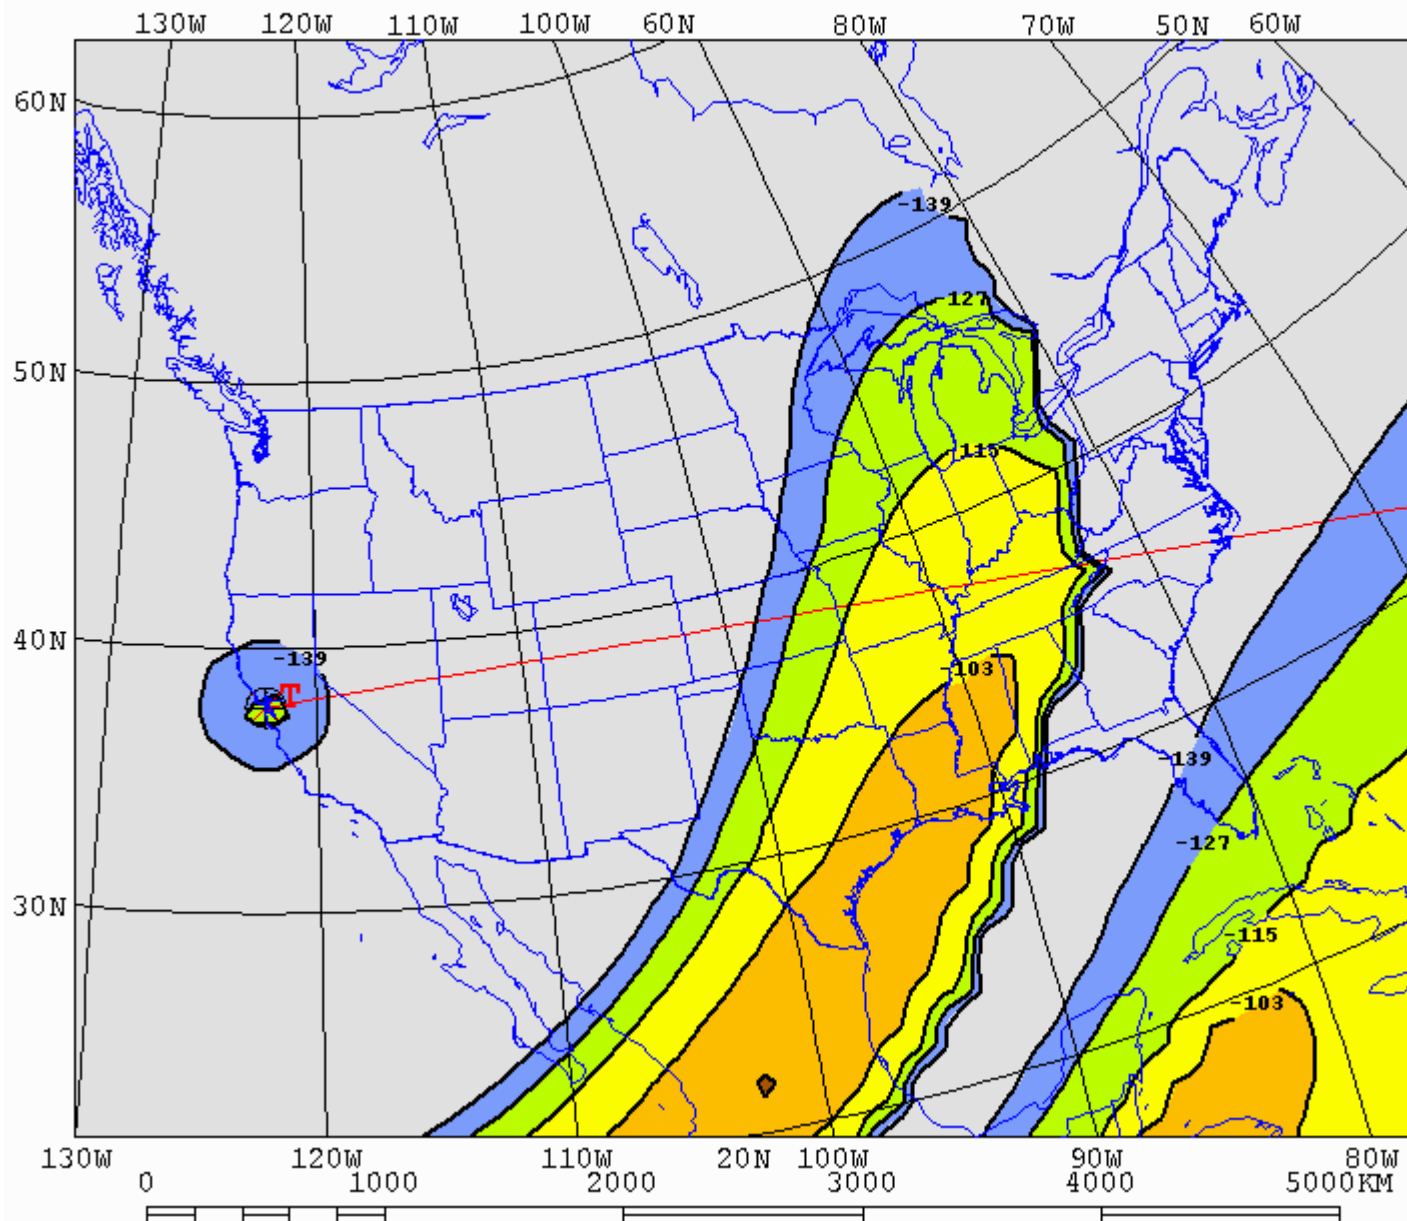



N6BV 2005: 1 Q

Band opens to the SE into Texas

NTIA/ITS

Tx location to grid of Rx

AREADATA\DEFAULT\SF21A.V12

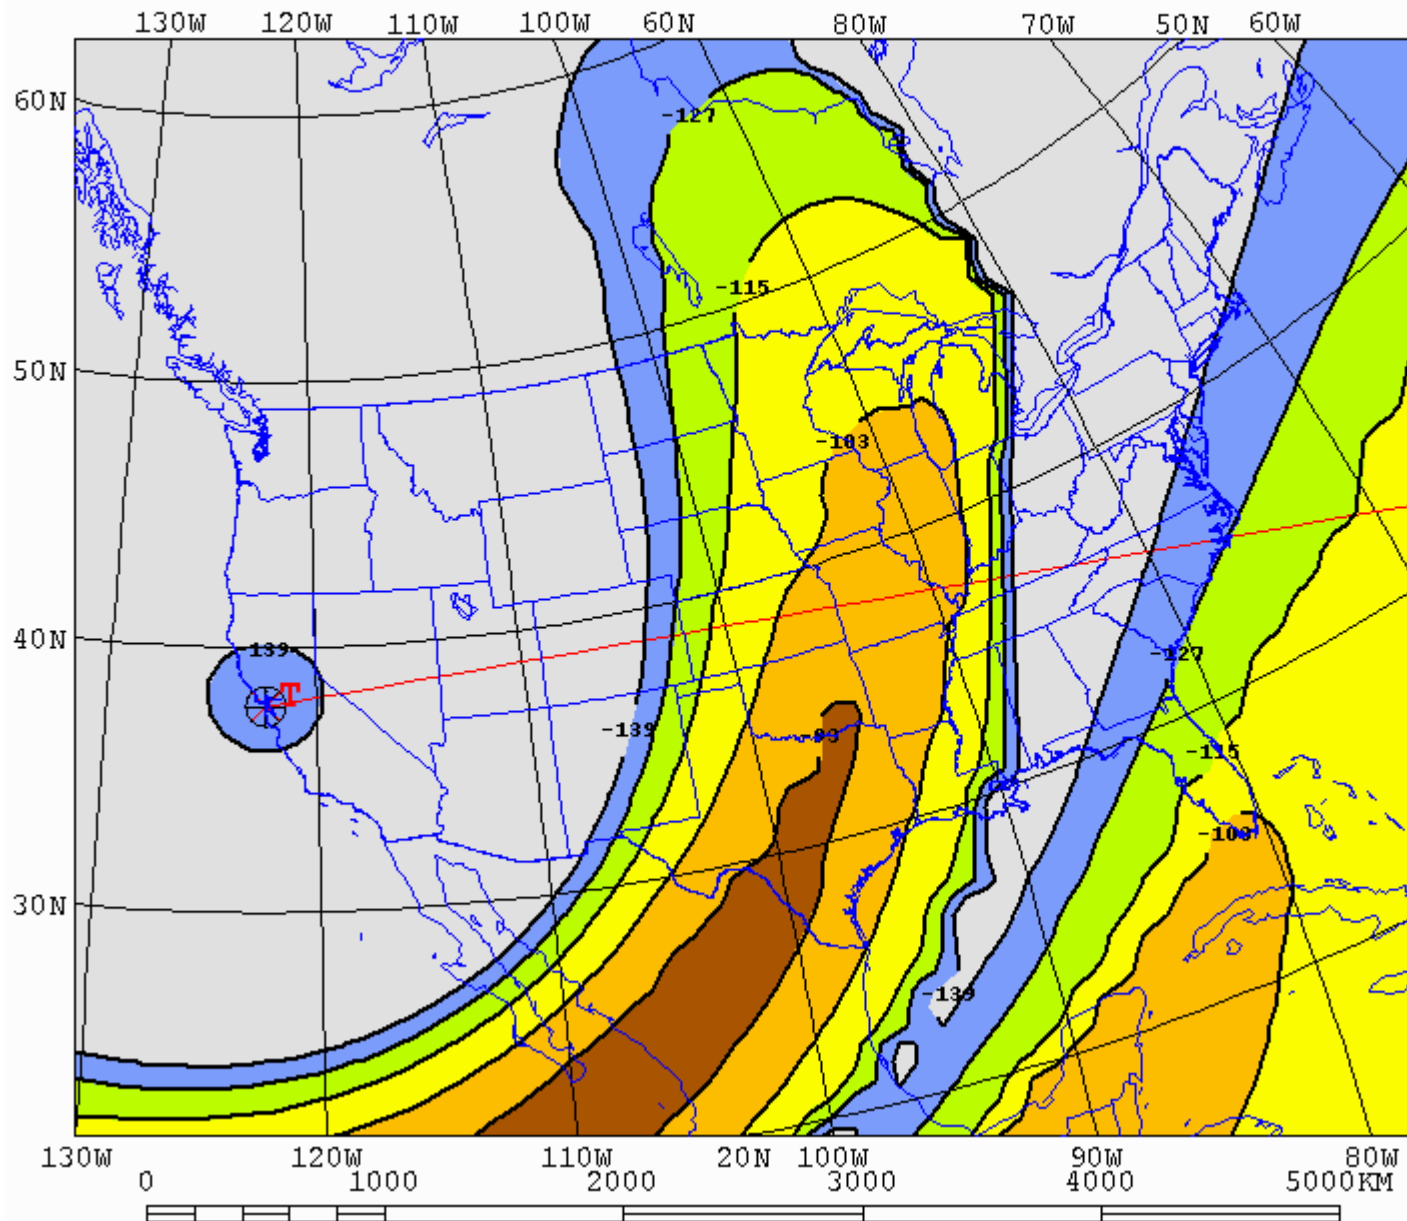


2005: 4 Qs

CCIR coefficients
40x 40 gridsize

Opening to
Midwest


Tx location to grid of Rx

AREADATA\DEFAULT\SF21A.V13

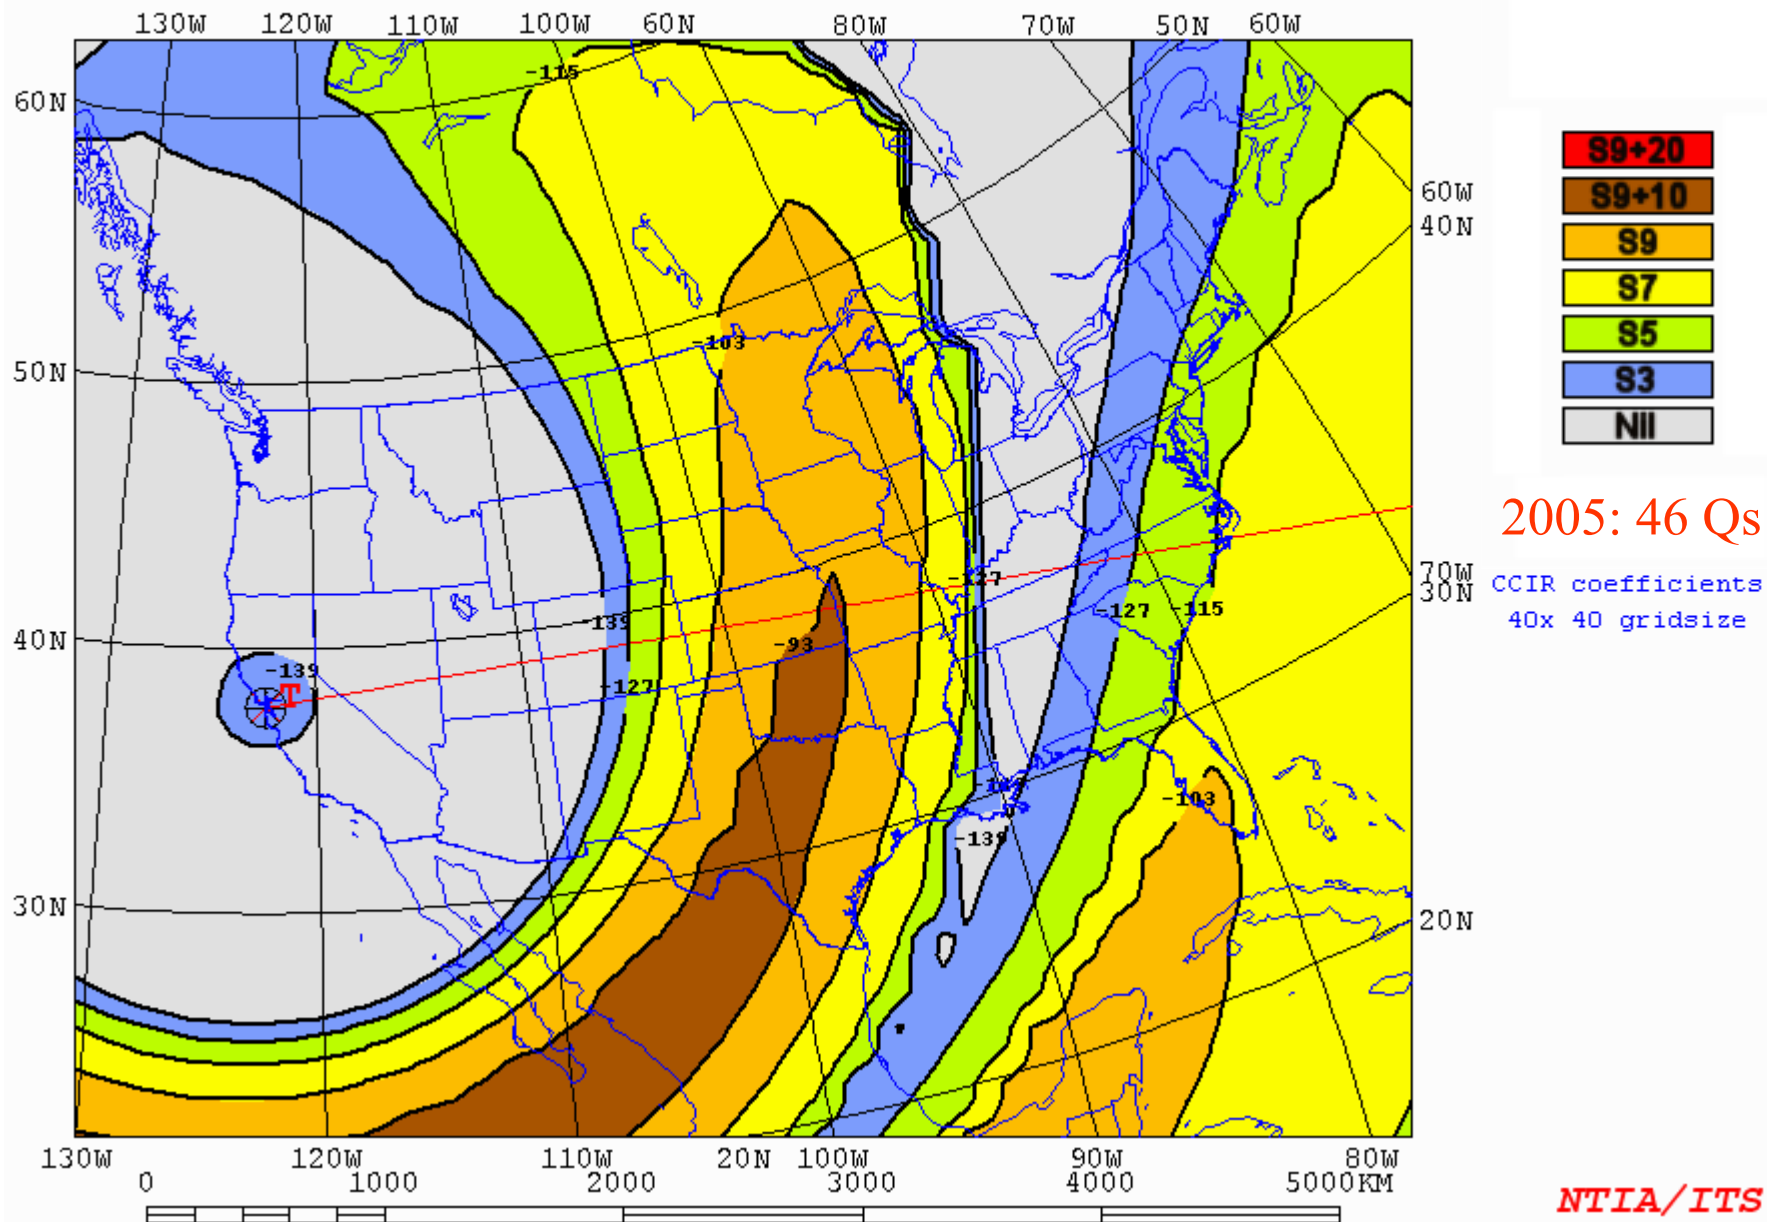


Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V11

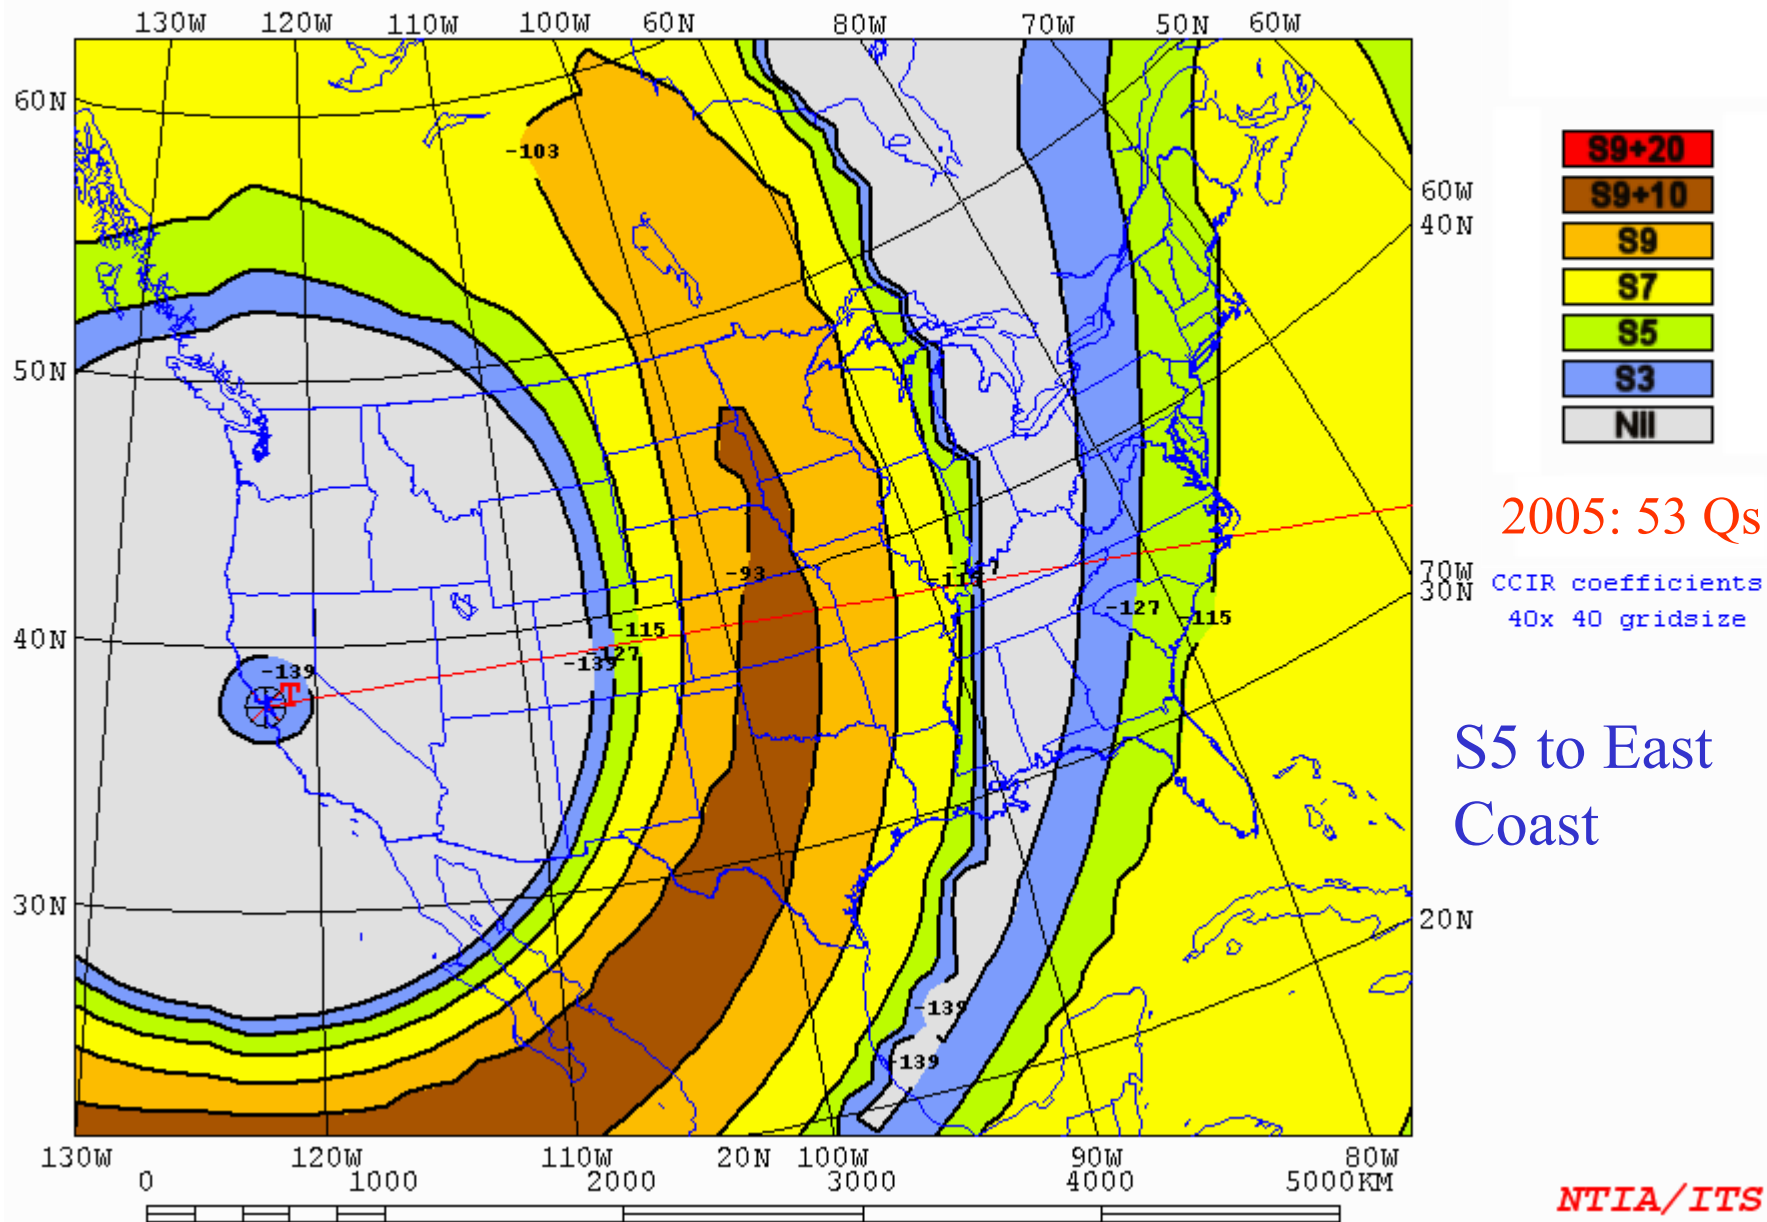


Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V12

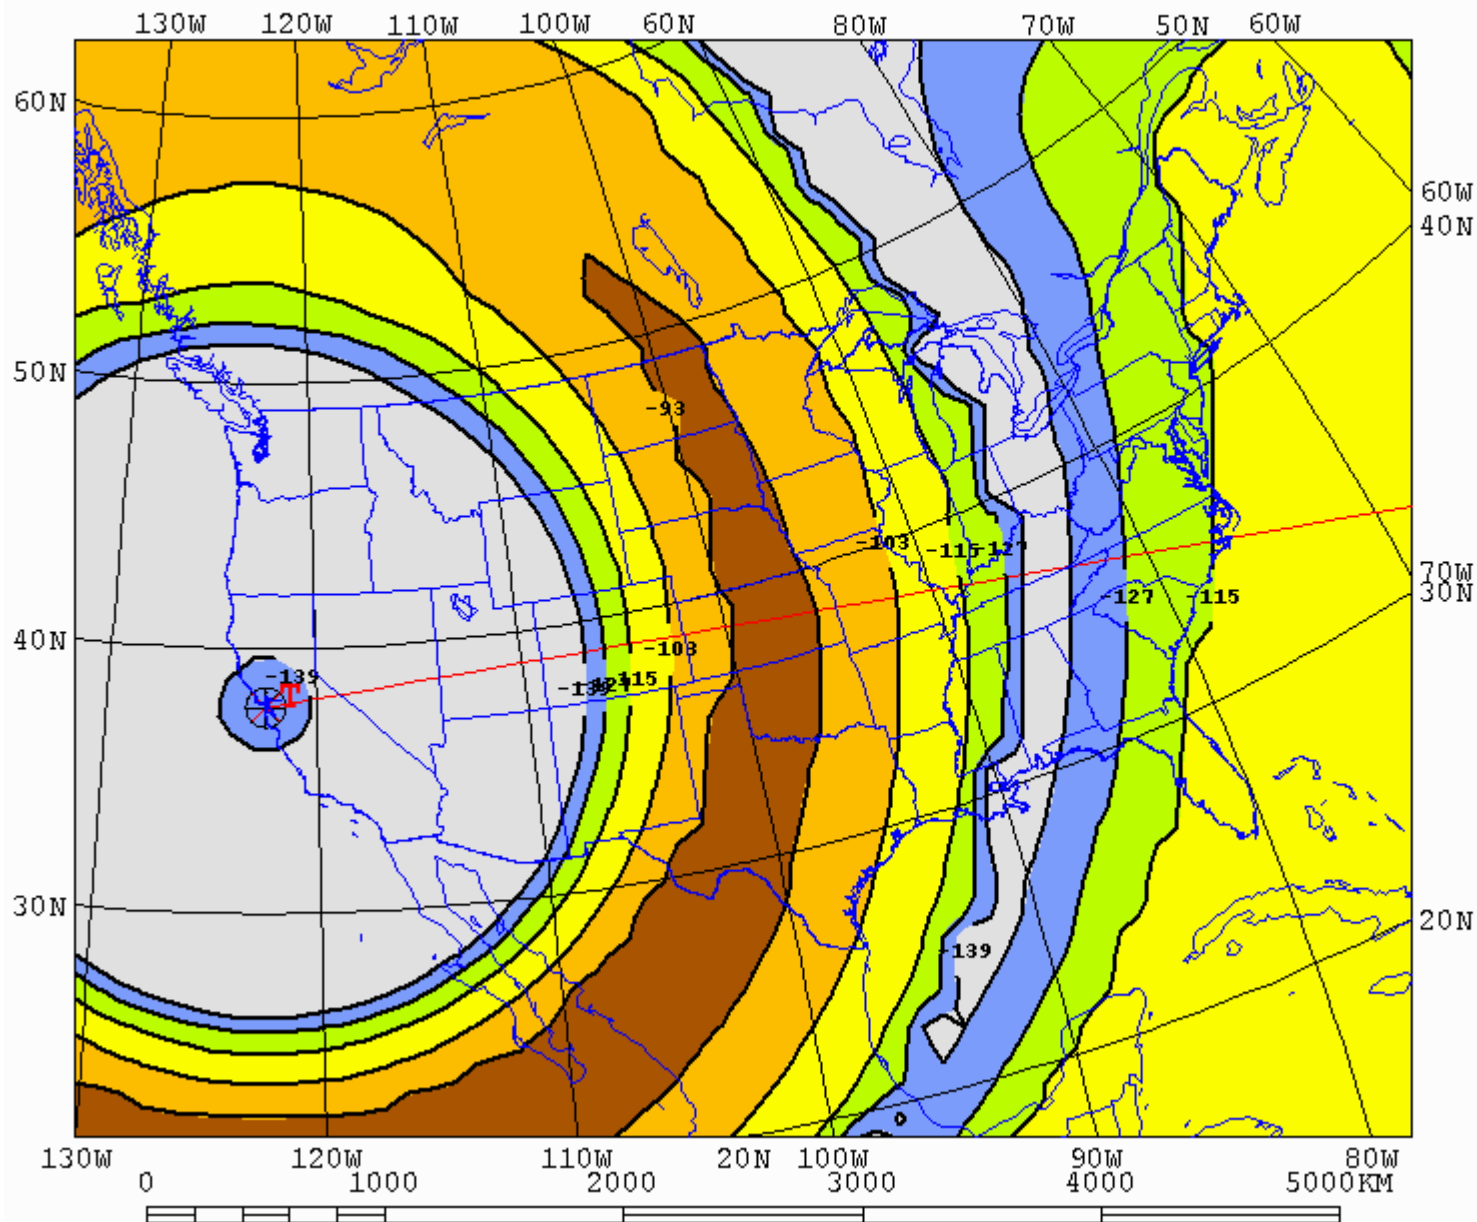



Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V13

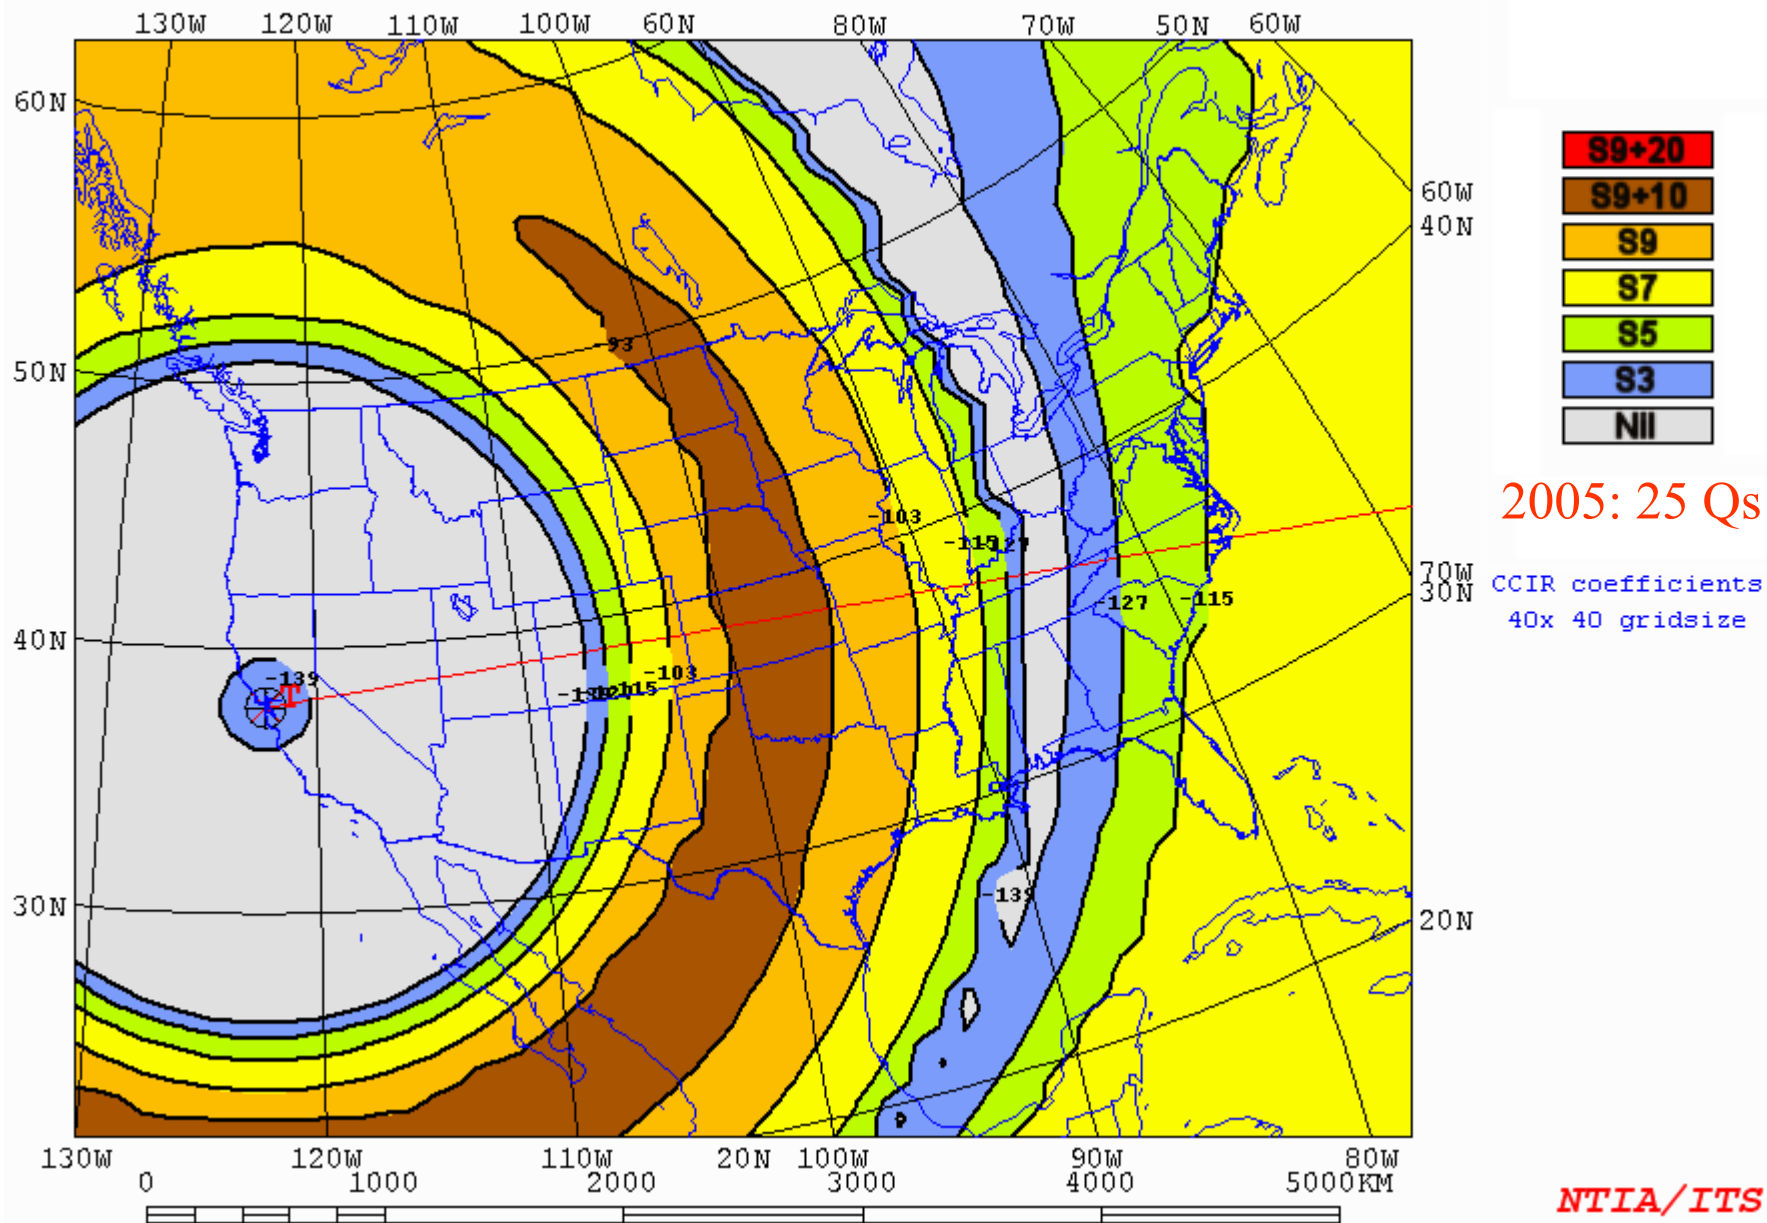

Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V14

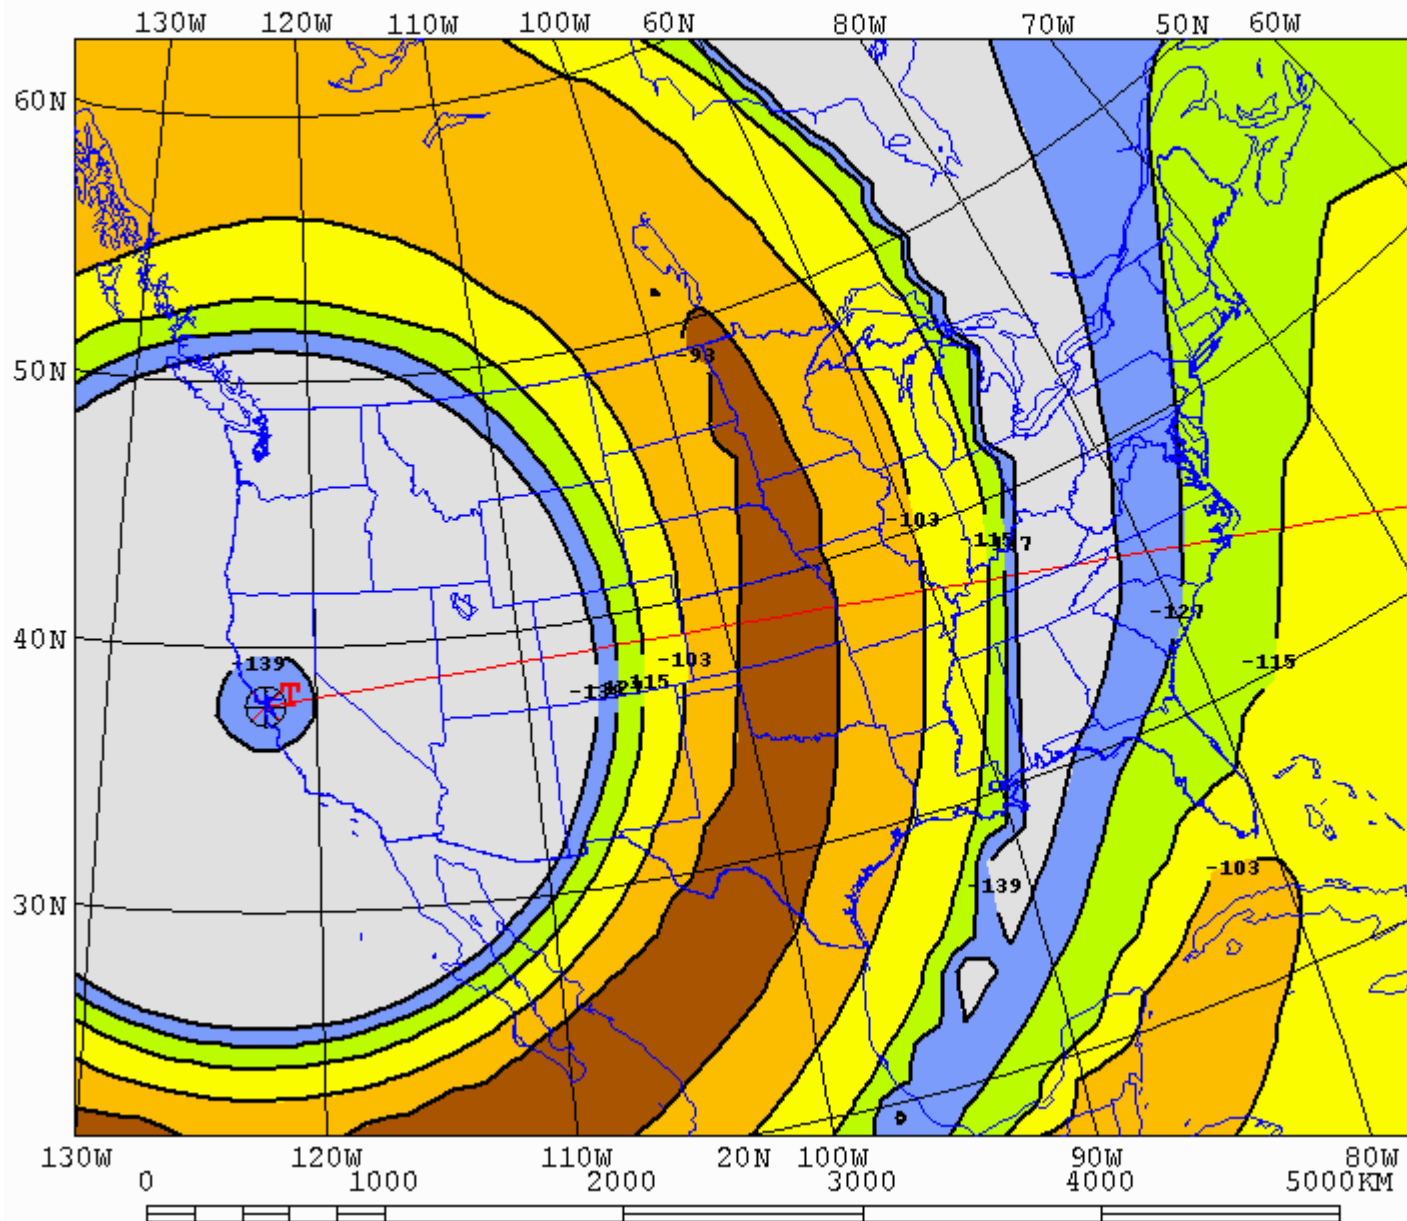


2005: 97/1 Qs

CCIR coefficients
40x 40 gridsize

Midwest is
best place
where
there's some
action


Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V15

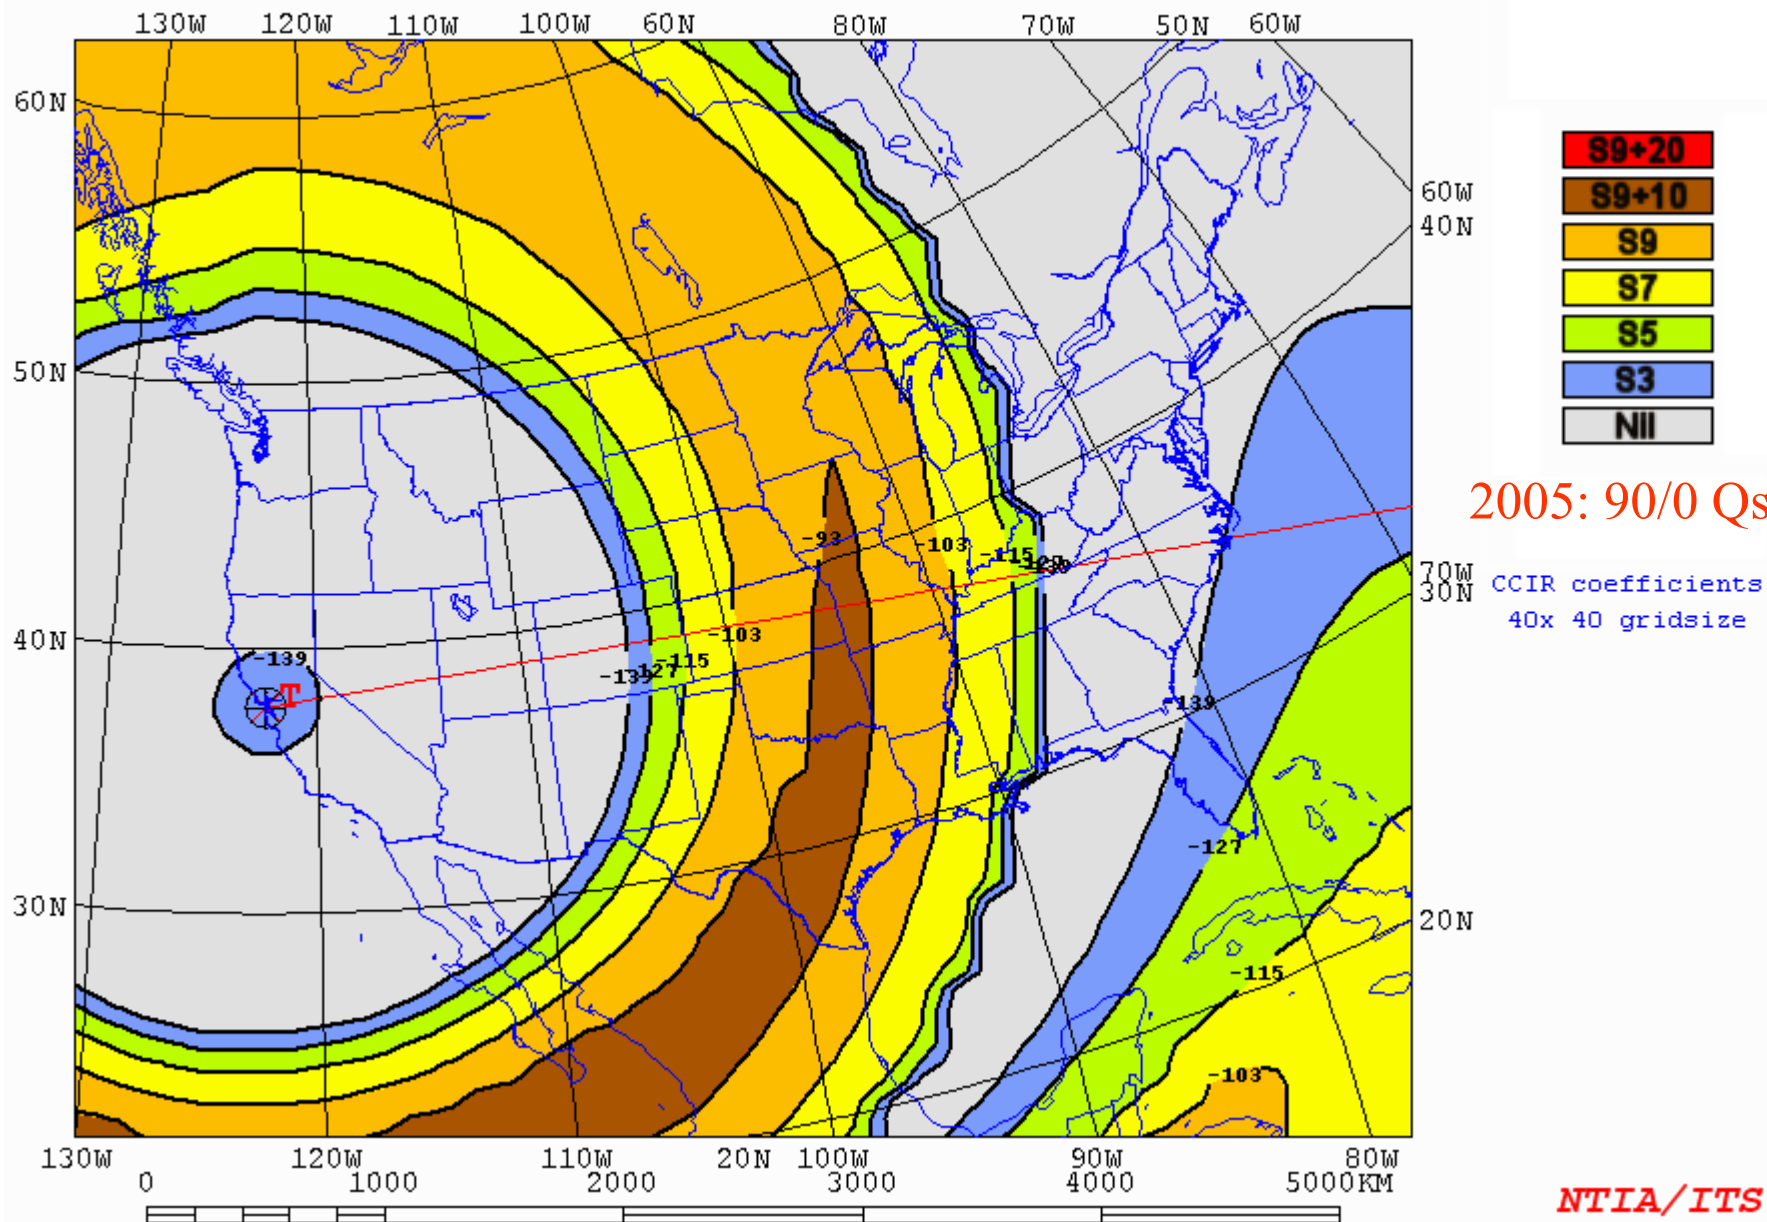

Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V16

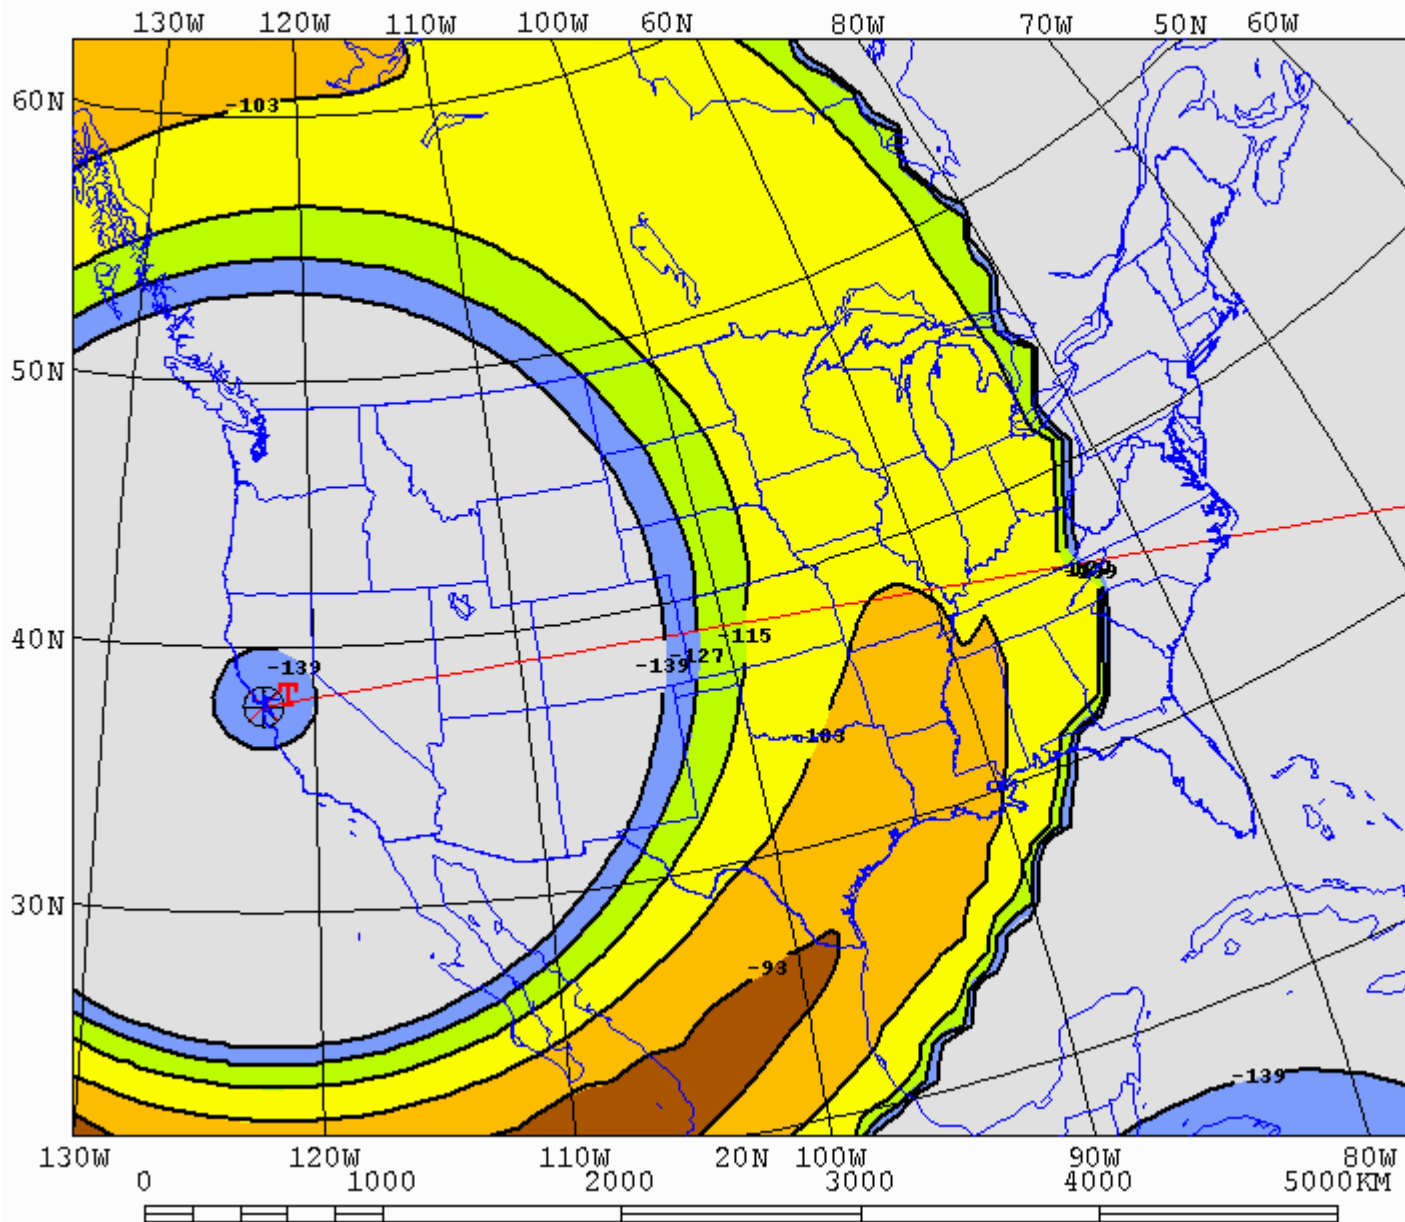


2005: 0/0 Qs

CCIR coefficients
40x 40 gridsize

Fading even
in Midwest



Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V17

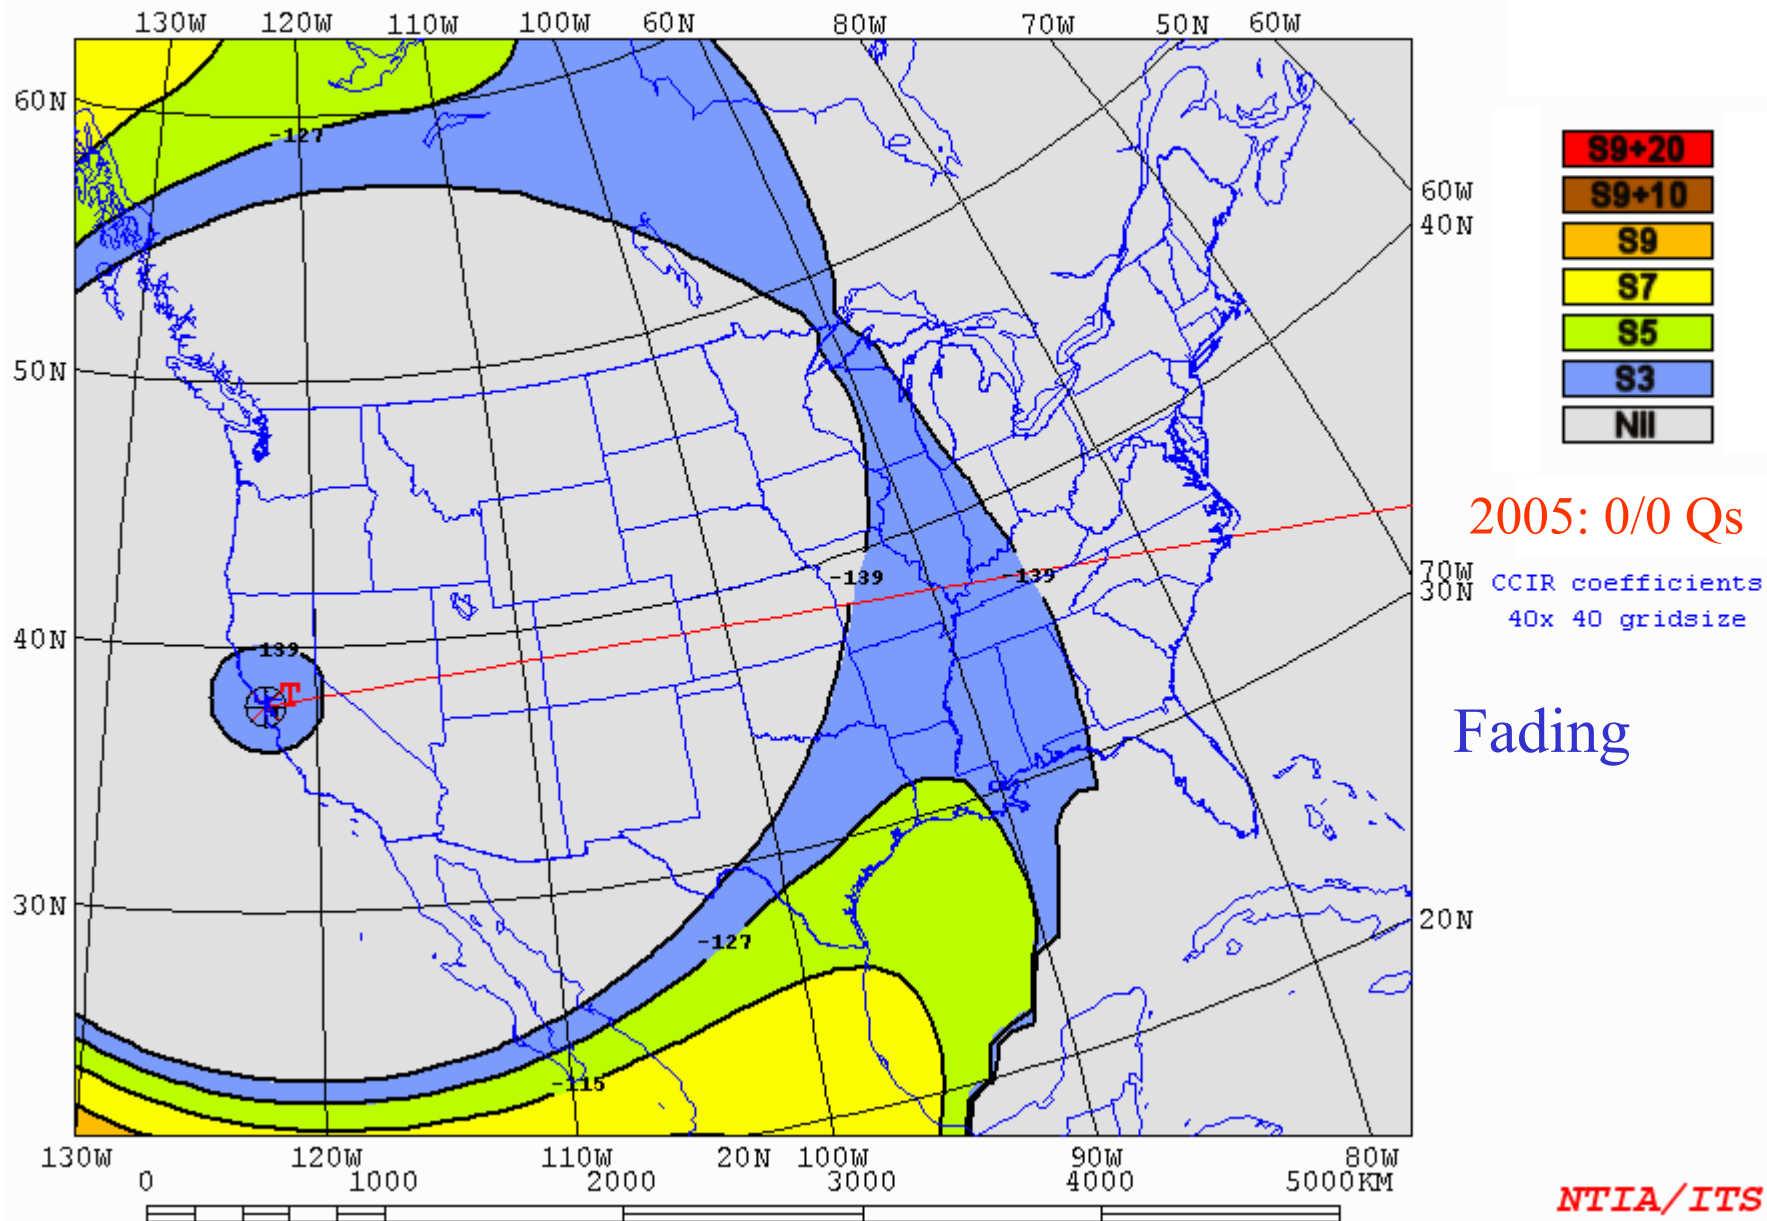

Tx location to grid of Rx

AREADATA\DEFAULT\SF21.V18

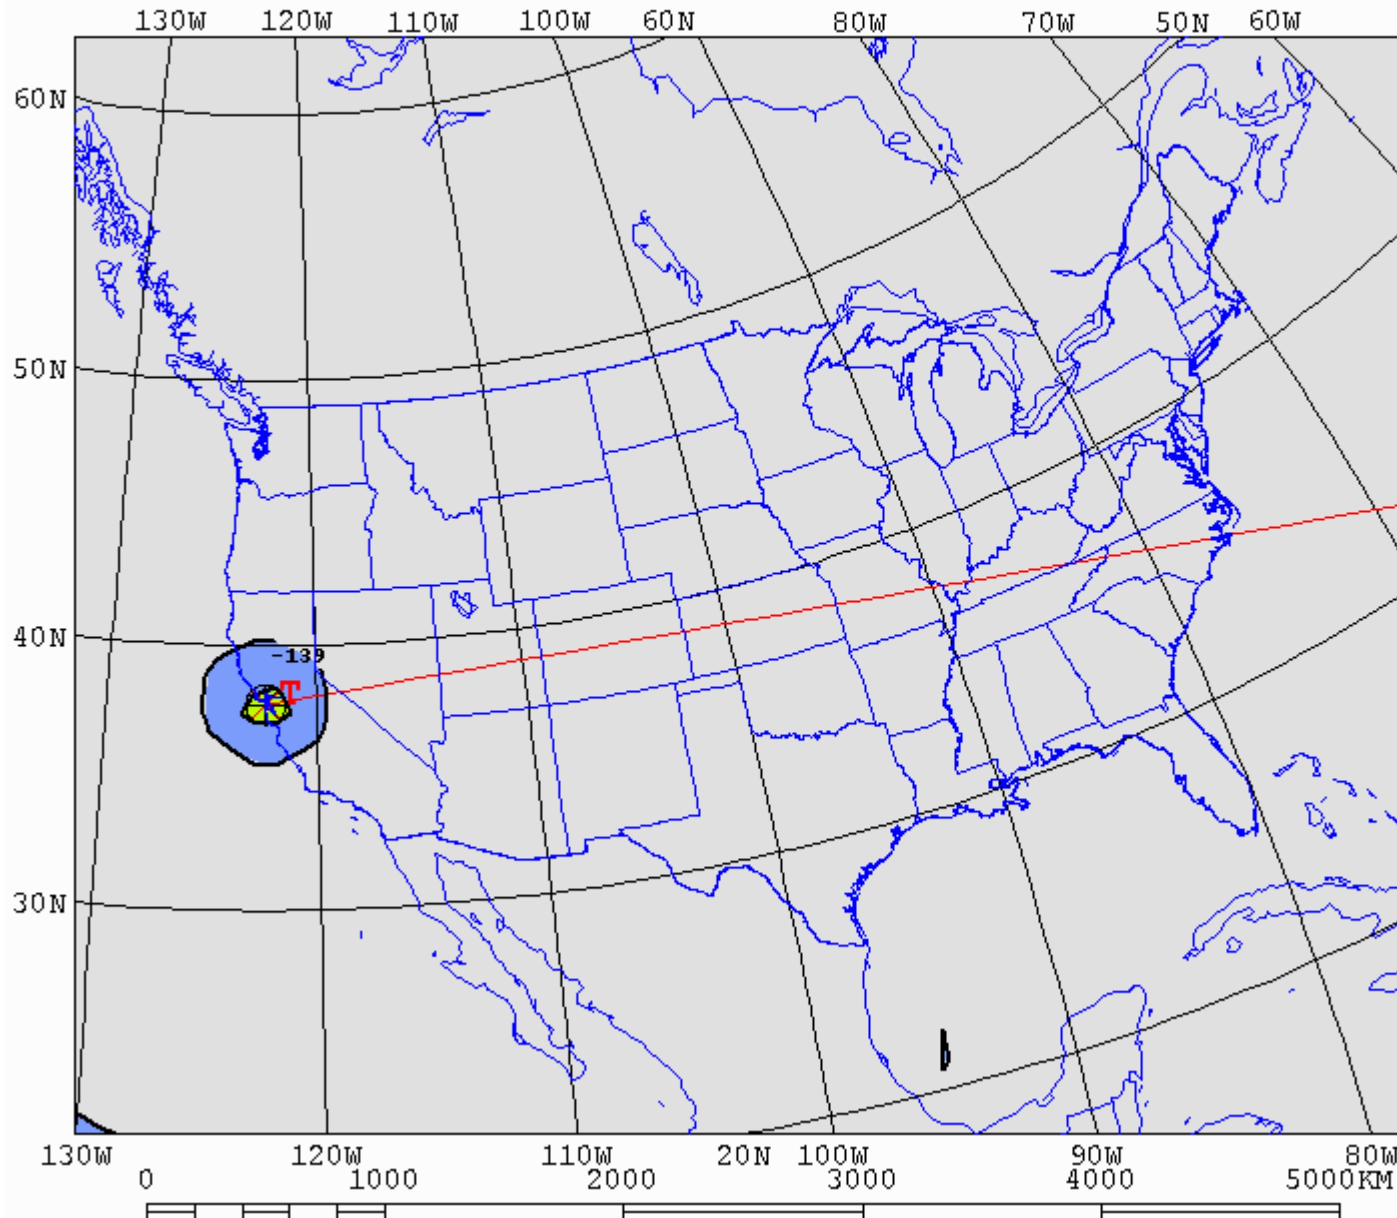

2005: 0/0 Qs

CCIR coefficients
40x 40 gridsize

Gone...



What About Power?


- Compare area-coverage plots for 20 meters at 18 UTC for 100 W and for 1500 W.
- And what about QRP ?

SAN FRANCISCO [3-el Yagi] 100W 80deg 18ut 14.200MHz Nov 10ssn

SDBW

Tx location to grid of Rx

AREADATA\DEFAULT\SF14100.V11

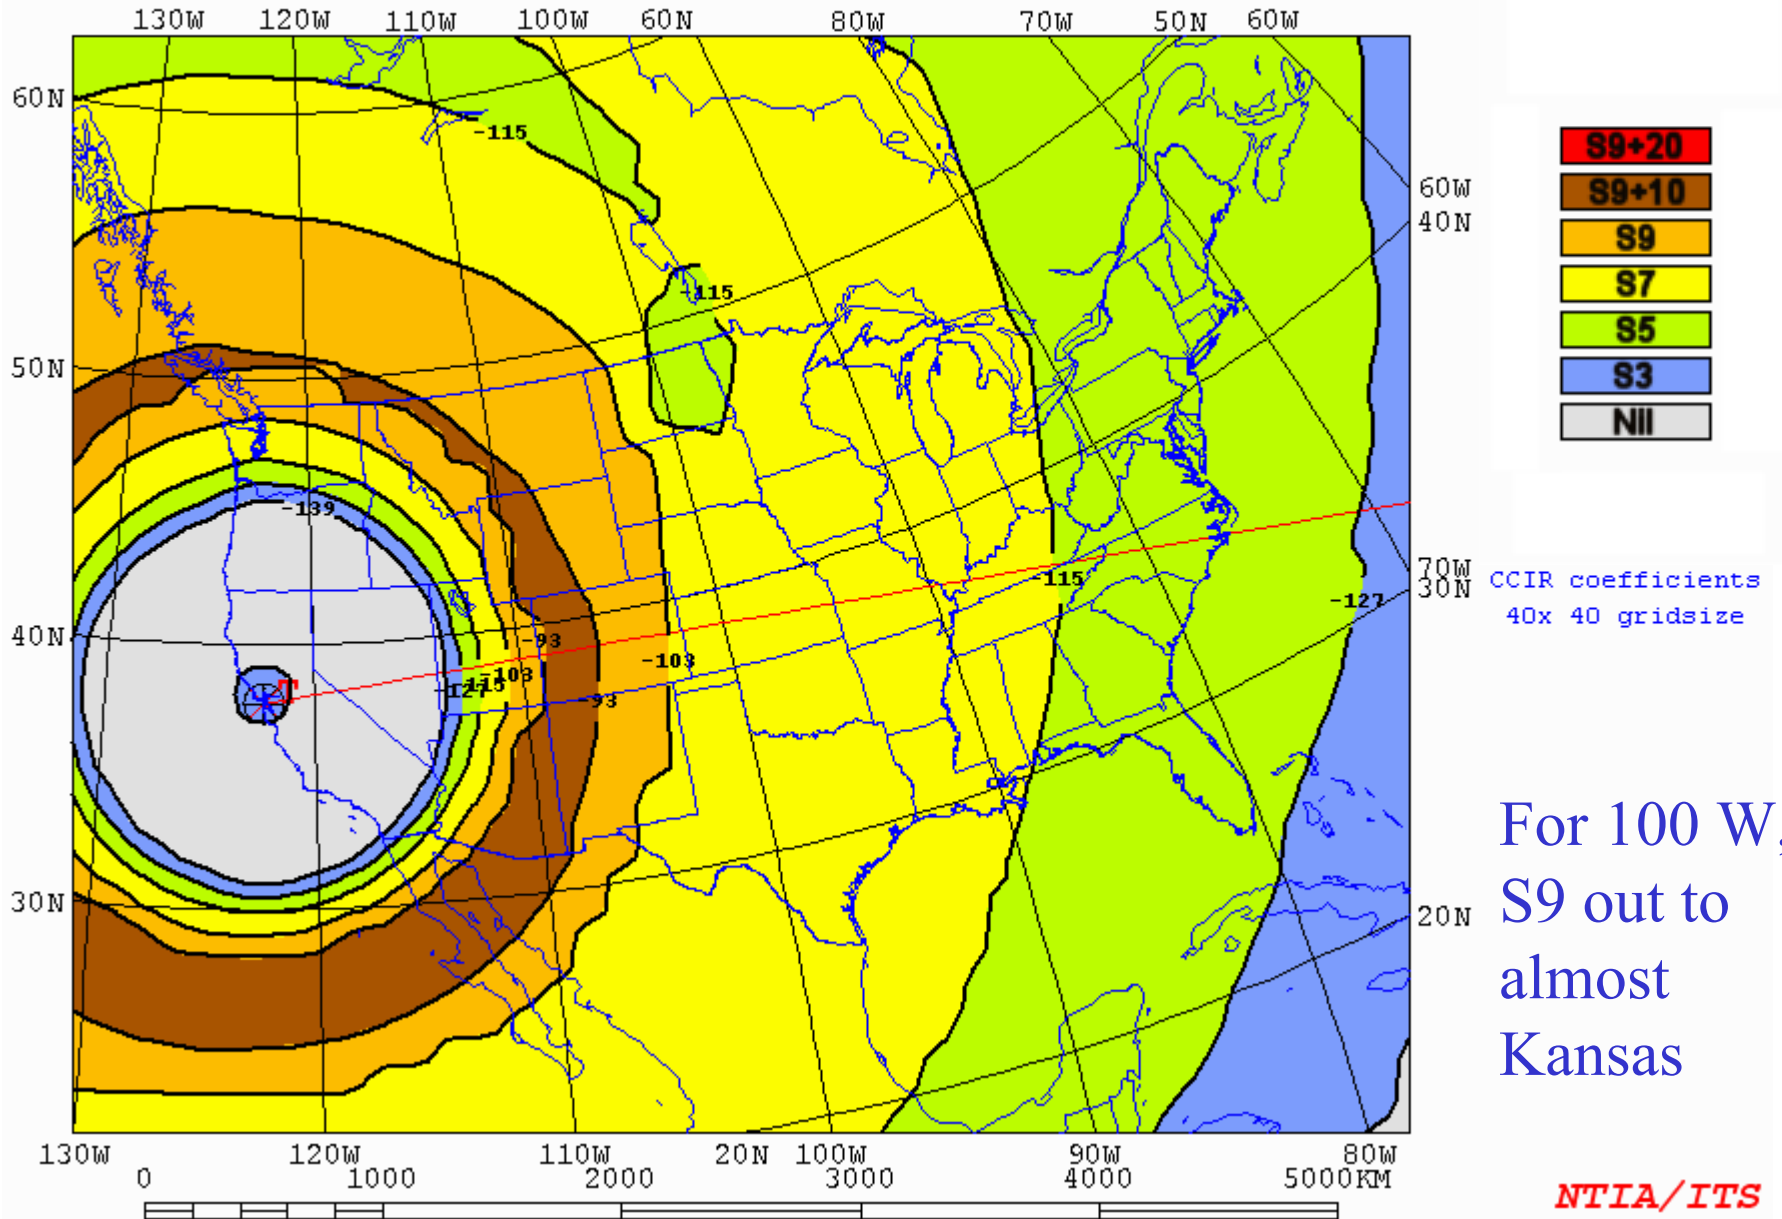


SAN FRANCISCO [3-el Yagi] 5W 80deg 18ut 14.200MHz Nov 10ssn

SDBW

Tx location to grid of Rx

AREADATA\DEFAULT\SF14QRP.V11

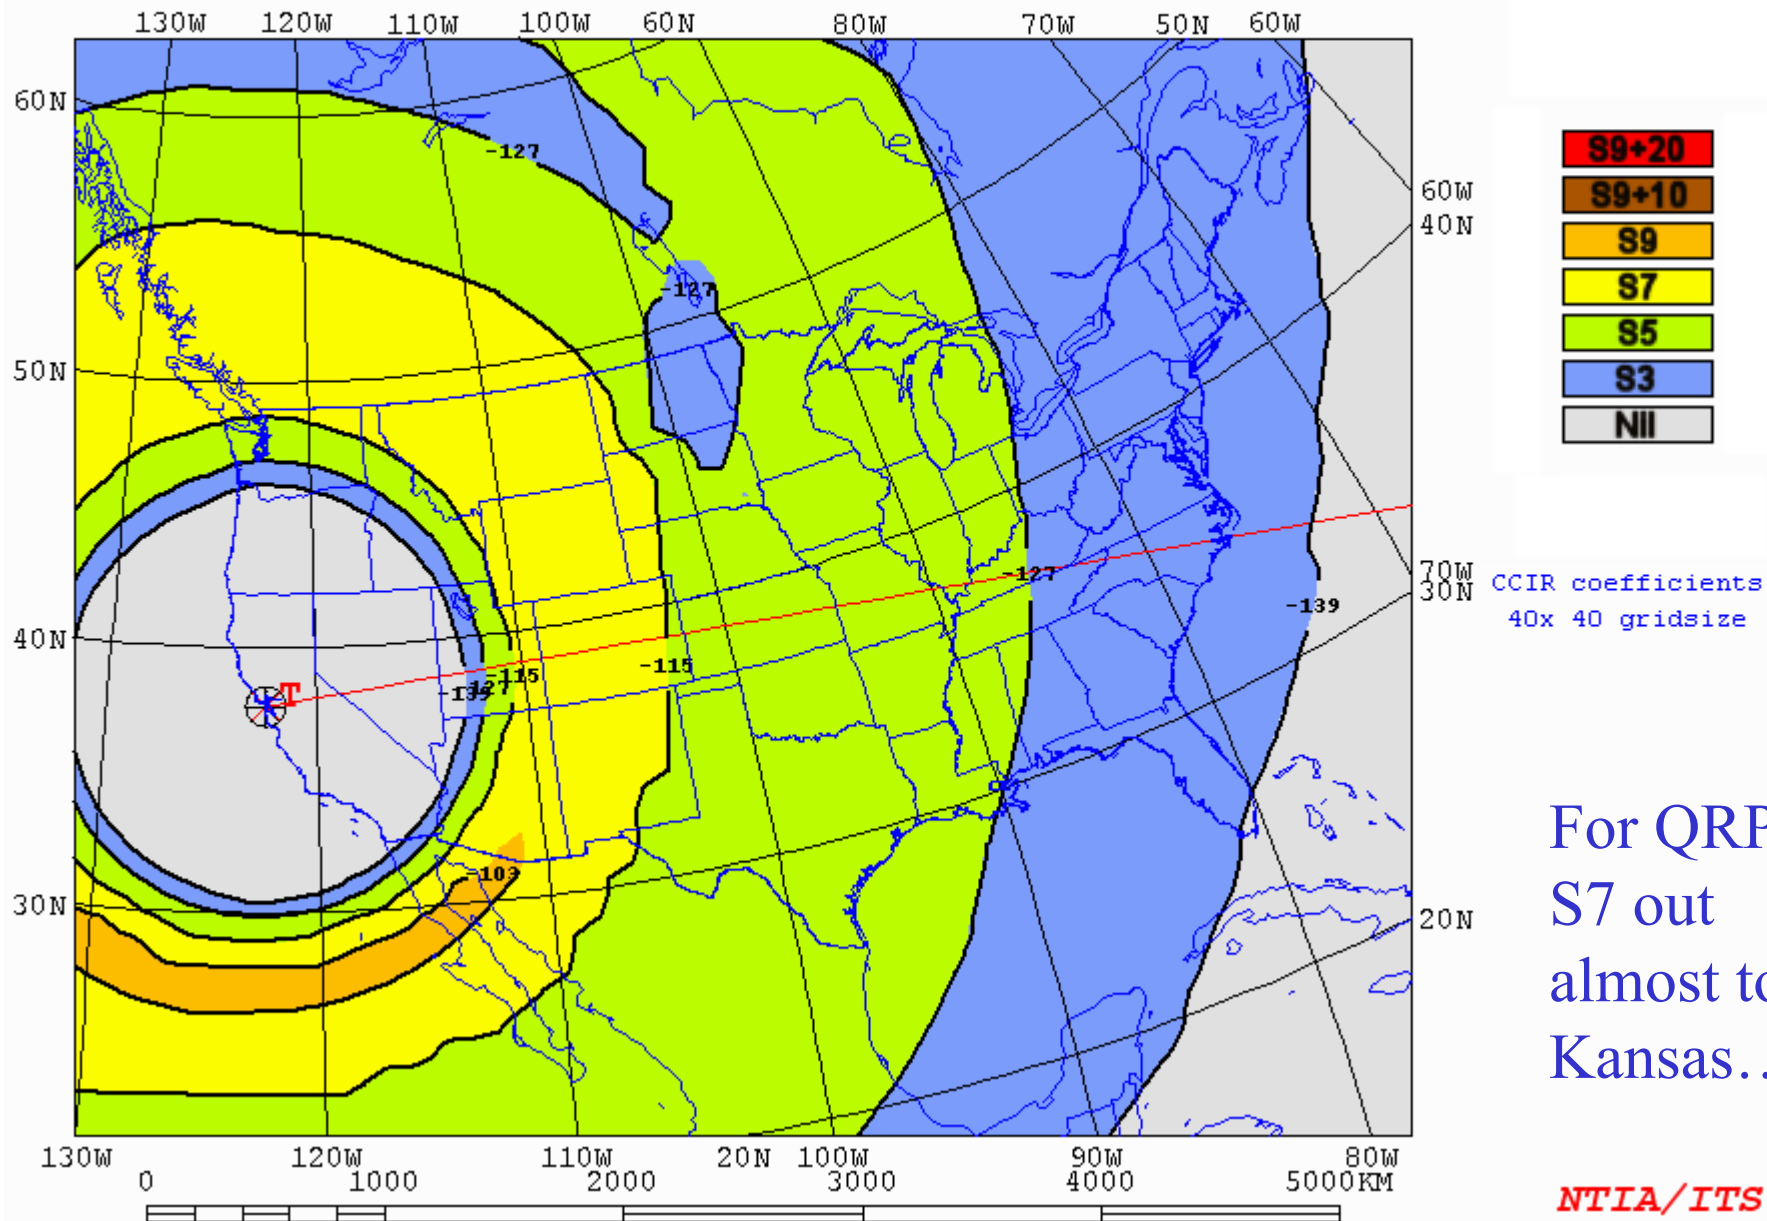




“Omnidirectional” Antennas

- The plots here have assumed “omnidirectional” antennas, a misnomer. This assumes that a directional antenna can actually be pointed at azimuth angles of interest.
- For flat terrain, I model antennas with *EZNEC* and then convert to 2D *VOAAREA* type *.11 files using *MultiNEC* by AC6LA.
- For complex terrains, I use *HFTA* and convert to a 2D *VOAAREA* *.11 file using *MAKEVOA*.

Tx location to grid of Rx

AREADATA\default\temp.V11

Antenna pattern is “omnidirectional” (propagation is not...)

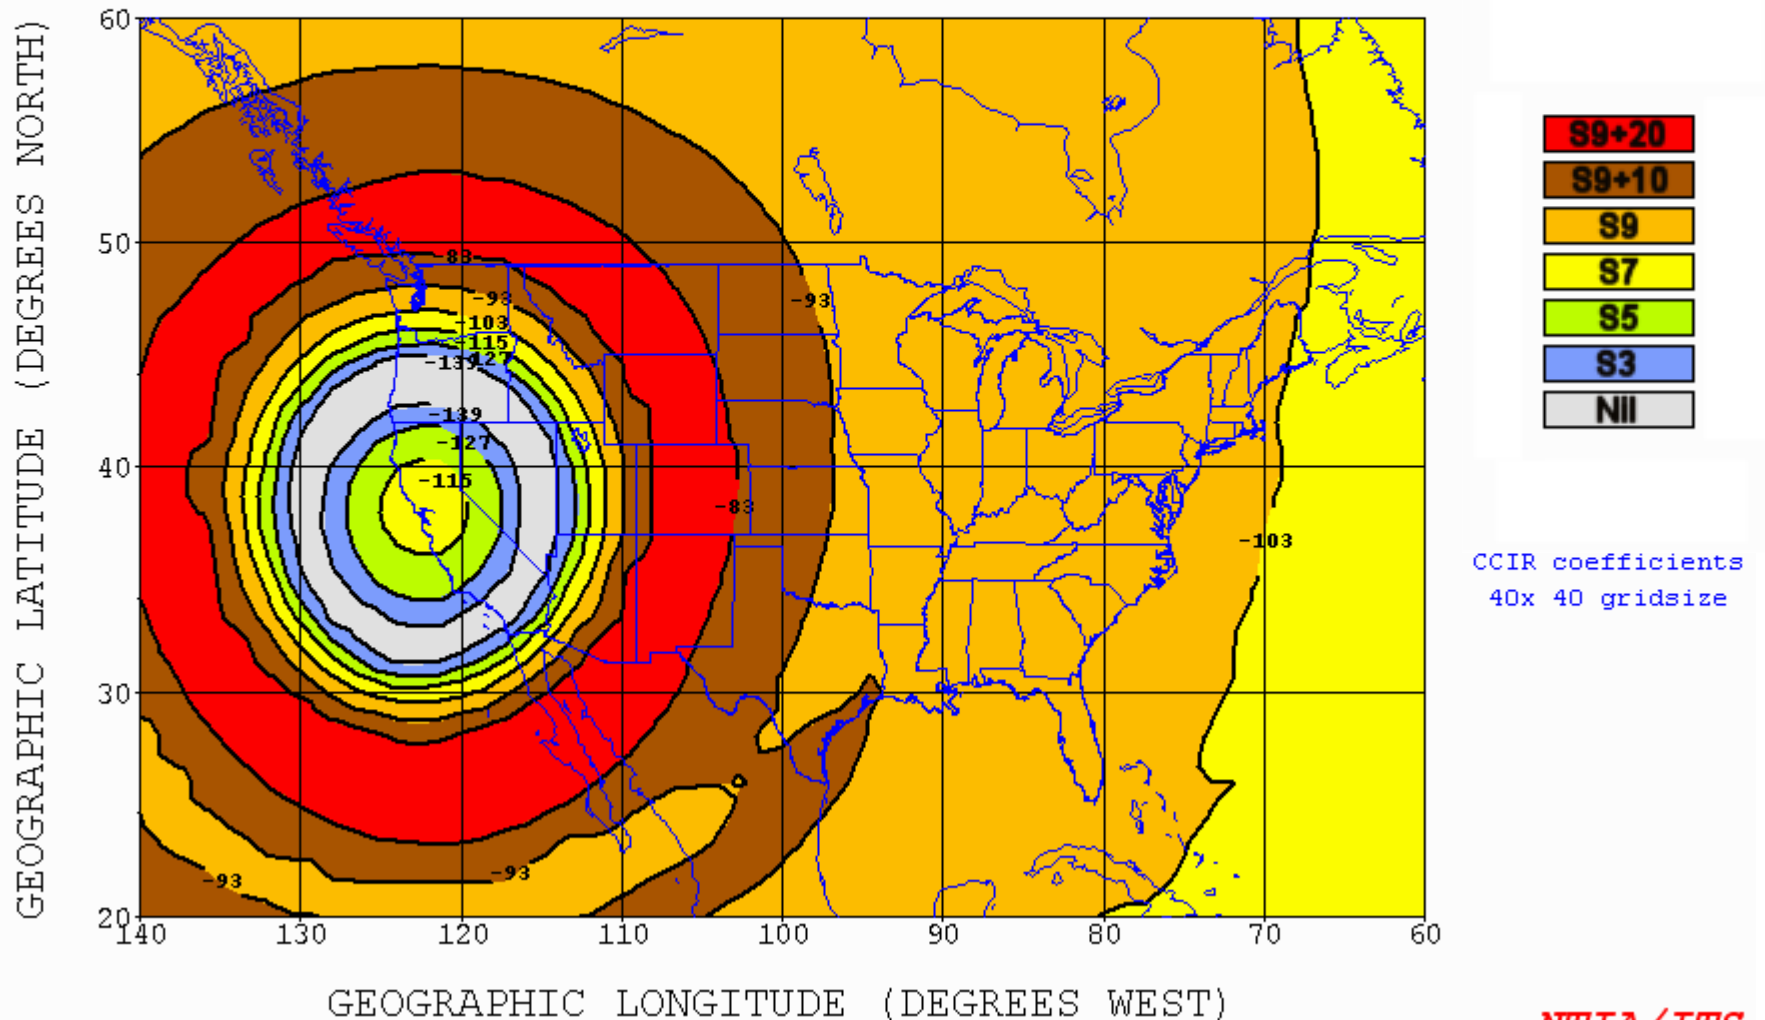



Customizing for Your Antennas

- What kind of area coverage do you get for your own antennas?
- I am very fortunate to use the super station at N6RO for Sweepstakes Phone.
- N6RO has Yagi stacks on 10, 15, 20 and 40 meters. These have significantly more gain than the 3-element Yagis in the previous plots.




Customizing for Your Antennas

- Directional patterns only work for flat-ground terrain presently.
- I model 3D type *.13 azimuth/elevation patterns using *MultiNEC* by AC6LA with *EZNEC*.

Tx location to grid of Rx

AREADATA\default\temp1.V21

This shows pattern of 40-meter stack at N6RO pointed at 70°

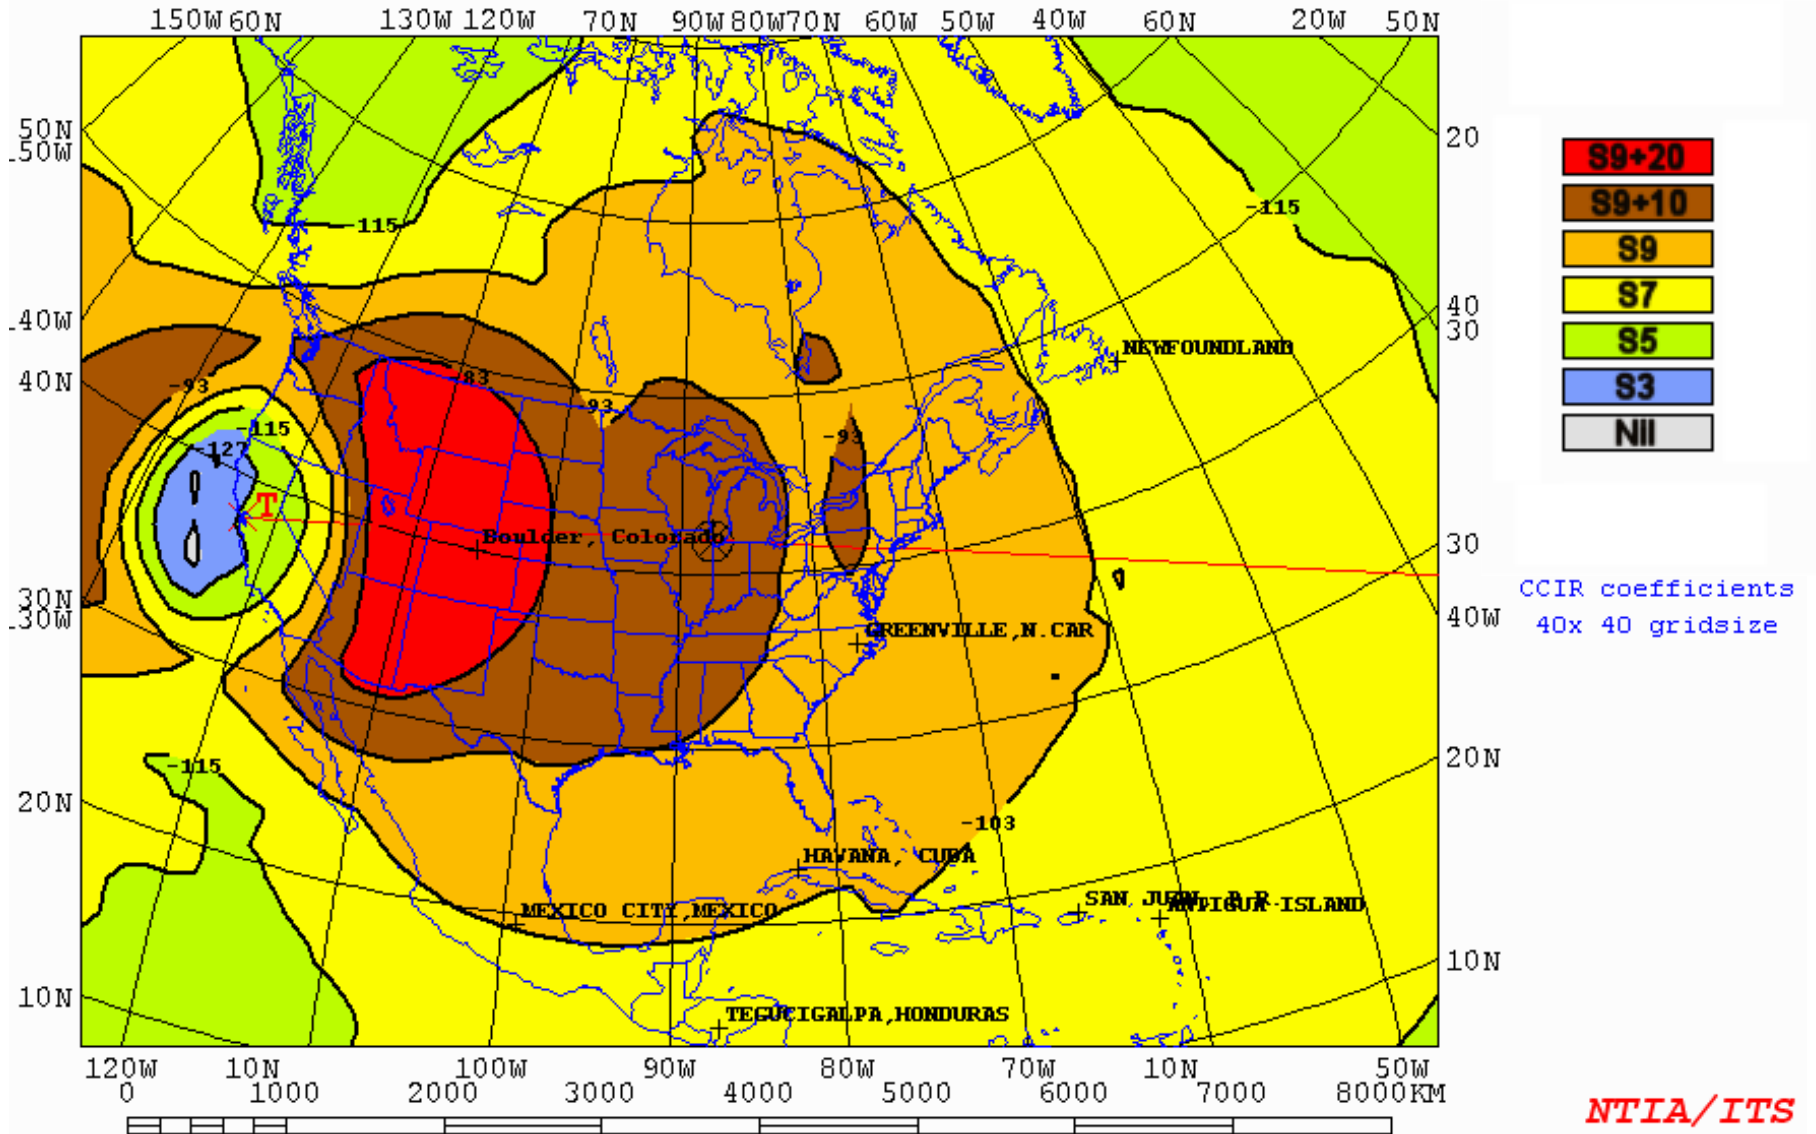



40-Meter Stack at N6RO



This is the *only* way to take down two 4L40 Yagis and replace them with two new M² ones in one day!



35 ton crane with 145' reach –

N6RO, Oct 3, 2005




Planning for a Contest

- The following shows a few slides from a movie I made for myself to guide my band-changing decisions for the 2005 ARRL Sweepstakes phone contest.
- The number of QSOs made in the 2005 SS Phone contest are listed as well.

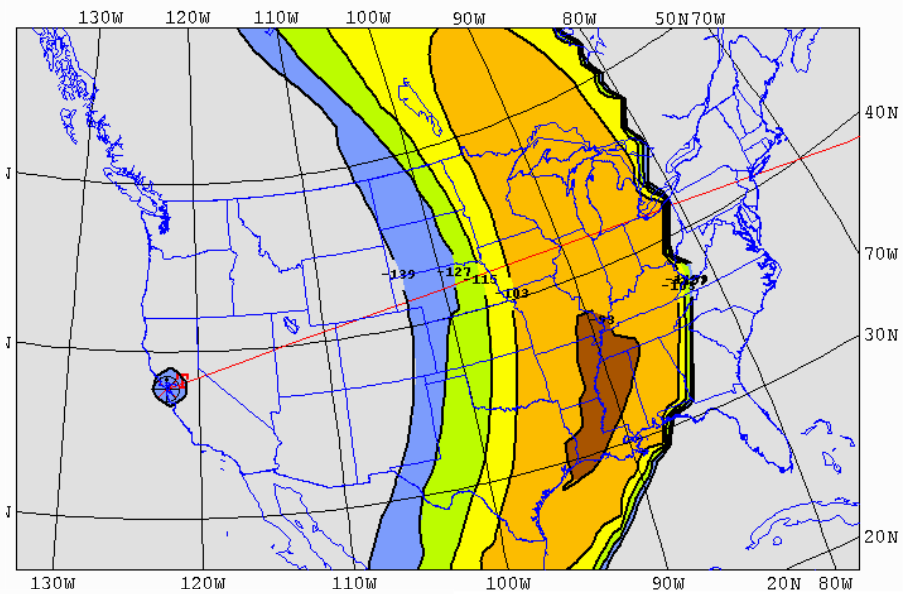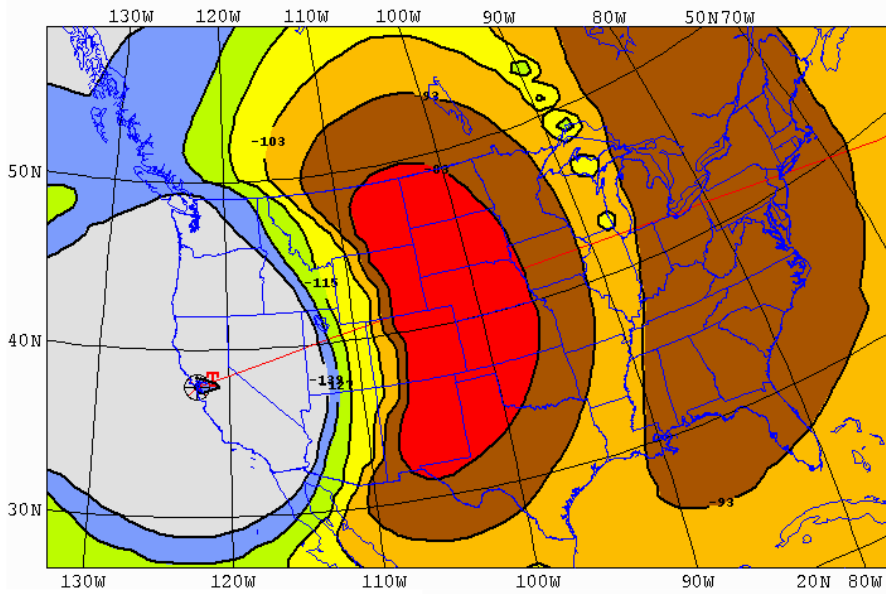



20 m = 150 Qs

15 m

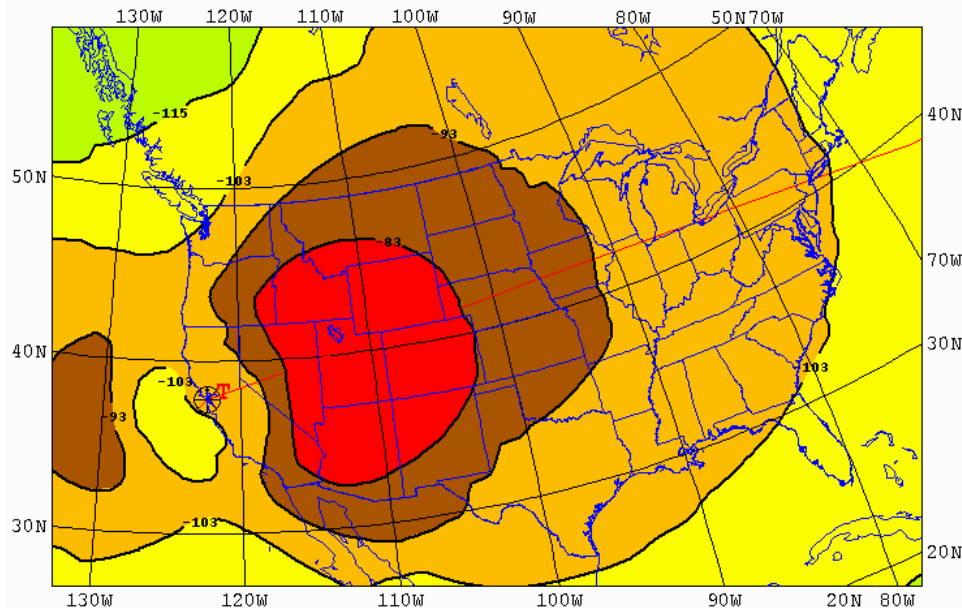


40 m

23 UTC

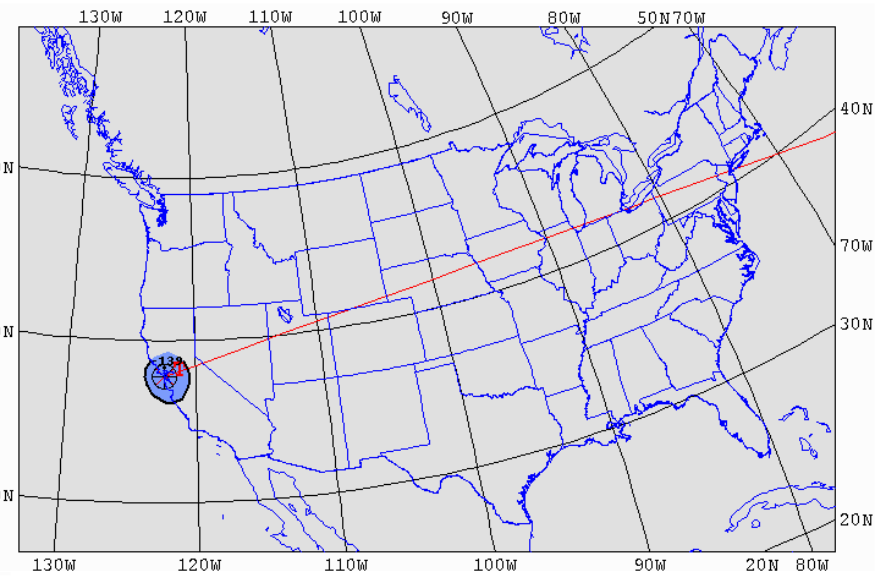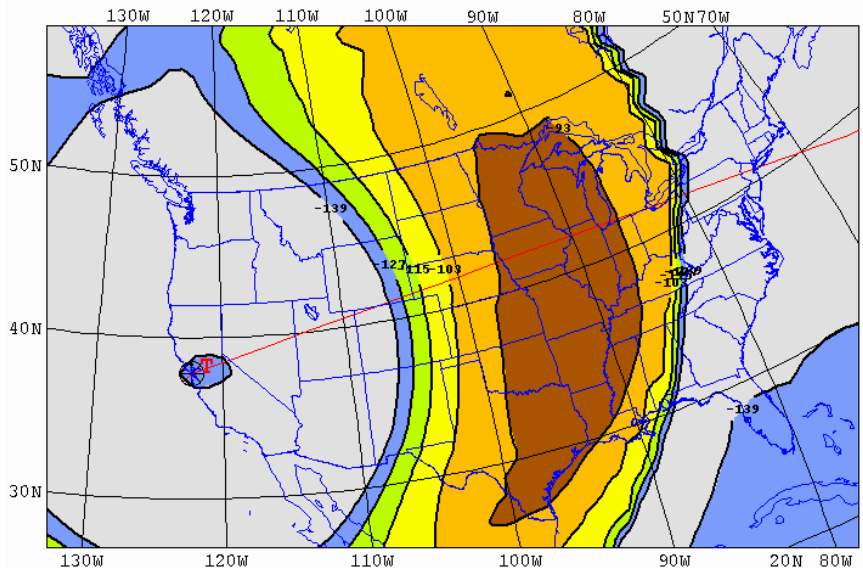

20 m = 24 Qs

15 m

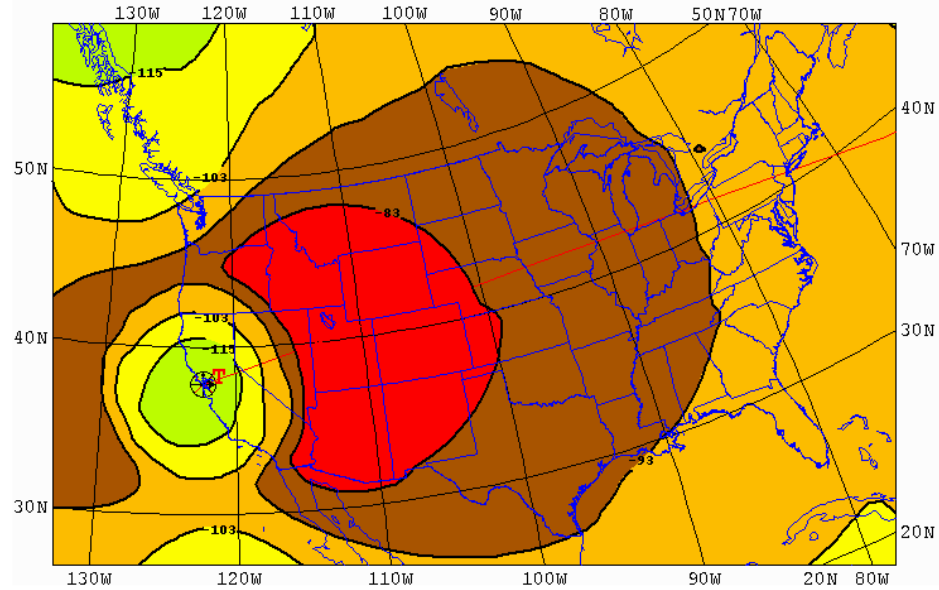


01 UTC

40 m = 59 Qs



How Did Predictions Compare With Reality?


21 UTC on 15 Meters, N6RO Antennas

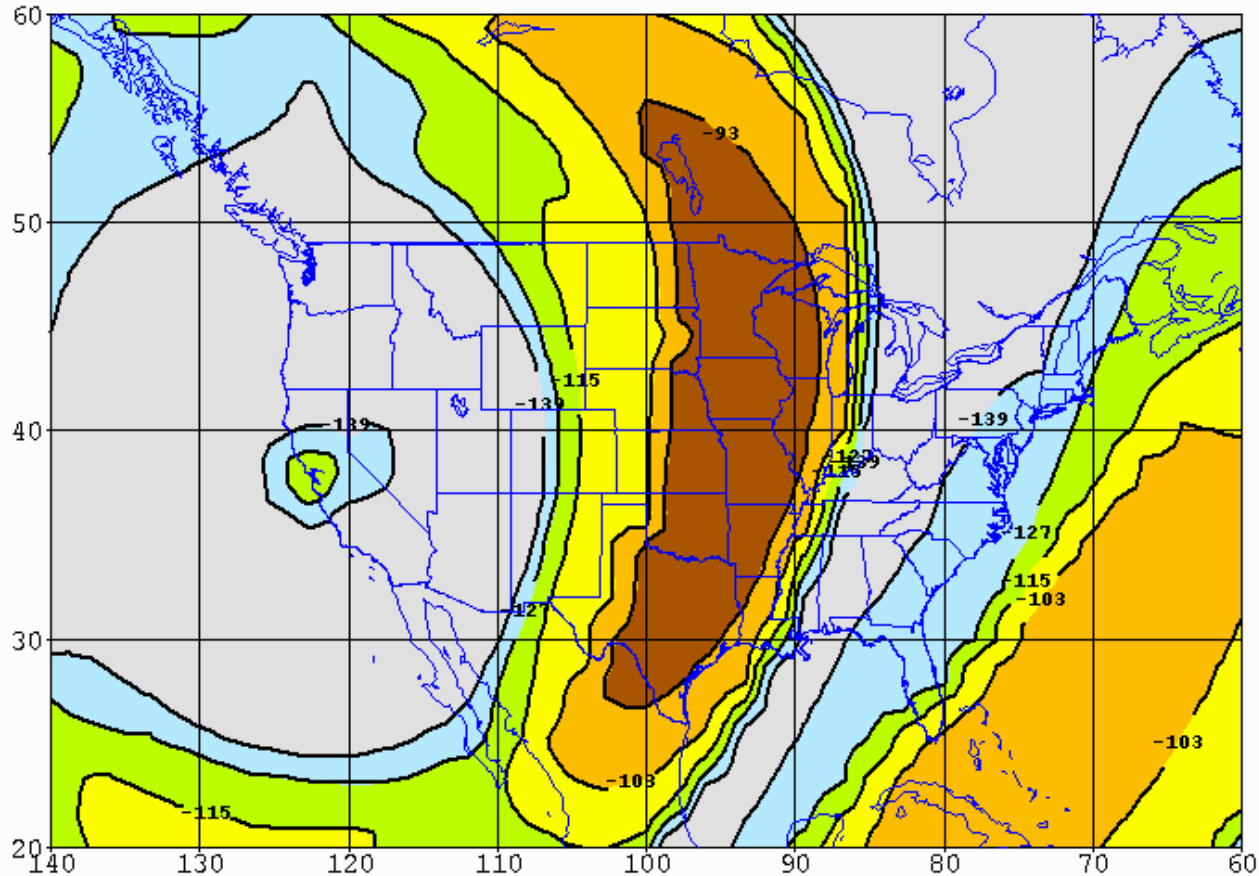

November 2005 Sweepstakes



Actual QSOs by N6BV in 2005 SS Phone, 21 UTC on 15 Meters

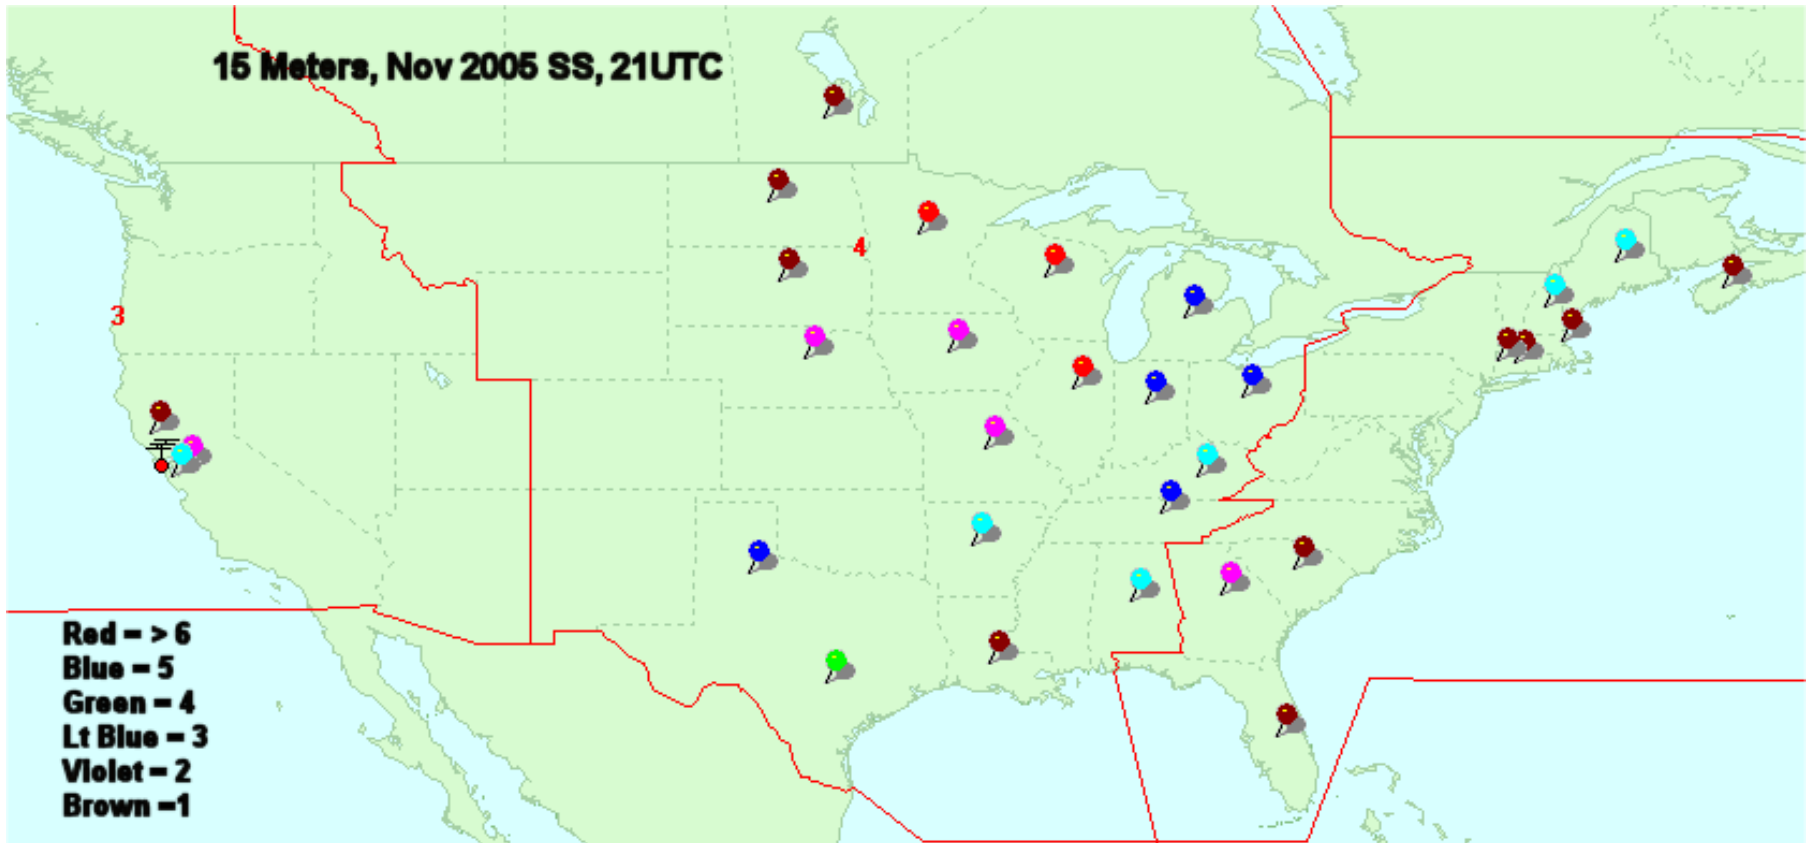


This format was generated using *DX Atlas*; courtesy K6TA/K6KO




Prediction

15 m
21 UTC

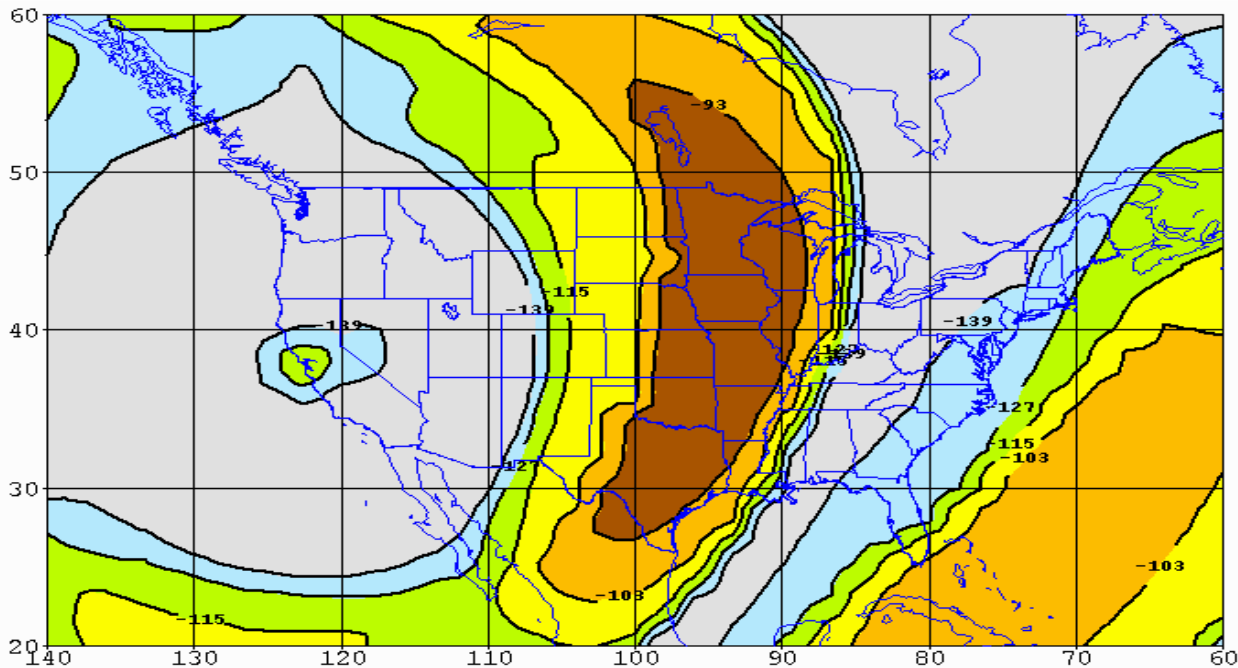


Actual

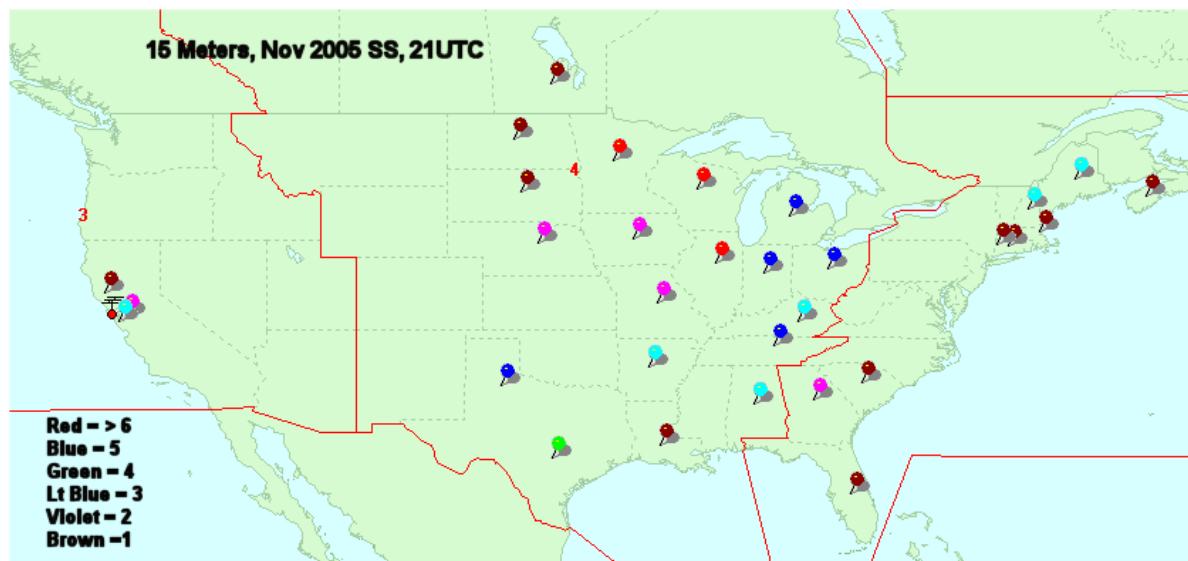



20 m
22 UTC

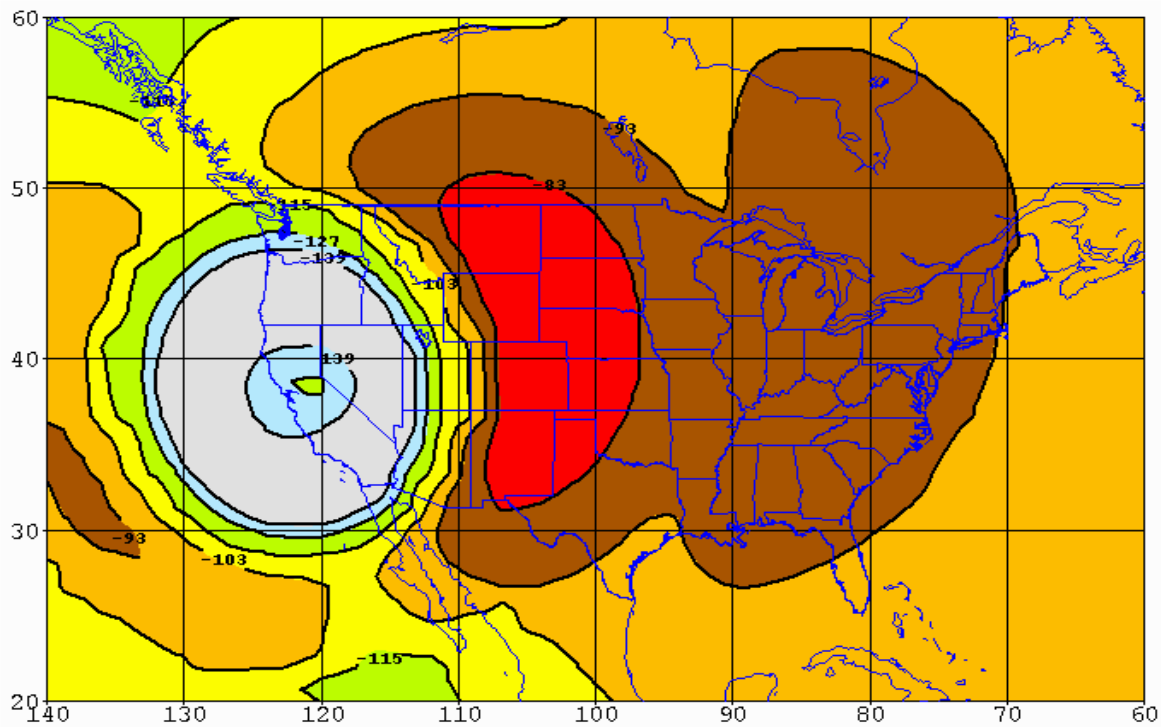




Low-Freq. Problems in *VOACAP*

- Since 6/2/1999 *VOACAP* has produced signal predictions lower than its predecessor *IONCAP* on bands lower than 40 meters.
- The problem lies in a change in calculations made then for the loss through the E layer.
- VOA has no validation data below 5 MHz because they had no stations there.
- *CAPMan* does produce more believable low-frequency computations, but source code is gone.




Comparing Versions of *VOACAP*


Transmission Loss as a Function of Frequency
Jamaica to Warsaw, SSN = 100, November, 01 UTC

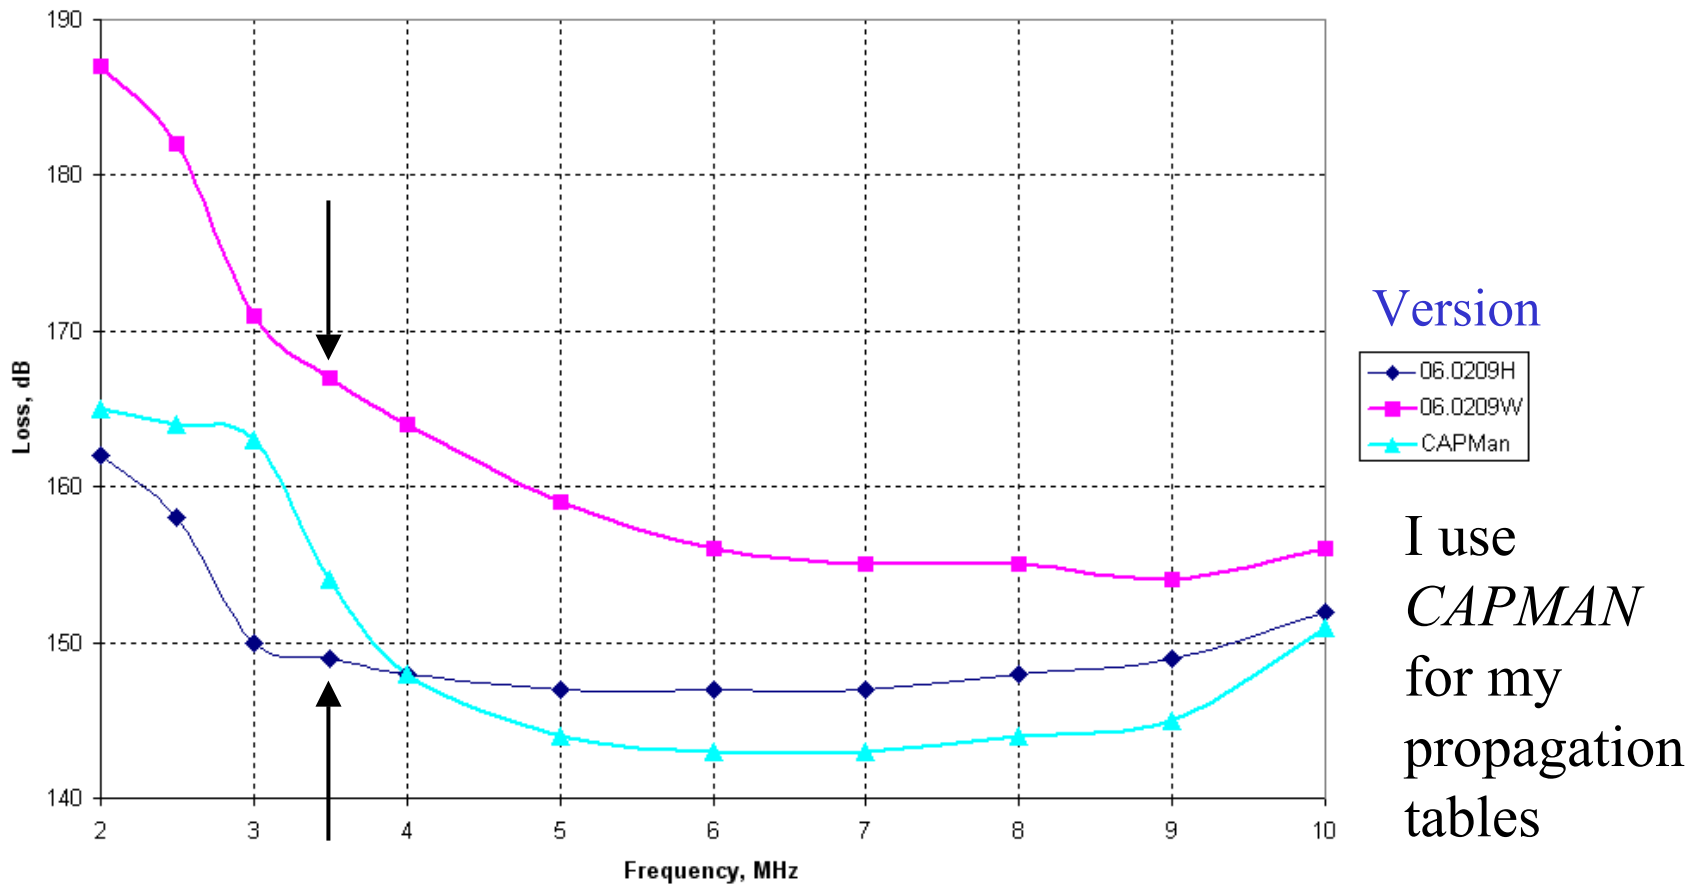

About 18 dB difference on 80 meters for “I” version (standing for *IONCAP*).

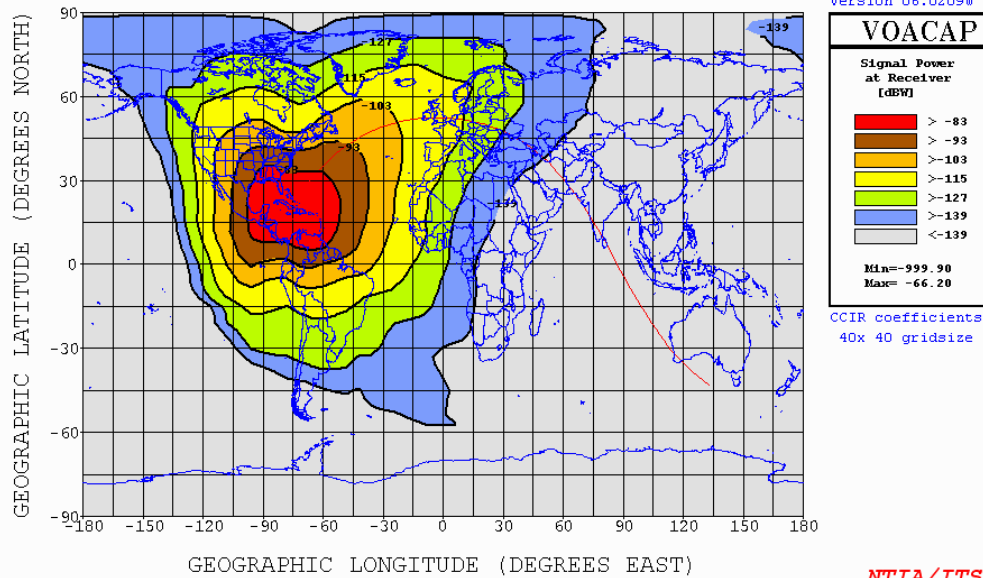

80 meters,
after 6/2/99

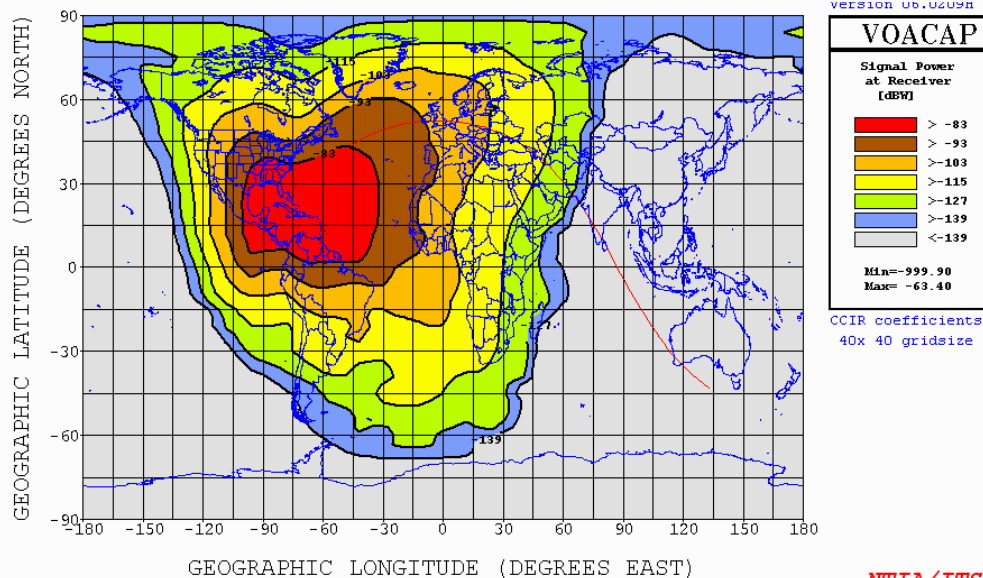

Pre 6/2/99

Stronger signals
into Europe are
more believable
from experience,
("I" version).



Low-Freq. Problems in *VOACAP*

- Even after retiring from government service, Greg Hand and George Lane, the people who helped develop *VOACAP*, have continued its development. Bless them!
- Greg will soon be posting a version of a new *VOACAP/VOAAREA* that includes the “I” option.



In Conclusion

- I've demonstrated some intuitive area-coverage predictions using *VOAAREA*.
- I have also touched on how to make customized antennas for *VOAAREA*.
- And by the way, the plots shown here involve a great deal of graphical manipulation by hand!